

DESIGNER INFORMATION

For line information, see PM-110.

For projects not on the Primary system the following substitutions may be made. See plan sheets for substitutions.

 $\begin{array}{l} \mathsf{ELW6} \rightarrow \mathsf{ELW4} \\ \mathsf{CHY10} \rightarrow \mathsf{CHY8} \\ \mathsf{NPY6} \rightarrow \mathsf{NPY4} \\ \mathsf{BCY6} \rightarrow \mathsf{BCY4} \\ \mathsf{DCY6} \rightarrow \mathsf{DCY4} \end{array}$

(1) If less than 400 feet, join solid yellow lines.

Possible Contract Item: Pavement Marking Line Items

Possible Tabulation: 108-22



REVISIONS:

Modified line widths from 4 inches and 8 inches to 6 inches and 10 inches.


REVISION

PM-210

4 10-15-24

APPROVED BY DESIGN METHODS ENGINEER

SEPARATION IN TWO-LANE ROADWAY

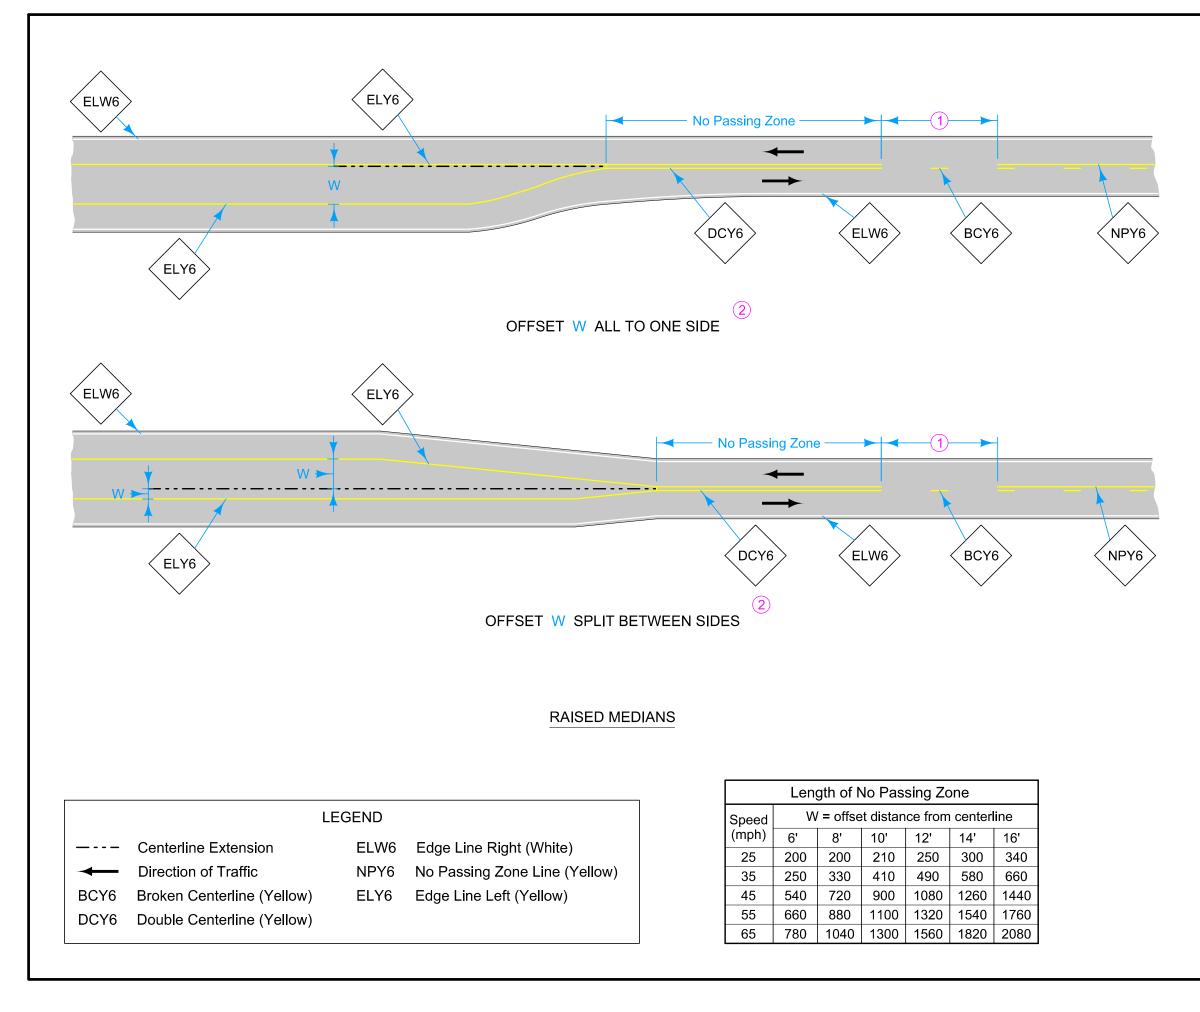

Paint the edge line along the taper and 50 feet of the parallel curbing. If the distance between edge lines is 100 feet or less, connect them.

- 1) If less than 400 feet, join solid yellow lines.
- 2 The offset distance from centerline, W, can be either the entire width of the offset if the offset is all to one side, or it is the larger of the two partial offsets if the entire width of the offset is split between the two directions of traffic. Measure W from the midpoint of the centerline to the outside edge of the painted curb.

