




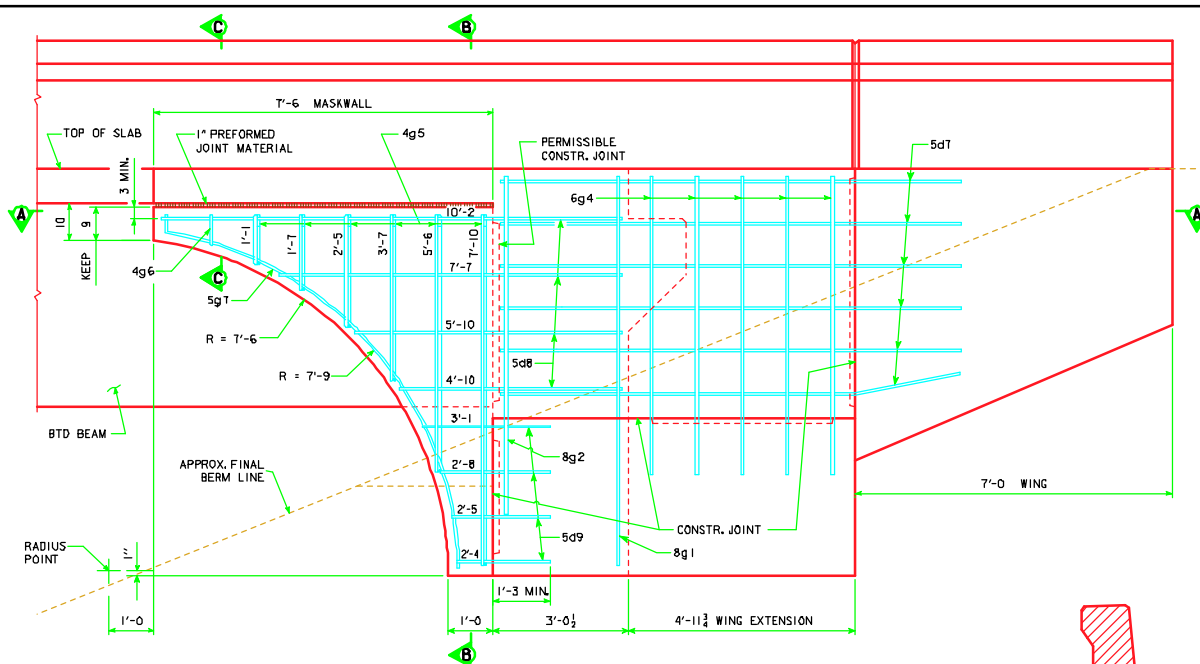


ELEVATION AT ABUTMENT

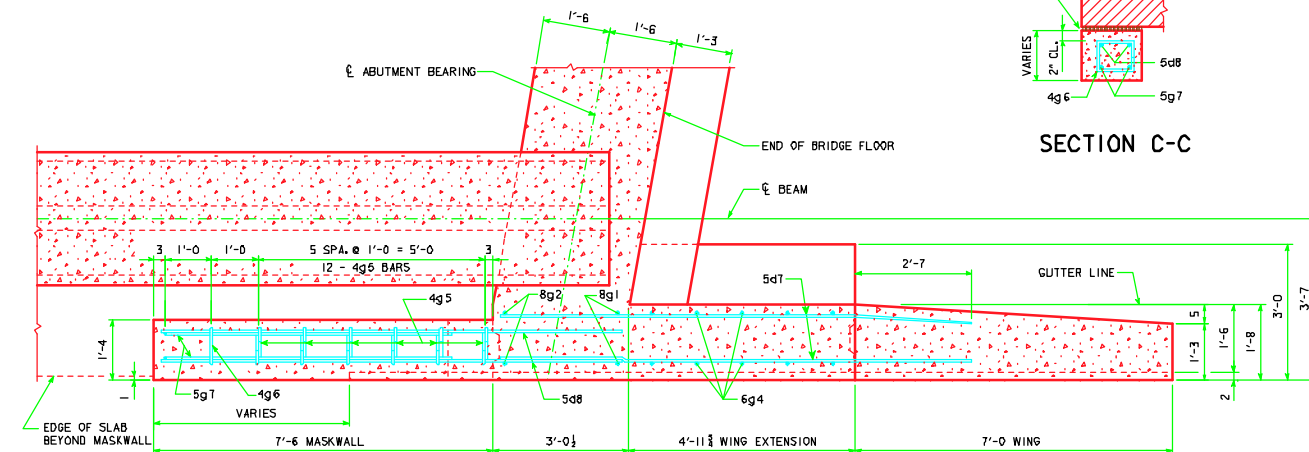

SECTION A-A



SECTION C-C

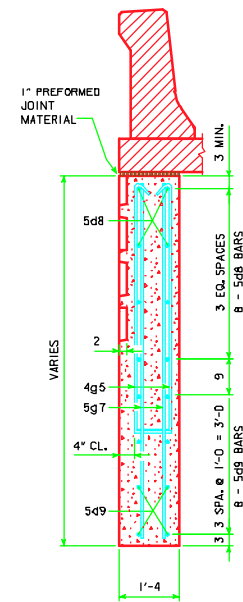

SECTION B-B

ABUTMENT & MASKWALL NOTES:

MINIMUM CLEAR DISTANCE FROM FACE OF CONCRETE TO NEAR REINFORCING BAR IS TO BE 2" UNLESS OTHERWISE NOTED OR SHOWN.

THE MASKWALL IS TO BE POURED BEFORE THE SLAB IS POURED.

SEE BT40-SA3-04 FOR QUANTITIES.

SEE BT40-SAT-04 FOR REINFORCING BAR LIST.

SEE BT40-AS1-04 FOR RUSTICATION DETAILS.



Iowa Department of Transportation
Highway Division

STANDARD DESIGN - 40' ROADWAY, 2 SPAN BRIDGES

**PRETENSIONED PRESTRESSED
BULB TEE CONCRETE BEAM BRIDGES**

ALL SPANS

JULY, 2004

MASKWALL DETAILS

10° SKEW

BT40-AB6-04