

[illegible]

| TABLE OF OPEN RAIL DIMENSIONS AND NUMBERS |              |        |         |         |         |         |          |         |         |        |         |         |         |        |         |         |              |               |  |  |  |  |  |  |  |  |  |
|-------------------------------------------|--------------|--------|---------|---------|---------|---------|----------|---------|---------|--------|---------|---------|---------|--------|---------|---------|--------------|---------------|--|--|--|--|--|--|--|--|--|
| ℰ-ℰ ABUT. BRG                             |              | 201'-4 |         |         |         | 213'-10 |          |         |         | 226'-4 |         |         |         | 243'-0 |         |         |              | ℰ-ℰ ABUT. BRG |  |  |  |  |  |  |  |  |  |
| SKEW                                      |              | 0°     | 15°     | 30°     | 45°     | 0°      | 15°      | 30°     | 45°     | 0°     | 15°     | 30°     | 45°     | 0°     | 15°     | 30°     | 45°          | SKEW          |  |  |  |  |  |  |  |  |  |
| DIMENSION OR NUMBER                       | L (F.T.-IN.) | 228'-4 | 228'-4  | 228'-4  | 228'-4  | 240'-10 | 240'-10  | 240'-10 | 240'-10 | 253'-4 | 253'-4  | 253'-4  | 253'-4  | 270'-0 | 270'-0  | 270'-0  | 270'-0       | L (F.T.-IN.)  |  |  |  |  |  |  |  |  |  |
|                                           | S (F.T.-IN.) | 204'-4 | 204'-5½ | 204'-9½ | 205'-6½ | 216'-10 | 216'-11½ | 217'-3½ | 218'-0½ | 229'-4 | 229'-5½ | 229'-9½ | 230'-6½ | 246'-0 | 246'-1½ | 246'-5½ | 247'-2½      | S (F.T.-IN.)  |  |  |  |  |  |  |  |  |  |
|                                           | B            | 26     | 26      | 26      | 26      | 27      | 27       | 27      | 27      | 29     | 29      | 29      | 29      | 31     | 31      | 31      | 31           | B             |  |  |  |  |  |  |  |  |  |
|                                           | C (F.T.-IN.) | 7'-8½  | 7'-8½   | 7'-8½   | 7'-9    | 7'-10½  | 7'-10½   | 7'-11½  | 7'-11½  | 7'-9½  | 7'-9½   | 7'-9½   | 7'-9½   | 7'-9½  | 7'-9½   | 7'-9½   | 7'-10½       | C (F.T.-IN.)  |  |  |  |  |  |  |  |  |  |
|                                           | D (F.T.-IN.) | 200'-4 | 200'-5½ | 200'-9½ | 201'-6½ | 212'-10 | 212'-11½ | 213'-3½ | 214'-0½ | 225'-4 | 225'-5½ | 225'-9½ | 226'-6½ | 242'-0 | 242'-1½ | 242'-5½ | 243'-2½      | D (F.T.-IN.)  |  |  |  |  |  |  |  |  |  |
| E                                         | 25           | 25     | 25      | 25      | 26      | 26      | 26       | 26      | 28      | 28     | 28      | 28      | 30      | 30     | 30      | 30      | E            |               |  |  |  |  |  |  |  |  |  |
| F (F.T.-IN.)                              | 5'-0         | 4'-11½ | 4'-9½   | 4'-5    | 5'-0    | 4'-11½  | 4'-9½    | 4'-4½   | 5'-0    | 4'-11½ | 4'-9½   | 4'-4½   | 5'-0    | 4'-11½ | 4'-9½   | 4'-4½   | F (F.T.-IN.) |               |  |  |  |  |  |  |  |  |  |


CONSTRUCTION JOINT BETWEEN TOP OF WING AND RAIL IS ROUGHENED CONCRETE.

MINIMUM CLEAR DISTANCE FROM FACE OF CONCRETE TO NEAR REINFORCING BAR IS TO BE 2" UNLESS OTHERWISE NOTED OR SHOWN.

THE CONCRETE OPEN RAIL IS TO BE BID ON A LINEAL FOOT BASIS MEASURED FROM END TO END OF RAIL. THE NUMBER OF LINEAL FEET OF OPEN RAIL INSTALLED WILL BE PAID FOR AT THE CONTRACT PRICE PER LINEAL FOOT. PRICE BID FOR "CONCRETE OPEN RAILING, TL-4" SHALL BE FULL COMPENSATION FOR FURNISHING ALL MATERIAL, EXCLUDING REINFORCING STEEL, AND ALL OF THE EQUIPMENT AND LABOR REQUIRED TO CONSTRUCT THE RAIL IN ACCORDANCE WITH THESE PLANS AND CURRENT SPECIFICATIONS.


ALL OPEN RAIL REINFORCING STEEL IS TO BE INCLUDED WITH THE SUPERSTRUCTURE REINFORCING STEEL.

THE CAST-IN-PLACE OPEN RAIL SHALL USE CLASS C MIX. CLASS D CONCRETE IS NOT PERMITTED.

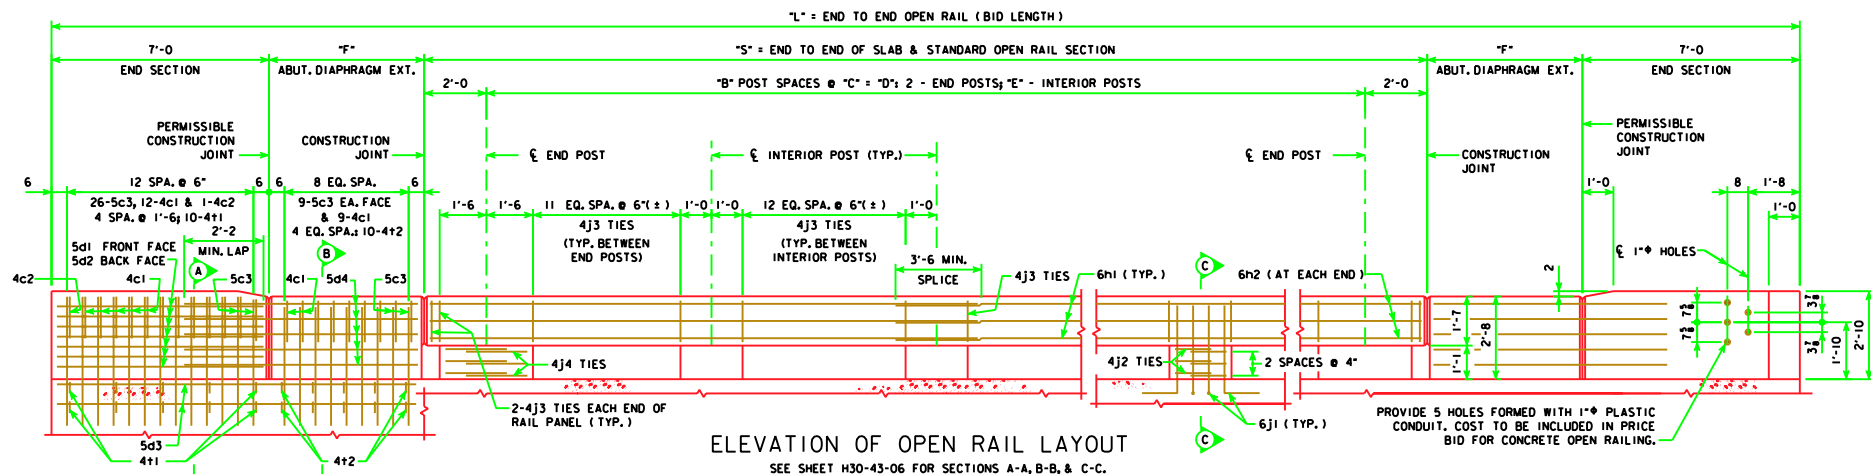

### ELEVATION OF OPEN RAIL LAYOUT

SEE SHEET H30-43-06 FOR SECTIONS A-A, B-B, & C-C.

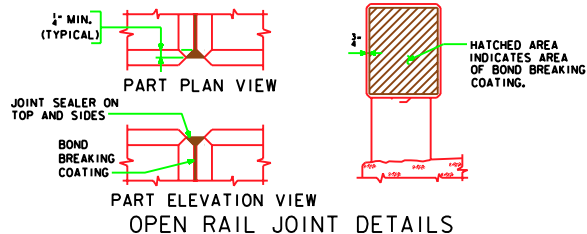

**LATEST REVISION DATE**

Marken L. M. Dwyer



**Iowa Department of Transportation**  
*Highway Division*

STANDARD DESIGN - 30' ROADWAY, THREE SPAN BRIDGES

## PRETENSIONED PRESTRESSED CONCRETE BEAM BRIDGES

HL93 SUPERSTRUCTURE      DECEMBER, 2006      HS25 SUBSTRUCTURE

OPEN RAIL, TL-4 DETAILS  
SHEET 1 OF 2

H30-42-06