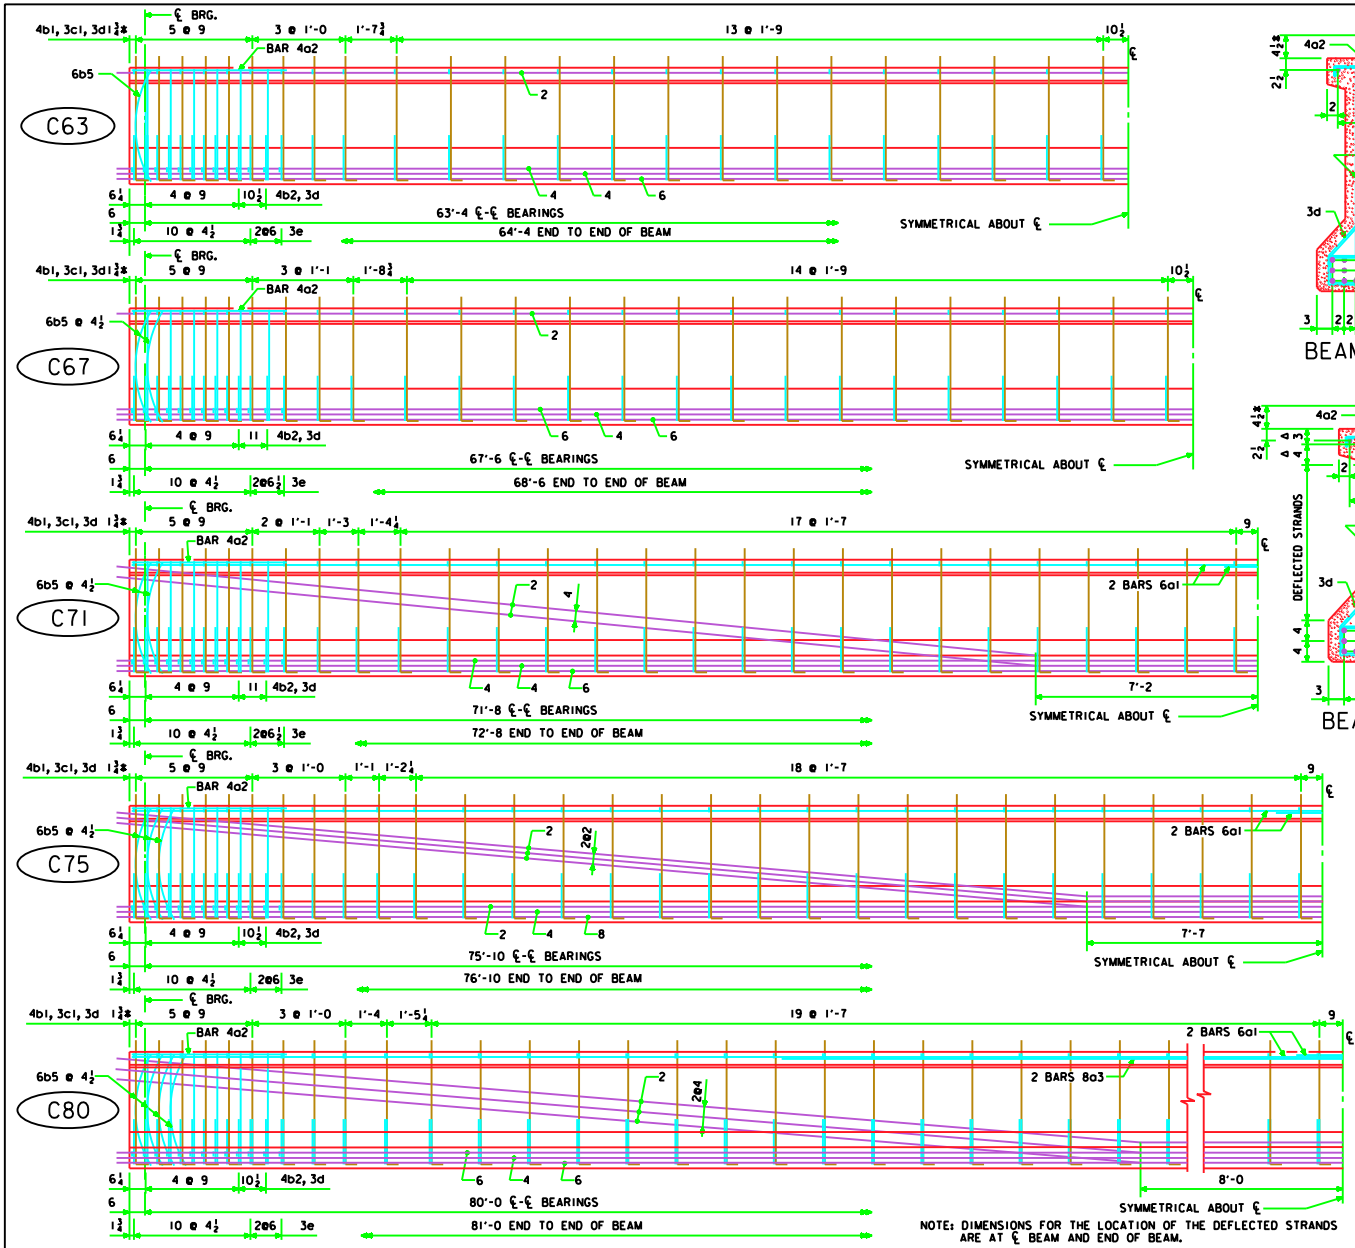

NOTE: DIMENSIONS FOR THE LOCATION OF THE DEFLECTED STRANDS ARE AT ℄ BEAM AND END OF BEAM.

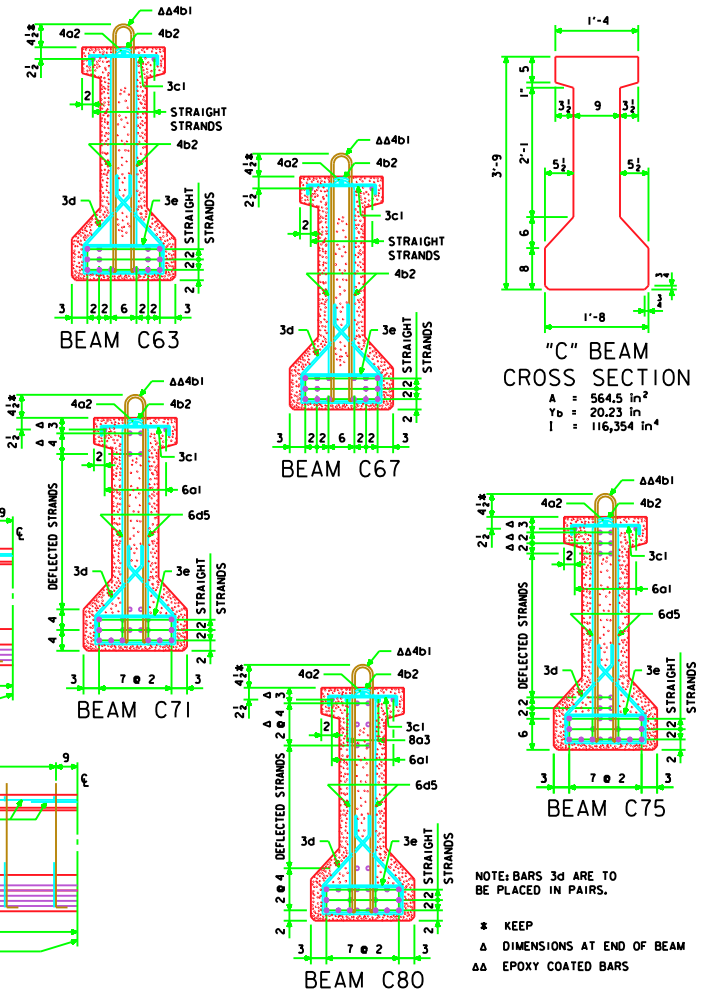

NOTE: BARS 3d ARE TO BE PLACED IN PAIRS.

* KEEP

Δ DIMENSIONS AT END OF BEAM

ΔΔ EPOXY COATED BARS

LATEST REVISION DATE	APPROVED BY BRIDGE ENGINEER	Iowa Department of Transportation Highway Division	
		STANDARD DESIGN - 40' ROADWAY, THREE SPAN BRIDGE PRETENSIONED PRESTRESSED CONCRETE BEAM BRIDGES DECEMBER, 2006 HL93 LOADING	
		C BEAM DETAILS	H40-37-06