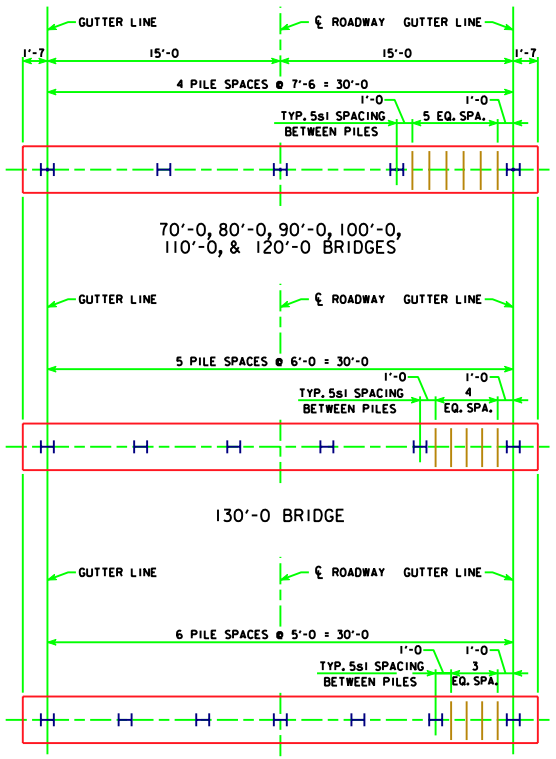


PILE PLAN - 0° SKEW
STEEL PILING

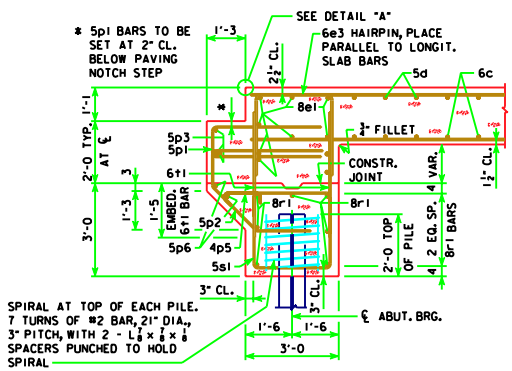


SECTION NORMAL TO ABUTMENT AT ℄

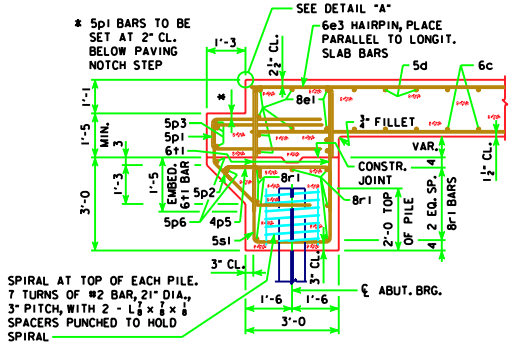


SECTION NORMAL TO ABUTMENT AT GUTTERLINE

DETAIL "A"

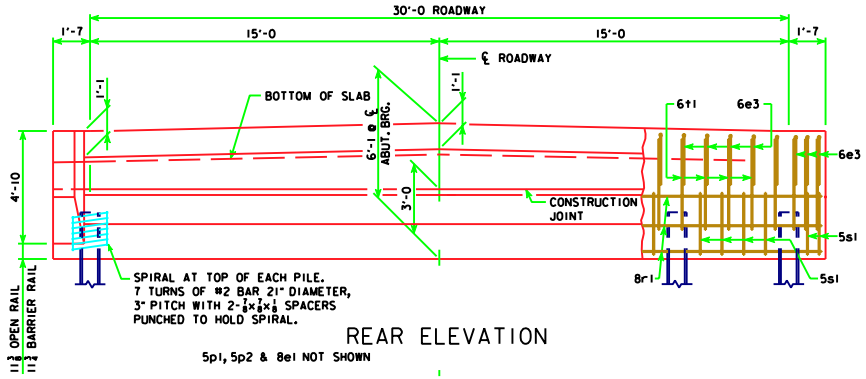


REAR ELEVATION

5p1, 5p2 & 8e1 NOT SHOWN

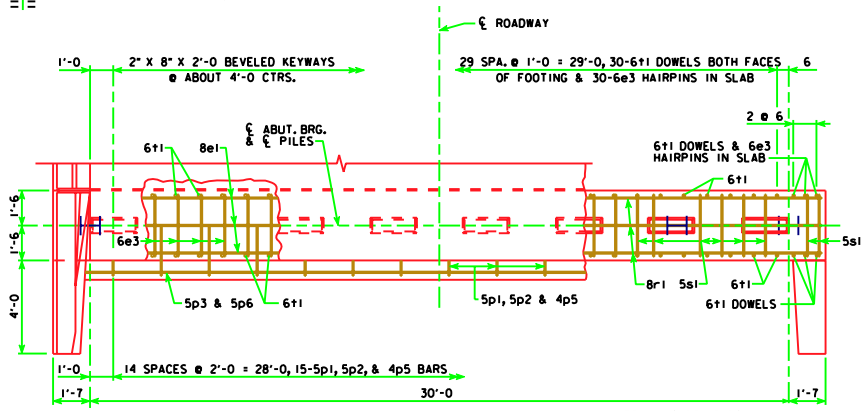


PLAN VIEW

NOTE: WING REINFORCING AND RAIL NOT SHOWN.

5p1, 5p3, 6e3 AND 8e1 ARE INCLUDED WITH SUPERSTRUCTURE QUANTITIES.

| REACTION, PILE NUMBER & BEARING | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| BRIDGE LENGTH | 70'-0 | 80'-0 | 90'-0 | 100'-0 | 110'-0 | 120'-0 | 130'-0 | 140'-0 | 150'-0 |
| REACTION - KIPS | 265 | 287 | 306 | 325 | 344 | 366 | 387 | Δ 449 | Δ 474 |
| BEARING - TONS | 27 | 29 | 31 | 33 | 35 | 37 | 33 | 33 | 34 |
| PILING - NUMBER | 5 | 5 | 5 | 5 | 5 | 5 | 6 | 7 | 7 |

ΔINCLUDES IMPACT

## ABUTMENT NOTES:

ALL PILING HP 10 X 42.

THE CONCRETE AND REINFORCING STEEL FOR THE WINGS IS INCLUDED WITH THE SUPERSTRUCTURE.

DETAILS ON THIS SHEET ARE TO BE USED ONLY WHEN ABUTMENTS ARE PLACED ON STEEL PILES. IF ROCK IS ENCOUNTERED CLOSER THAN 12' BELOW ABUTMENT FOOTING, SPECIAL ANALYSIS MAY BE REQUIRED.

THE MINIMUM CLEAR DISTANCE FROM THE FACE OF THE CONCRETE TO NEAR REINFORCING BAR IS TO BE 2 INCHES UNLESS OTHERWISE NOTED OR SHOWN.

STEEL PILING USED AS FRICTION PILE SHALL BE DRIVEN TO FULL PENETRATION IF PRACTICABLE BUT IN NO CASE TO A BEARING VALUE LESS THAN THE PILE BEARING REQUIRED FOR EACH BRIDGE LENGTH AS SHOWN ON THIS SHEET.

ALL REINFORCING STEEL IS TO BE GRADE 60.

ABUTMENT PILING WAS DESIGNED FOR HS25 LOADING WITH AN ALLOWANCE FOR 20 LBS. PER SQ. FT. FUTURE WEARING SURFACE.

LATEST REVISION DATE

APPROVED BY BRIDGE ENGINEER

Iowa Department of Transportation
Highway Division

STANDARD DESIGN - 30' ROADWAY, 3 SPAN BRIDGES

# CONTINUOUS CONCRETE SLAB BRIDGES

NOVEMBER, 2006

ABUTMENT DETAILS
0° SKEW - STEEL PILING

J30-34-06