


#### GENERAL NOTES:

This Plan illustrates construction details for field fence and deer fence termination at bridges.

Fence termination at bridges as detailed hereon shall not be paid for separately but shall be included with and considered incidental to the bid item "Field Fence" or "Deer Fence".

- ① Position post so distance between post and bridge rail does not exceed 75 mm.
- ② Volume of concrete encasement is 0.0425 cubic meters, or approximately four 22.7kg bags of commercial concrete mix.

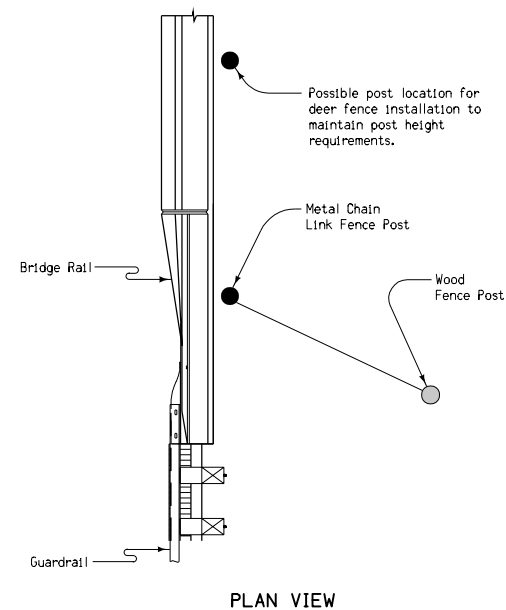

All dimensions given in millimeters unless noted.

<b>M</b>	Iowa Department of Transportation	
	Highway Division	
	<b>STANDARD ROAD PLAN</b>	<b>RC-9B</b>
	REVISION: NEW	REVISION NO. NEW
	APPROVED BY <i>William J. Sten</i> DESIGN METHODS ENGINEER	REVISION DATE 04-30-02
<b>METRIC VERSION</b>	<b>FENCE TERMINATION AT BRIDGES</b>	