

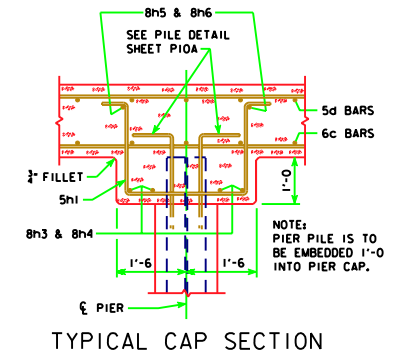
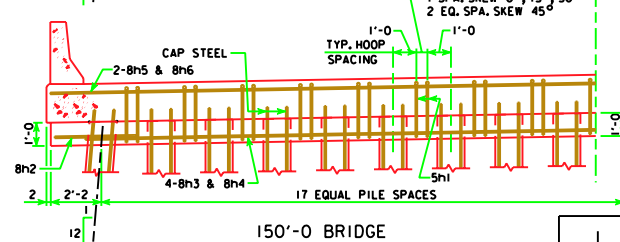
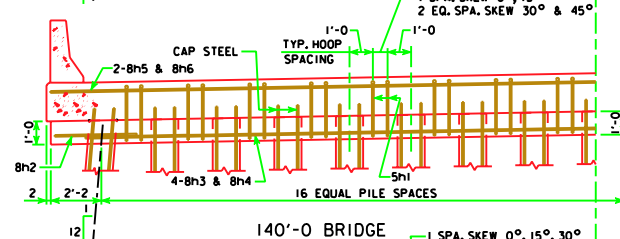
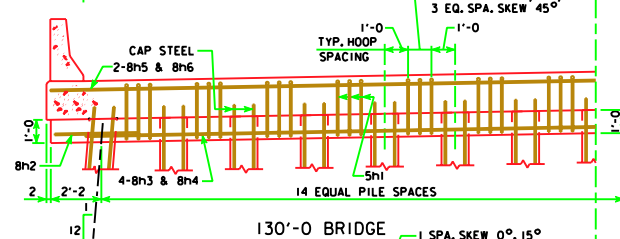
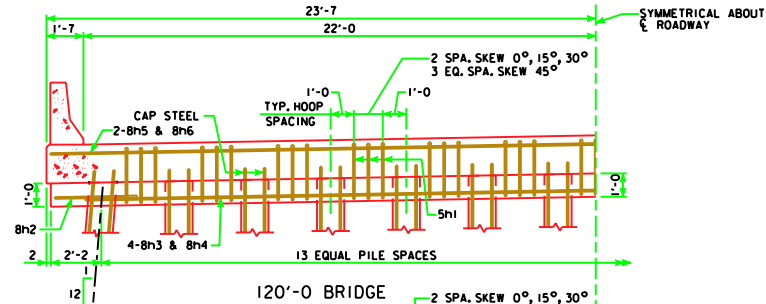
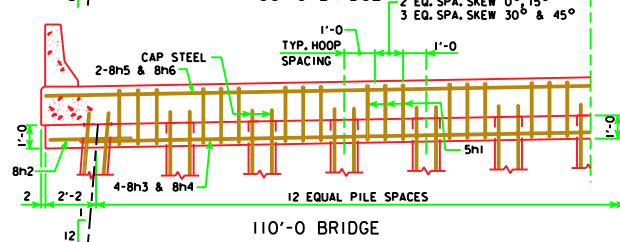
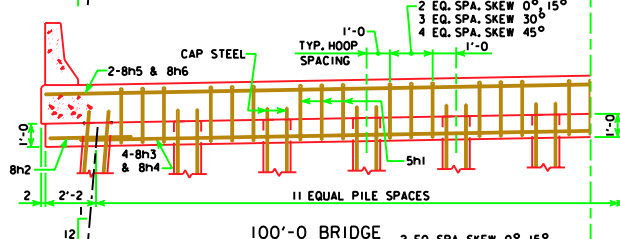


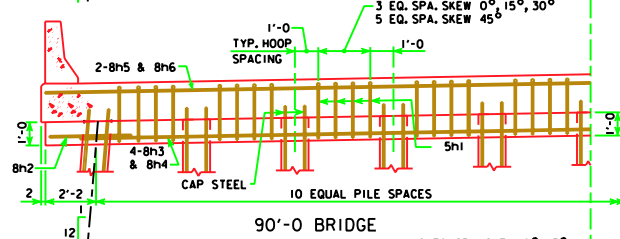

HALF SECTION NEAR PIER
SHOWING STIRRUP SPACING AND NUMBER OF PILING
NOTE: BOTTOM OF CAP ELEVATIONS WILL BE REQUIRED AT THE
OF ROADWAY AND AT EACH EXTERIOR PILE.

LATEST REVISION DATE

APPROVED BY BRIDGE ENGINEER

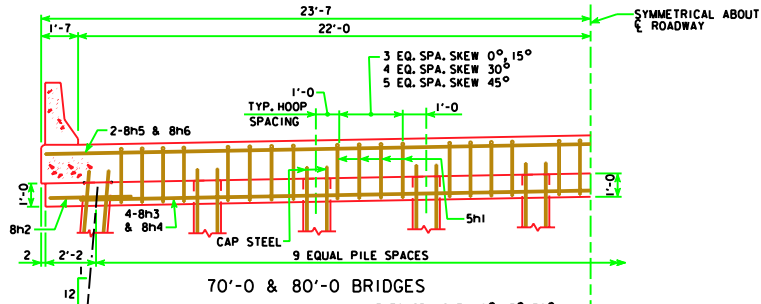

Iowa Department of Transportation
Highway Division

STANDARD DESIGN - 44' ROADWAY, 3 SPAN BRIDGES
CONTINUOUS CONCRETE
SLAB BRIDGES
NOVEMBER, 2006

MONOLITHIC PIER CAP DETAILS
ALL BRIDGES

J44-26-06