


Hot Mix Asphalt  
Widening on Existing  
Pavement Without Curb

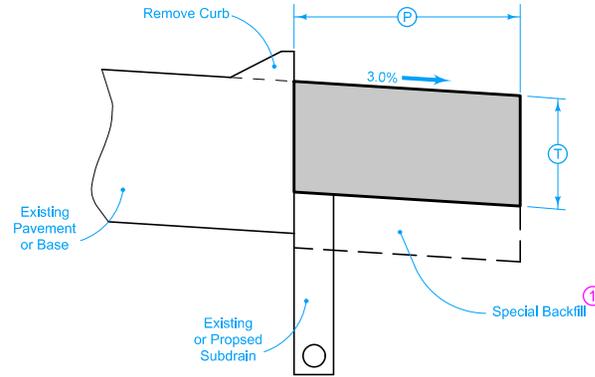

Hot Mix Asphalt  
Widening on Existing  
Pavement With Curb

'P' and 'T' are specified by the individual project plans. Dimensions may vary for superelevated curves or at locations specifically designated by the Engineer.

Handle excavated asphalt materials as detailed elsewhere in the project plans.

Construct special shaping of widening units through bridge approach sections as directed by the Engineer.

Excavation in excess of that indicated is incidental to other work on the project.

Place Special Backfill only at locations where specifically required by the Engineer. This work will be paid for as "Extra Work" as per Article 1109.03 of the Standard Specifications.

① 6 inches of Special Backfill required when widening unit is part of the proposed traffic lane or when noted in project plans.

Possible Contract Items:  
Base Widening, Hot Mix Asphalt Mixture  
Removal of Curb  
Removal of Flumes  
Excavation, Class 13, For Widening  
Special Backfill  
Asphalt Binder

Possible Tabulations:  
106-5  
110-4  
110-3

<b>IOWA DOT</b>	REVISION	
	1	04-21-20
<b>STANDARD ROAD PLAN</b>		<b>PV-203</b>
		SHEET 1 of 1
REVISIONS: New Isgo.		
<i>Scott Miller</i>		
APPROVED BY DESIGN METHODS ENGINEER		
<b>HMA BASE WIDENING</b>		