



MILEPOST MARKER  
SHOULDER ERECTION

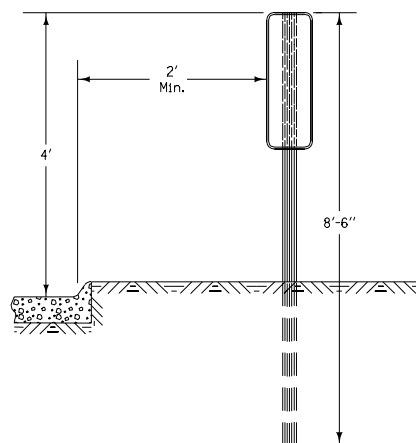

MILEPOST MARKER  
CURB ERECTION



Aluminum bolts, self-locking nuts, and washers.  
 $\frac{5}{16}$ " x  $2\frac{1}{4}$ " - 18 NC hex bolts and hex self-  
locking nuts with washers  $\frac{11}{32}$ " I.D. x  $\frac{11}{16}$ "  
O.D. x 0.091".

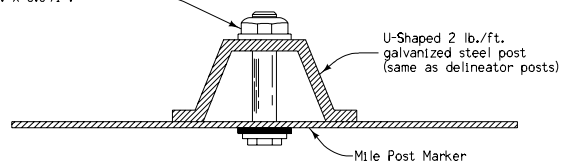


TOP VIEW  
MILEPOST MARKER ASSEMBLY


NOTES:

Material = 0.080" sheet aluminum.  
Holes =  $\frac{7}{16}$ " diameter holes located as indicated.  
Numerals = smooth silver reflective sheeting  
Background = smooth green reflective sheeting.

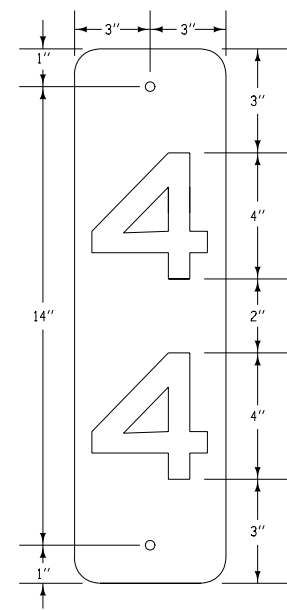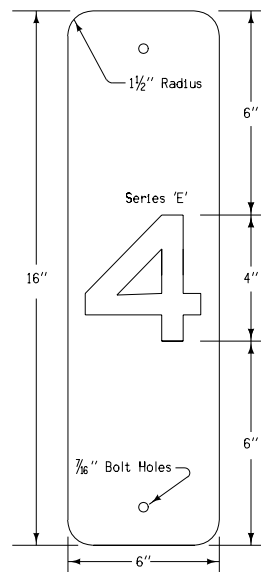

MILEPOST MARKER

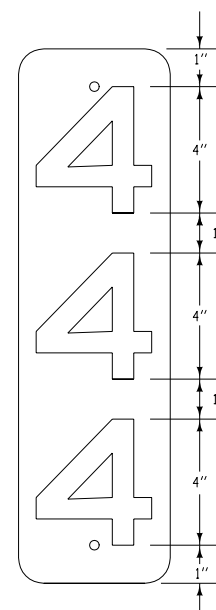

 <b>Iowa Department of Transportation</b> Highway Division	
<b>STANDARD ROAD PLAN RD-29</b>	
REVISION: Delete Specification Reference	REVISION NO. 1
APPROVED BY: <i>William J. Allen</i> DESIGN METHODS ENGINEER	REVISION DATE 10-21-03
<b>ERECTION DETAILS FOR MILEPOST MARKERS (PRIMARY ROAD SYSTEM)</b>	