




MILEPOST MARKER DETAILS FRONT VIEW

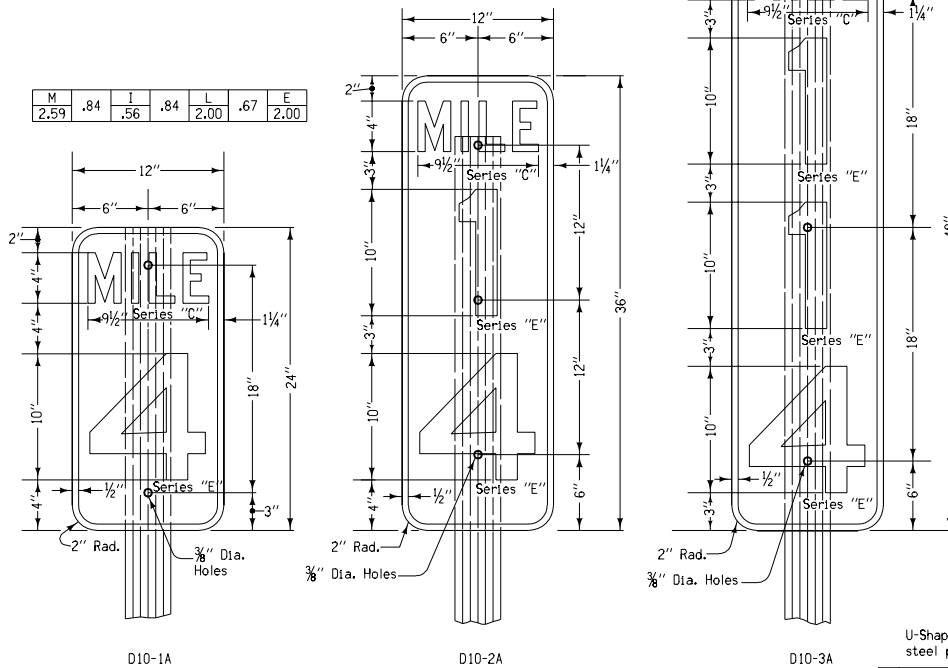


Aluminum bolts, self-locking nuts, and washers.
5/8" x 2 1/4" - 18 NC hex bolts and hex self-locking nuts with washers 1 1/2" I.D. x 1 1/8" O.D. x 0.091".

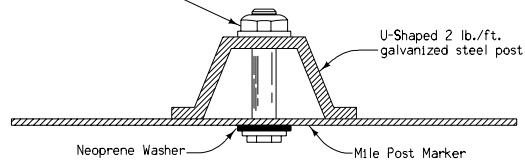

TOP VIEW
MILEPOST MARKER ASSEMBLY

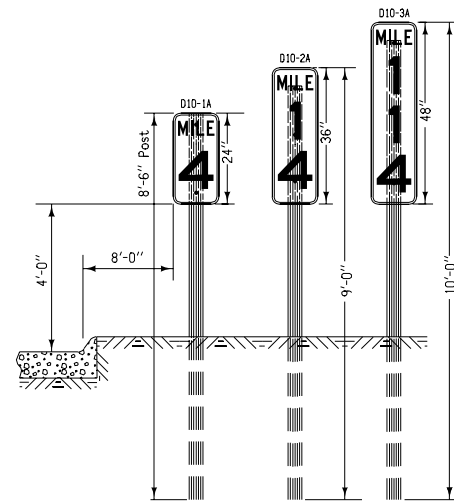

MILEPOST MARKER - CURB ERECTION

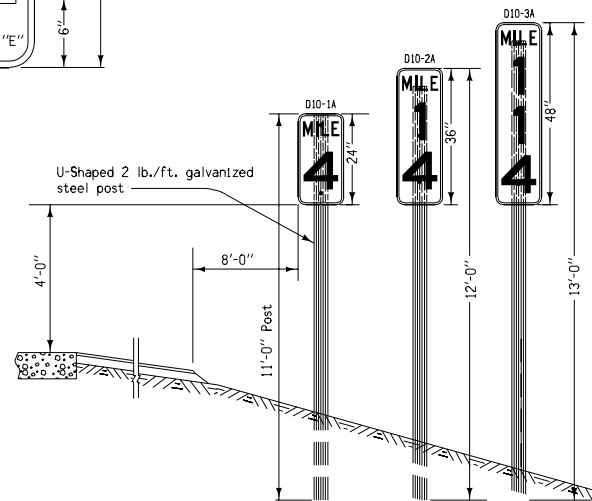

MILEPOST MARKER - SHOULDER ERECTION

NOTES:
Material = 0.125" sheet aluminum
Holes = 3/8" dia. holes located as indicated
Letters = 4" Series C
Numerals = 10" Series E
Border, letters and numerals = smooth silver reflective sheeting
Background = green reflective sheeting
POSTS
Contractor will furnish and install Type I delineator posts as specified by the Standard Specification.

STANDARD ROAD PLAN RD-30	
REVISION: NEW	REVISION NO. NEW
APPROVED BY: <i>William J. Allen</i> DESIGN METHODS ENGINEER	REVISION DATE 04-15-03
FABRICATION AND ERECTION DETAILS FOR MILEPOST MARKERS	