EPOXY COATED REINFORCING STEEL-TWO OPEN RAILS

(NOTE: THESE REINFORCING BARS TO BE USED ON ALL SKEWS)

BRIDGE LENGTH			138'-10			151'-4			163'-10			176'-4			188'-10			201'-4			213'-10			226'-4			243'-0		
BAR	LOCATION	SHAPE	NO.	LENGTH	WEIGHT	NO.	LENGTH	WEIGHT	NO.	LENGTH	WEIGHT	NO.	LENGTH	WEIGHT	NO.	LENGTH	WEIGHT	NO.	LENGTH	WEIGHT	NO.	LENGTH	WEIGHT	NO.	LENGTH	WEIGHT	NO.	LENGTH	WEIGHT
6c1	VERTICAL, END SECTION & ABUT. DIAPH. EXT.	—	96	4'-11	709	96	4'-11	709	96	4'-11	709	96	4'-11	709	96	4'-11	709	168	4'-11	1,241	168	4'-11	1241	168	4'-11	1241	168	4'-11	1241
6c2	VERTICAL, END SECTION	—	16	2'-10	68	16	2'-10	68	16	2'-10	68	16	2'-10	68	16	2'-10	68	16	2'-10	68	16	2'-10	68	16	2'-10	68	16	2'-10	68
6c3	VERTICAL, END SECTION	—	16	4'-1	98	16	4'-1	98	16	4'-1	98	16	4'-1	98	16	4'-1	98	16	4'-1	98	16	4'-1	98	16	4'-1	98	16	4'-1	98
4c4	VERTICAL HOOPS, END SECTION	⊓	20	2'-10	38	20	2'-10	38	20	2'-10	38	20	2'-10	38	20	2'-10	38	20	2'-10	38	20	2'-10	38	20	2'-10	38	20	2'-10	38
4c5	VERT. HOOPS, END SEC. & ABUT. DIAPH. EXT.	⊓	16	3'-1	33	16	3'-1	33	16	3'-1	33	16	3'-1	33	16	3'-1	33	52	3'-1	107	52	3'-1	107	52	3'-1	107	52	3'-1	107
6d1	HORIZONTAL, END SECTION-BACK FACE	—	24	6'-8	240	24	6'-8	240	24	6'-8	240	24	6'-8	240	24	6'-8	240	24	6'-8	240	24	6'-8	240	24	6'-8	240	24	6'-8	240
6d2	HORIZONTAL, END SECTION-TRAFFIC FACE	⌒	32	6'-9	324	32	6'-9	324	32	6'-9	324	32	6'-9	324	32	6'-9	324	32	11'-2	537	32	11'-2	537	32	11'-2	537	32	11'-2	537
5d3*	HORIZONTAL, ABUT. DIAPH. EXT.-BOTH FACES	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	48	7'-2	359	48	7'-2	359	48	7'-2	359	48	7'-2	359
6h1	LONGITUDINAL, OPEN RAIL	—	24	40'-0	1,442	36	40'-0	2,163	36	40'-0	2,163	36	40'-0	2,163	48	40'-0	2,884	48	40'-0	2,884	48	40'-0	2,884	60	40'-0	3,605	60	40'-0	3,605
6h2	LONGITUDINAL, OPEN RAIL, ENDS	—	24	36'-8	1,322	24	24'-8	889	24	30'-11	1,114	24	37'-2	1,340	24	25'-2	907	24	31'-5	1,133	24	37'-8	1,358	24	25'-8	925	24	34'-0	1,226
6j1	VERTICAL DOWELS, OPEN RAIL	⊓	312	4'-0	1,875	328	4'-0	1,971	360	4'-0	2,163	392	4'-0	2,355	408	4'-0	2,451	440	4'-0	2,644	456	4'-0	2,740	488	4'-0	2,932	520	4'-0	3,124
4j2	HOOP, INTERIOR POST	▭	272	4'-9	863	288	4'-9	914	320	4'-9	1,015	352	4'-9	1,117	368	4'-9	1,168	400	4'-9	1,269	416	4'-9	1,320	448	4'-9	1,422	480	4'-9	1,523
4j3	HOOP, OPEN RAIL	▭	472	5'-5	1,708	498	5'-5	1,802	550	5'-5	1,990	602	5'-5	2,178	628	5'-5	2,272	680	5'-5	2,460	706	5'-5	2,555	758	5'-5	2,743	810	5'-5	2,931
4j4	HOOP, END POST	▭	32	6'-7	141	32	6'-7	141	32	6'-7	141	32	6'-7	141	32	6'-7	141	32	6'-7	141	32	6'-7	141	32	6'-7	141	32	6'-7	141
4t1	WING FOOTING TIE BARS	⊓	16	VARIES	19	16	VARIES	19	16	VARIES	19	16	VARIES	19	16	VARIES	19	16	VARIES	19	16	VARIES	19	16	VARIES	19	16	VARIES	19
4t2	WING FOOTING TIE BARS	⊓	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	40	1'-11	51	40	1'-11	51	40	1'-11	51	40	1'-11	51
TOTAL LBS. (INCLUDE WITH SUPERSTRUCTURE REINFORCING)					8,880			9,409			10,115			10,823			11,352			13,289			13,756			14,526			15,308

* TRAFFIC FACE 5d3 BARS MAY REQUIRE FIELD CUTTING OR BENDING FOR HIGHER SKEW BRIDGES.

BENT BAR DETAILS

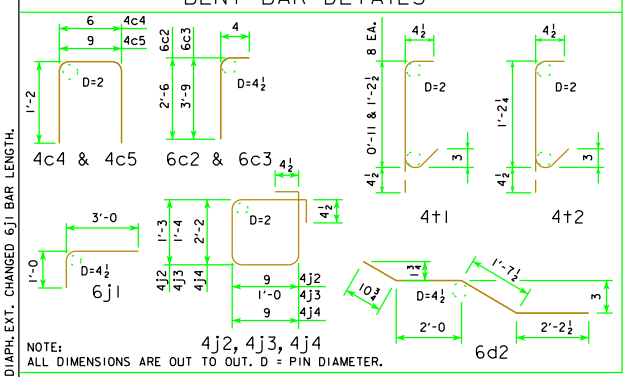

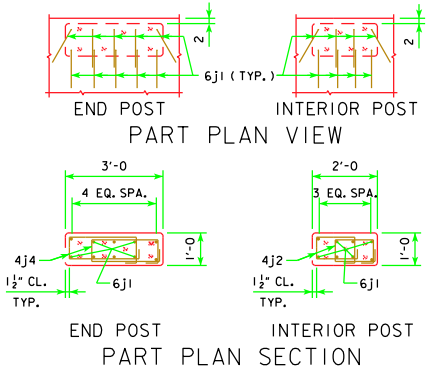

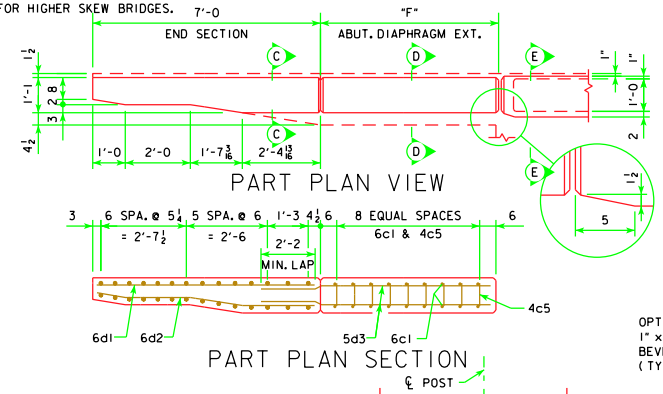



RAIL CHAMFER DETAIL

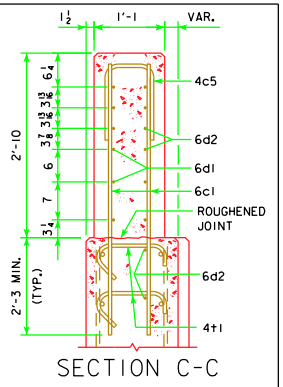





CONCRETE PLACEMENT SUMMARY - C.Y.

BRIDGE LENGTH		138'-10	151'-4	163'-10	176'-4	188'-10	201'-4	213'-10	226'-4	243'-0
OPEN RAIL SECTION	2 @ 0.077 CU. YDS. PER FT.	21.9	23.8	25.8	27.7	29.6	31.5	33.5	35.4	38.0
OPEN RAIL-END SECTION	4 @ 0.687 CU. YDS.	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7
OPEN RAIL-ABUT. DIAPH. SECTION	4 @ 0.107 CU. YDS. PER FT.	—	—	—	—	—	2.0	2.0	2.0	2.0
OPEN RAIL-END POSTS	4 @ 0.11 CU. YDS.	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4
OPEN RAIL-INTERIOR POSTS	2 x "E" @ 0.07 CU. YDS.	2.4	2.5	2.8	3.1	3.2	3.5	3.6	3.9	4.2
	TOTAL (C.Y.)	27.4	29.4	31.7	33.9	35.9	40.1	42.2	44.4	47.3

CONCRETE QUANTITIES SHOWN ARE BASED ON 30° SKEW. FOR "E" SEE SHEET H44-35-07.

OPEN CONCRETE RAIL, TL-4 QUANTITIES - L.F.

BRIDGE LENGTH	138'-10	151'-4	163'-10	176'-4	188'-10	201'-4	213'-10	226'-4	243'-0
OPEN CONCRETE RAILING, TL-4 0° SKEW	311.7	336.7	361.7	386.7	411.7	456.7	481.7	506.7	540.0
OPEN CONCRETE RAILING, TL-4 15° SKEW	311.9	336.9	361.9	386.9	411.9	456.7	481.7	506.7	540.0
OPEN CONCRETE RAILING, TL-4 30° SKEW	312.6	337.6	362.6	387.6	412.6	456.7	481.7	506.7	540.0

REVISED 07-10 - PROVIDED A 3/4" GAP BETWEEN RAIL AND ABUT. DIAPH. EXT. CHANGED 6j1 BAR LENGTH.

07-10
LATEST REVISION DATE

APPROVED BY BRIDGE ENGINEER

Iowa Department of Transportation
Highway Division

STANDARD DESIGN - 44' ROADWAY, THREE SPAN BRIDGE

PRETENSIONED PRESTRESSED CONCRETE BEAM BRIDGES

MARCH, 2007

OPEN RAIL, TL-4 DETAILS
SHEET 2 OF 2

H44-36-07