


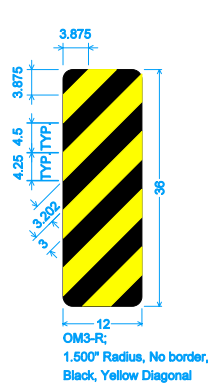



TYPE 1 OBJECT MARKERS

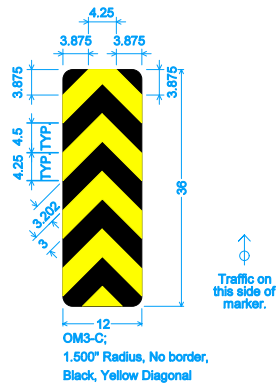


TYPE 2 OBJECT MARKER

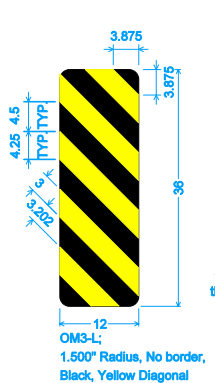

TYPE 3 OBJECT MARKERS

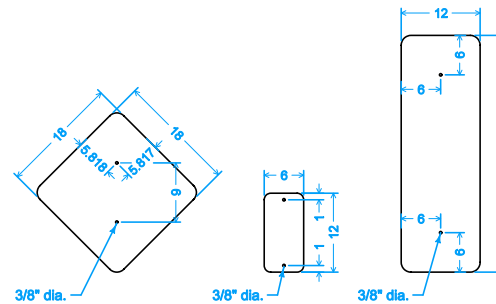

SIGN BLANKS

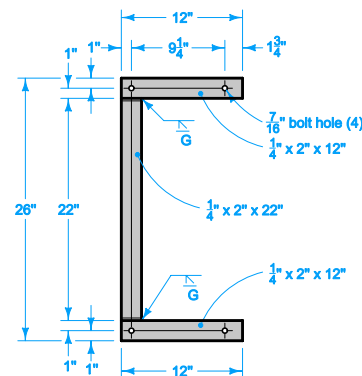

OFFSET BRACKET


Fabricate object markers from materials complying with Section 4186 of the Standard Specifications.

Buttons on Type 1 Object Markers may consist of yellow reflectors or yellow reflective sheeting. Do not mix types on any single object marker. When reflectors are used, attach to sign blank with an aluminum, brazier head, blind rivet of $\frac{3}{16}$ inch diameter and a grip range of $\frac{1}{8}$ to $\frac{3}{8}$ inches.


Install object markers truly vertical.

Ensure top of post does not extend above top of object marker.

 Iowa Department of Transportation	REVISION
	New 04-20-10
STANDARD ROAD PLAN	SI-173
REVISIONS: New.	SHEET 1 of 2
APPROVED BY DESIGN METHODS ENGINEER <i>Deanna Maiford</i>	
OBJECT MARKERS	

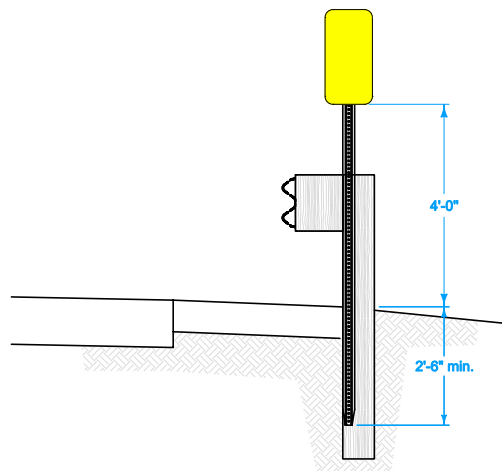


TYPE 2

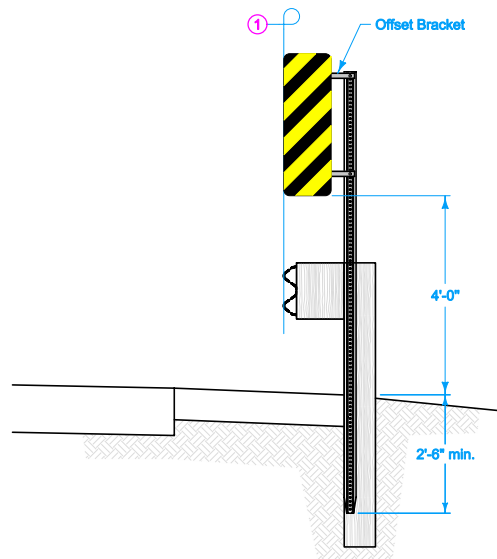


TYPE 3

INSTALLATION AT GUARDRAIL LOCATIONS

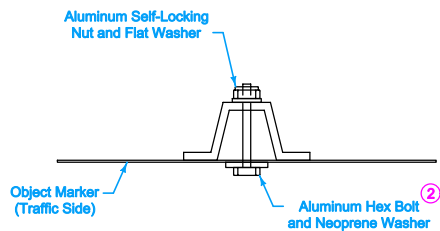

STANDARD ATTACHMENT

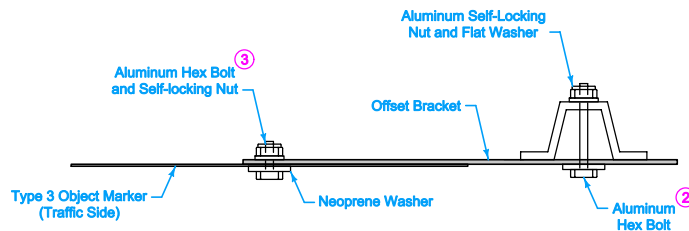

OFFSET BRACKET ATTACHMENT

- ① Install Type 3 Object Markers so the inside edge of the marker is in line with the inner edge of the obstruction.
- ② Attach object marker or offset bracket to the delineator post at two locations. Use the following per bolt hole location:
 - one aluminum $\frac{5}{16}$ in. dia x $2\frac{1}{4}$ in. length hex head bolt with matching self-locking nut,
 - one aluminum flat washer of 0.344 in. ID x 0.688 in. OD x 0.091 thickness behind the nut, and
 - for object marker attachment only, one neoprene washer of 1 in. OD x $\frac{1}{8}$ in. thickness behind the bolt head.
- ③ When Type 3 Object Marker is installed on an offset bracket, attach marker to bracket at two locations. Use the following per bolt hole location:
 - one aluminum $\frac{5}{16}$ in. dia x $1\frac{1}{2}$ in. length hex head bolt with matching self-locking nut,
 - one aluminum flat washer of 0.344 in. ID x 0.688 in. OD x 0.091 thickness behind the nut, and
 - one neoprene washer of 1 in. OD x $\frac{1}{8}$ in. thickness behind the bolt head.

 Iowa Department of Transportation	REVISION	
	New	04-20-10
STANDARD ROAD PLAN	SI-173	
SHEET 2 of 2		
REVISIONS: New.		
<i>Deanna Maiford</i> APPROVED BY DESIGN METHODS ENGINEER		
OBJECT MARKERS		