
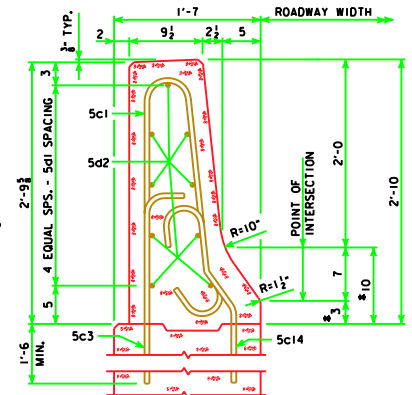


TABLE OF BARRIER RAIL DIMENSIONS AND NUMBERS


E-CE ABUT. BRG		138'-10				151'-4				163'-10				176'-4				E-CE ABUT. BRG	
SKEW		0°	15°	30°	45°	0°	15°	30°	45°	0°	15°	30°	45°	0°	15°	30°	45°	SKEW	
DIMENSION OR NUMBER	L (FT.-IN.)	155'-10	155'-11½	156'-3¼	157'-0½	168'-4	168'-5½	168'-9¾	169'-6¼	180'-10	180'-11½	181'-3¾	182'-0½	193'-4	193'-5½	193'-9¾	194'-6¼	L (FT.-IN.)	
	B (FT.-IN.)	141'-10	141'-11½	142'-3¼	143'-0½	154'-4	154'-5½	154'-9¾	155'-6¼	166'-10	166'-11½	167'-3¾	168'-0½	179'-4	179'-5½	179'-9¾	180'-6¼	B (FT.-IN.)	
	S (FT.-IN.)	141'-10	141'-11½	142'-3¼	143'-0½	154'-4	154'-5½	154'-9¾	155'-6¼	166'-10	166'-11½	167'-3¾	168'-0½	179'-4	179'-5½	179'-9¾	180'-6¼	S (FT.-IN.)	
	C	133	133	133	133	145	145	145	145	158	158	158	158	170	170	170	170	C	
	D (FT.-IN.)	133'-0	133'-0	133'-0	133'-0	145'-0	145'-0	145'-0	145'-0	158'-0	158'-0	158'-0	158'-0	170'-0	170'-0	170'-0	170'-0	D (FT.-IN.)	
	E	134	134	134	134	146	146	146	146	159	159	159	159	171	171	171	171	E	
	F (FT.-IN.)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	F (FT.-IN.)	
	W (FT.-IN.)	3'-11	3'-11½	4'-1½	4'-6½	4'-2	4'-2½	4'-4½	4'-9½	3'-11	3'-11½	4'-1½	4'-6½	4'-2	4'-2½	4'-4½	4'-9½	W (FT.-IN.)	
α	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	α		

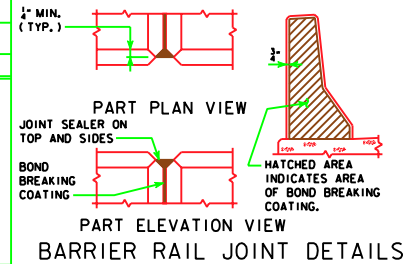

* DENOTES THE MAXIMUM VALUE FOR THIS DIMENSION. THIS DIMENSION MAY VARY DUE TO CONSTRUCTION INACCURACIES.

TABLE OF BARRIER RAIL DIMENSIONS AND NUMBERS

E-CE ABUT. BRG		188'-10				201'-4				213'-10				226'-4				243'-0				E-CE ABUT. BRG	
SKEW		0°	15°	30°	45°	0°	15°	30°	45°	0°	15°	30°	45°	0°	15°	30°	45°	0°	15°	30°	45°	SKEW	
DIMENSION OR NUMBER	L (FT.-IN.)	205'-10	205'-11½	206'-3½	207'-0½	228'-4	228'-4	228'-4	228'-4	240'-10	240'-10	240'-10	240'-10	253'-4	253'-4	253'-4	253'-4	270'-0	270'-0	270'-0	270'-0	L (FT.-IN.)	DIMENSION OR NUMBER
	B (FT.-IN.)	191'-10	191'-11½	192'-3½	193'-0½	214'-4	214'-4	214'-4	214'-4	226'-10	226'-10	226'-10	226'-10	239'-4	239'-4	239'-4	239'-4	256'-0	256'-0	256'-0	256'-0	B (FT.-IN.)	
	S (FT.-IN.)	191'-10	191'-11	192'-3½	193'-0½	204'-4	204'-4½	204'-9	205'-6½	216'-10	216'-11	217'-3½	218'-0½	229'-4	229'-5½	229'-9½	230'-6½	246'-0	246'-1½	246'-5½	247'-2½	S (FT.-IN.)	
	C	183	183	183	183	195	195	195	195	208	208	208	208	220	220	220	220	237	237	237	237	C	
	D (FT.-IN.)	183'-0	183'-0	183'-0	183'-0	195'-0	195'-0	195'-0	195'-0	208'-0	208'-0	208'-0	208'-0	220'-0	220'-0	220'-0	220'-0	237'-0	237'-0	237'-0	237'-0	D (FT.-IN.)	
	E	184	184	184	184	196	196	196	196	209	209	209	209	221	221	221	221	238	238	238	238	E	
	F (FT.-IN.)	0	0	0	0	5'-0	4'-11½	4'-9½	4'-4½	5'-0	4'-11½	4'-9½	4'-4½	5'-0	4'-11½	4'-9½	4'-4½	5'-0	4'-11½	4'-9½	4'-4½	F (FT.-IN.)	
	W (FT.-IN.)	3'-11	3'-11½	4'-1½	4'-6½	4'-2	4'-2½	4'-4½	4'-9½	3'-11	3'-11½	4'-1½	4'-6½	4'-2	4'-2½	4'-4½	4'-9½	4'-0½	4'-0½	4'-2½	4'-7½	W (FT.-IN.)	
α		0	0	0	0	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	α	

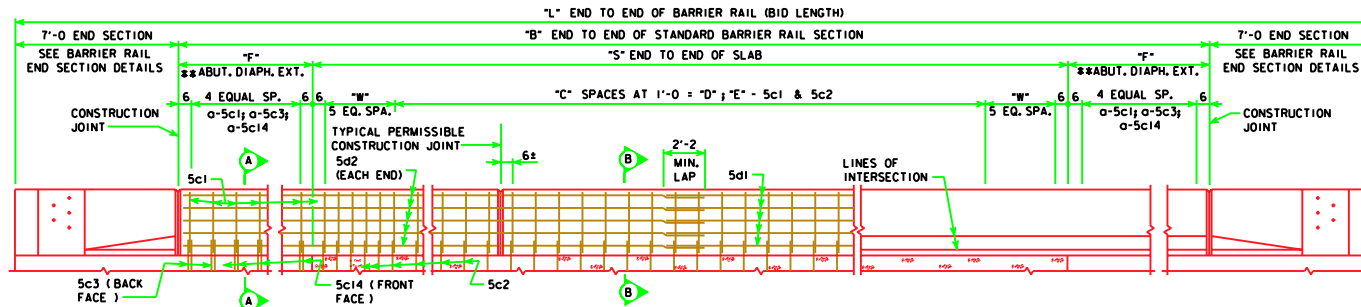

BARRIER RAIL NOTES:

MINIMUM CLEAR DISTANCE FROM FACE OF CONCRETE TO NEAR REINFORCING BAR IS TO BE 2" UNLESS OTHERWISE NOTED OR SHOWN.

THE PERMISSIBLE CONSTRUCTION JOINTS ARE TO BE PLACED BETWEEN VERTICAL BARS AT A MINIMUM SPACING OF 20 FEET. CONSTRUCTION JOINT CONTACT SURFACES ARE TO BE COATED WITH AN APPROVED BOND BREAKER.

COST OF THE JOINT SEALER AND BOND BREAKER SHALL BE CONSIDERED INCIDENTAL TO OTHER CONSTRUCTION.

THE CONCRETE BARRIER RAIL IS TO BE BID ON A LINEAL FOOT BASIS. THE NUMBER OF LINEAL FEET OF BARRIER RAIL INSTALLED WILL BE PAID FOR AT THE CONTRACT PRICE PER LINEAL FOOT BASED ON PLAN QUANTITIES. PRICE BID FOR CONCRETE BARRIER RAILING SHALL BE FULL COMPENSATION FOR FURNISHING ALL MATERIAL, EXCLUDING REINFORCING STEEL, AND ALL OF THE EQUIPMENT AND LABOR REQUIRED TO ERECT THE RAIL IN ACCORDANCE WITH THESE PLANS AND CURRENT SPECIFICATIONS.

IF CONDUIT IS REQUIRED IN THIS PLAN THE RIGID STEEL CONDUIT, JUNCTION BOXES AND FITTINGS INCLUDING LABOR AND ANY ADDITIONAL WORK TO DO THE INSTALLATION IS CONSIDERED INCIDENTAL TO THE COST OF THE RAILING.

ALL BARRIER RAIL REINFORCING STEEL IS TO BE INCLUDED WITH THE SUPERSTRUCTURE REINFORCING STEEL.


THE JOINT SEALER SHALL BE LIGHT GRAY NONSAG LATEX CAULKING SEALER MARKETING FOR OUTDOOR USE. NO TESTING OR CERTIFICATION IS REQUIRED.

TOP OF THE BARRIER RAIL IS TO BE PARALLEL TO THE THEORETICAL E GRADE.

CROSS SECTIONAL AREA OF THE STANDARD SECTION OF THE BARRIER RAIL = 2.84 SQUARE FEET.

CONCRETE BARRIER RAILS PLACED USING THE SLIPFORM METHOD WILL REQUIRE THE USE OF A CLASS BR CONCRETE IN ACCORDANCE WITH ARTICLE 2513.03B OF THE STANDARD SPECIFICATION. CAST-IN-PLACE BARRIER RAILS SHALL USE CLASS C MIX. CLASS D CONCRETE IS NOT PERMITTED FOR CONCRETE BARRIER RAILS (CAST-IN-PLACE OR SLIPFORM METHOD).

** APPLIES TO 201'-4, 213'-10, 226'-4 & 243'-0 BRIDGES ONLY.

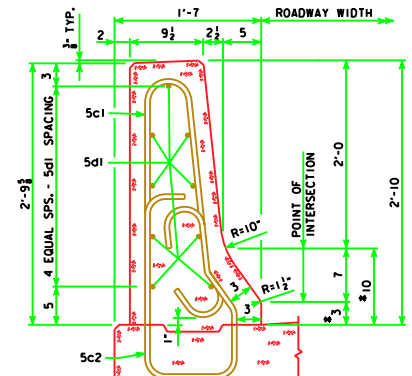

PART SECTION B-B

LATEST REVISION DATE	 APPROVED BY BRIDGE ENGINEER		STANDARD DESIGN - 30' ROADWAY, THREE SPAN BRIDGES
			PRETENSIONED PRESTRESSED CONCRETE BEAM BRIDGES
			HL93 SUPERSTRUCTURE DECEMBER, 2006 HS25 SUBSTRUCTURE
			BARRIER RAIL DETAILS SHEET 1 OF 3
		H30-39-06	