



**TYPICAL SECTION**

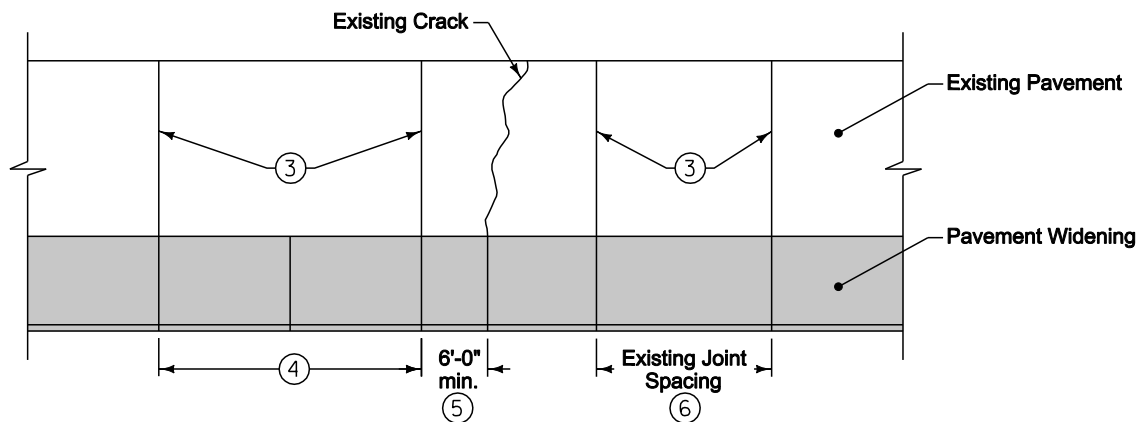

**TYPICAL JOINT LAYOUT**

- ① Match existing pavement thickness or as specified in the contract documents.
- ② Subgrade or subbase material as specified.
- ③ Existing C or CD joint.
- ④ Where existing joint spacing exceeds 20 feet, place joint at half way point.
- ⑤ If placing a joint at an existing crack results in a panel less than 6 feet long, do not place joint.
- ⑥ Match all existing expansion joints. Match existing C or CD joints where possible.

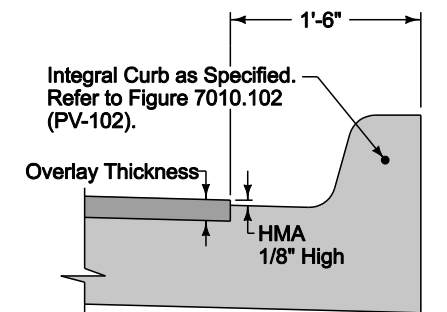

**DETAIL A**  
(Curb for Widening with HMA Overlay)

	REVISION	
	New	10-19-10
	7010.902	
	SHEET 1 of 1	

**SUDAS Standard Specifications**

**PCC PAVEMENT WIDENING**