




'B' 5
PLAIN JOINT
(Abutting Pavement Slabs)

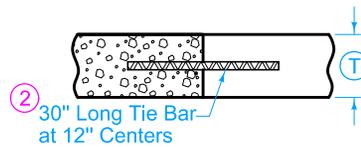


'DW' 3 4 7
DAY'S WORK JOINT (Non-working)

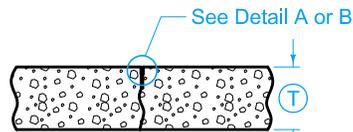


'C' 6
CONTRACTION JOINT

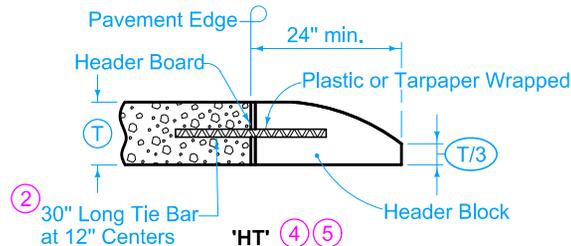


'HT' 4 5
HEADER JOINT
(End Rigid Pavement)

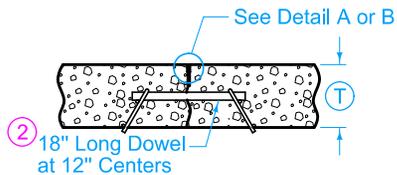


'CD' 1 4 6
DOWELED CONTRACTION JOINT

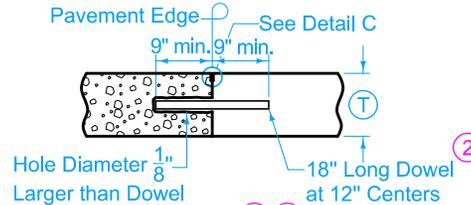

'RD' 4 5
ABUTTING PAVEMENT JOINT

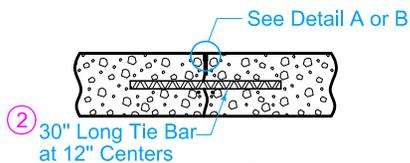


'CT' 4
TIED CONTRACTION JOINT

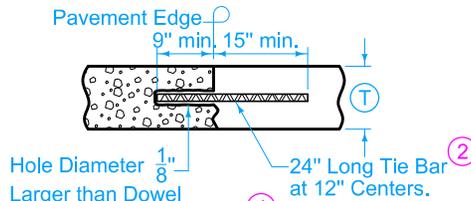


'RT' 4
ABUTTING PAVEMENT JOINT
RIGID TIE

- 1 See dowel assemblies for fabrication details.
- 2 See Bar Size Table.
- 3 Locate 'DW' joint at a mid-panel location between future 'C' or 'CD' joints. Place no closer than 5 feet to a 'C' or 'CD' joint.
- 4 Place bars within the limits shown under dowel assemblies.
- 5 Edge with 1/4 inch tool for length of joint indicated if formed; edging not required when cut with diamond blade saw. Remove header block and board when second slab is placed.
- 6 Unless otherwise specified, use 'CD' transverse contraction joints in mainline pavement when T is greater or equal to 8 inches. Use 'C' joints when T is less than 8 inches.
- 7 'RT' joint may be used in lieu of 'DW' joint at the end of the days work. Remove any pavement damaged due to the drilling at no additional cost to the Contracting Authority.

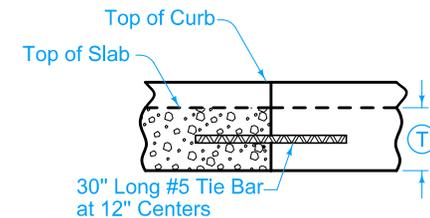


'DW - CG' 3 4
DAY'S WORK JOINT
CURB AND GUTTER UNIT

SUDAS	Iowa Department of Transportation	REVISION
		3 04-15-14
FIGURE 7010.101	STANDARD ROAD PLAN	PV-101
		SHEET 1 of 8
REVISIONS: Added "Days Work Joint Curb and Gutter Unit" to page 1.		
<i>Paul D. Wigand</i> SUDAS DIRECTOR		<i>Brian Smith</i> DESIGN METHODS ENGINEER

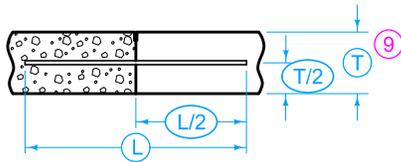

BAR PLACEMENT


(Applies to all joints unless otherwise detailed.)

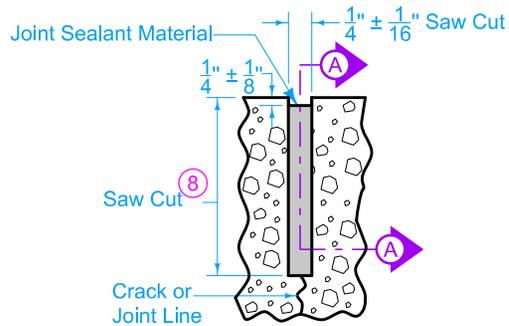

DETAIL A


(Saw cut formed by conventional concrete sawing equipment.)

- ⑧ Saw 'CD' joint to a depth of $T/3 \pm 1/4"$; saw 'C' joint to a depth of $T/4 \pm 1/4"$.
- ⑨ When tying into old pavement, **T** represents the depth of sound PCC.

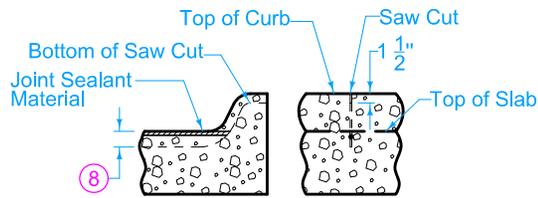

'C' JOINT IN CURB


(Match 'CT', 'CD', or 'C' joint in pavement.)

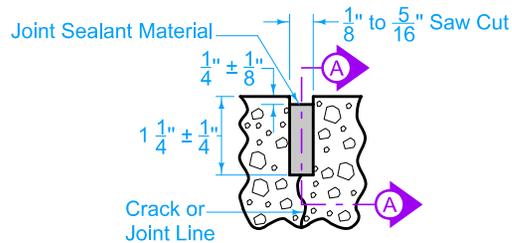

DETAIL B


(Saw cut formed by approved early concrete sawing equipment.)

BAR SIZE TABLE		
T	Dowel Diameter	Tie Bar Size
< 8"	3/4"	#6
≥ 8" but < 10"	1 1/4"	#10
≥ 10"	1 1/2"	#11

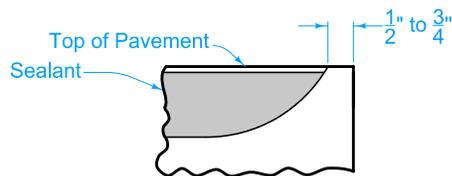

SECTION A-A


(Detail at Edge of Pavement)

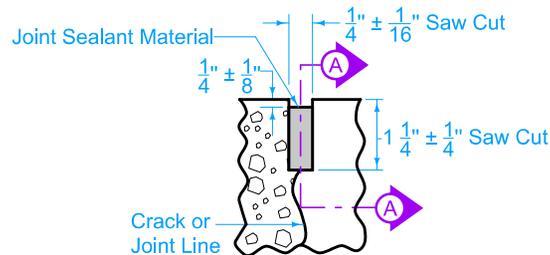


DETAIL C

TRANSVERSE CONTRACTION

		REVISION
		3 04-15-14
FIGURE 7010.101	STANDARD ROAD PLAN	PV-101
		SHEET 2 of 8
<small>REVISIONS: Added "Days Work Joint Curb and Gutter Unit" to page 1.</small>		
<i>Paul D. Wigand</i> <small>SUDAS DIRECTOR</small>		<i>Brian Smith</i> <small>DESIGN METHODS ENGINEER</small>
<p>JOINTS</p>		




'B'
PLAIN JOINT
(Abutting Pavement Slabs)




'BT'
ABUTTING PAVEMENT JOINT - RIGID TIE

Ⓣ	Joint	Bars	Bar Length and Spacing
< 8"	'BT-1'	#4	36" Long at 30" Centers
≥ 8"	'BT-2'	#5	36" Long at 30" Centers

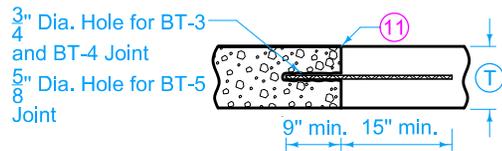


'BT'
ABUTTING PAVEMENT JOINT - RIGID TIE (Drilled)


Ⓣ	Joint	Bars	Bar Length and Spacing
< 8"	'BT-5'	#4	24" Long at 30" Centers
≥ 8"	'BT-3'	#5	24" Long at 30" Centers
	'BT-4'		24" Long at 15" Centers

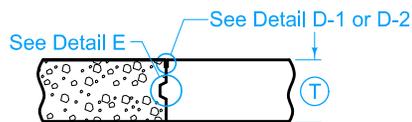


'K'
KEYED JOINT FOR ADJACENT SLABS
(Where T is 8" or more)

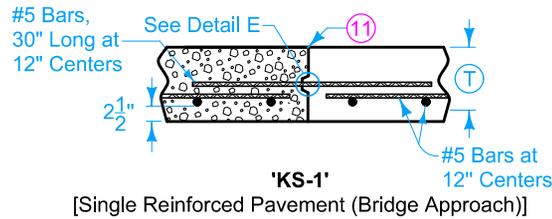

'KS-1'
[Single Reinforced Pavement (Bridge Approach)]

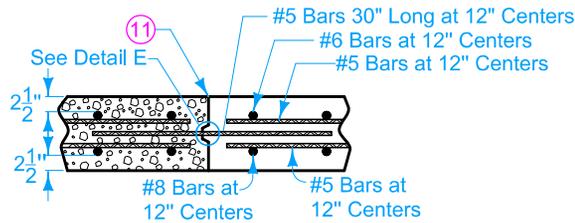

'KS-2'
[Double Reinforced Pavement (Bridge Approach)]




'KT'
ABUTTING PAVEMENT JOINT - KEYWAY TIE

Ⓣ	Joint	Bars	Bar Length and Spacing
< 8"	'KT-1'	#4	30" Long at 30" Centers
≥ 8"	'KT-2'	#5	30" Long at 30" Centers
	'KT-3'		30" Long at 15" Centers

LONGITUDINAL CONTRACTION

- Ⓣ Bar supports may be necessary for fixed form paving to ensure the bar remains in a horizontal position in the plastic concrete.
- 11 Sawing or sealing of joint not required.
- 12 The following joints are interchangeable, subject to the pouring sequence:
'BT-1', 'L-1', and 'KT-1'
'KT-2' and 'L-2'
'KT-3' and 'L-3'

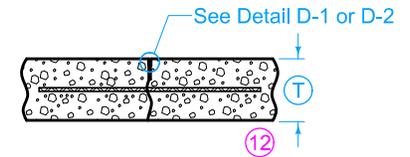


'L'
CONTRACTION JOINT

Ⓣ	Joint	Bars	Bar Length and Spacing
< 8"	'L-1'	#4	36" Long at 30" Centers
≥ 8"	'L-2'	#5	36" Long at 30" Centers
	'L-3'		36" Long at 15" Centers


FIGURE 7010.101 SHEET 3 OF 8

		REVISION	
		3	04-15-14
FIGURE 7010.101	STANDARD ROAD PLAN	PV-101	
		SHEET 3 of 8	
REVISIONS: Added "Days Work Joint Curb and Gutter Unit" to page 1.			
 SUDAS DIRECTOR		 DESIGN METHODS ENGINEER	

JOINTS

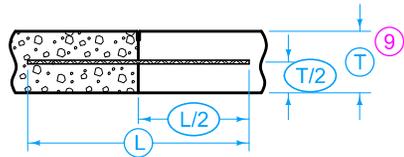


TIE BAR PLACEMENT
(Applies to all joints unless otherwise detailed.)




DETAIL E

KEYWAY DIMENSIONS			
Keyway Type	Pavement Thickness T	A	B
Standard	8" or greater	$1\frac{3}{4}$ "	$2\frac{3}{4}$ "
Narrow	Less than 8"	1"	2"

- 9 When tying into old pavement, T represents the depth of sound PCC.
- 13 Sealant or cleaning not required.

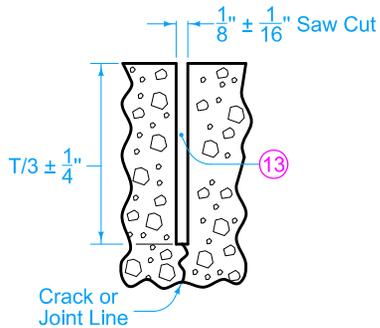


DETAIL D-1
(Required when the Department of Transportation is the Contracting Authority, or when specified in the contract documents.)

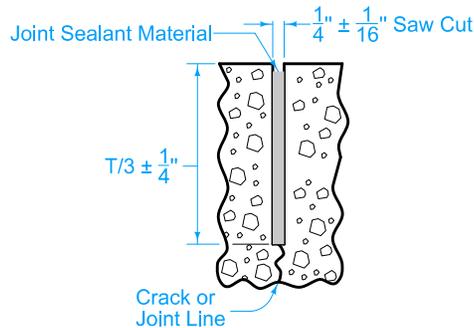


DETAIL D-2
(Required when the Department of Transportation is not the Contracting Authority, or when specified in the contract documents)

LONGITUDINAL CONTRACTION


		REVISION
		3 04-15-14
FIGURE 7010.101	STANDARD ROAD PLAN	PV-101
		SHEET 4 of 8
REVISIONS: Added "Days Work Joint Curb and Gutter Unit" to page 1.		
SUDAS DIRECTOR		DESIGN METHODS ENGINEER
JOINTS		

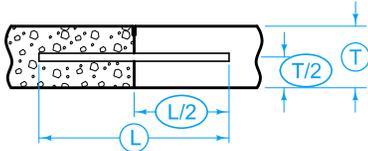


DOWEL PLACEMENT
(Applies to all joints unless otherwise detailed.)

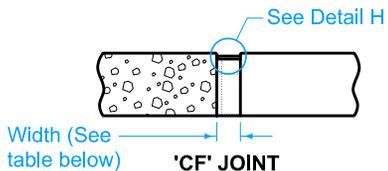


TYPE	WIDTH
CF-1	2"
CF-2	2 1/2"
CF-3	3"
CF-4	3 1/2"




'E'
1" EXPANSION JOINT

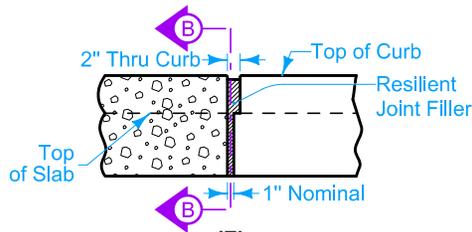


'E'
JOINT IN CURB
(View at Back of Curb)

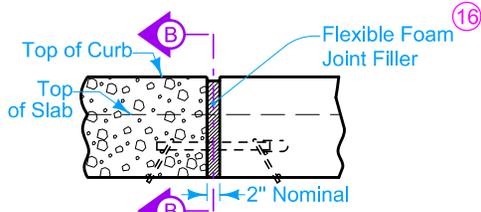


'EE'
JOINT IN CURB
(View at Back of Curb)

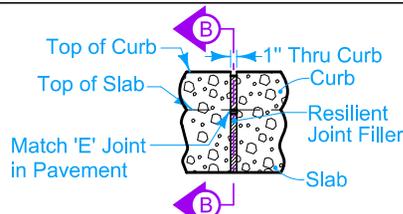


'ES'
JOINT IN CURB
(View at Back of Curb)

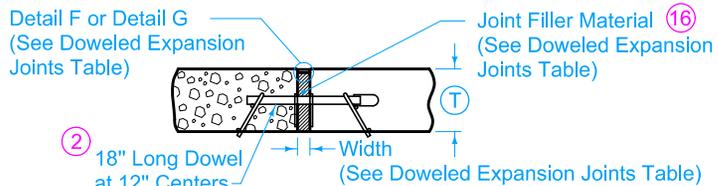


'ED', 'EE', 'EF'
DOWELED EXPANSION JOINT




SECTION B-B



DETAIL F

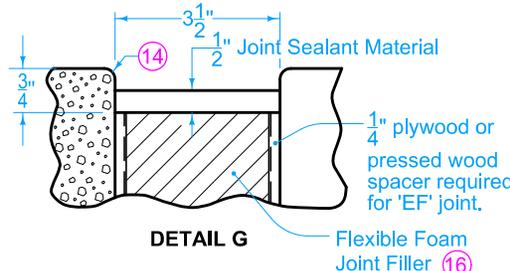

DETAIL G

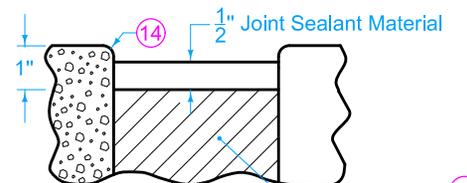

DETAIL H

EXPANSION

- ② See Bar Size Table.
- ⑭ Edge with 1/4 inch tool for length of joint indicated if formed; edging not required when cut with diamond blade saw.
- ⑮ See Dowel Assemblies for fabrication details and placement limits. Coat the free end of dowel bar to prevent bond with pavement. At intake locations, dowel bars may be cast-in-place.
- ⑯ Predrill or preform holes in joint material for appropriate dowel size.
- ⑰ Compact tire buffings by spading with a square-nose shovel.

DOWELED EXPANSION JOINTS		
TYPE	WIDTH	FILLER MATERIAL ⑯
ED	1"	Resilient (Detail F)
EE	2"	Flexible Foam (Detail F)
EF	3 1/2"	Flexible Foam (Detail G)

BAR SIZE TABLE			
T	< 8"	≥ 8" but < 10"	≥ 10"
Dowel Diameter	3/4	1 1/4	1 1/2




		REVISION	
		3	04-15-14
FIGURE 7010.101	STANDARD ROAD PLAN	PV-101	
		SHEET 5 of 8	

REVISIONS: Added "Days Work Joint Curb and Gutter Unit" to page 1.

Paul D. Wiggand Brian Smith
SUDAS DIRECTOR DESIGN METHODS ENGINEER

JOINTS

CONTRACTION JOINTS

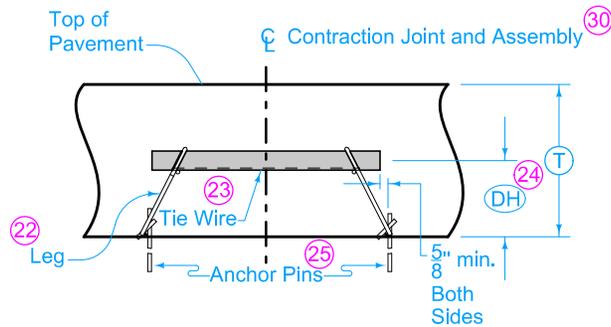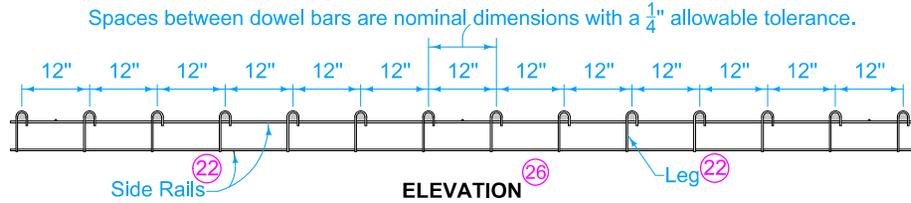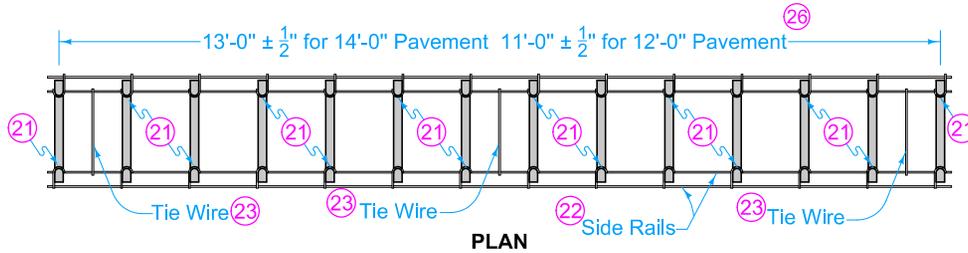

LONGITUDINAL SECTION

DOWEL ASSEMBLIES



(18)(19)(20)

DOWEL HEIGHT AND DIAMETER		
(T)	(DH) (24)	Diameter
7" to 7 $\frac{1}{2}$ "	3 $\frac{1}{2}$ "	$\frac{3}{4}$ "
8" to 9 $\frac{1}{2}$ "	4 $\frac{1}{4}$ "	1 $\frac{1}{4}$ "
10" to 11 $\frac{1}{2}$ "	5 $\frac{1}{4}$ "	1 $\frac{1}{2}$ "
12" to 13"	6 $\frac{1}{4}$ "	1 $\frac{1}{2}$ "

- (18) Use 18 inch long dowel bars with a tolerance of $\pm 1/8$ inch. Ensure the centerlines of individual dowels are parallel to the other dowels in the assembly within $\pm 1/8$ inch.
- (19) Wire sizes shown are the minimum required. Use wires with a minimum tensile strength of 50 ksi.
- (20) Details apply to both transverse contraction and expansion joints.
- (21) Weld alternately throughout.
- (22) #1/0 gauge (0.306 inch diameter) wire.
- (23) #10 gauge (0.135 inch diameter) wire, welded or friction fit to upper side rail, both sides.
- (24) Measured from the centerline of dowel bar to bottom of lower side rail + 1/4 inch.
- (25) Per lane width, install a minimum of 8 anchor pins evenly spaced (4 per side), to prevent movement of assembly during construction. Anchor assemblies placed on pavement or PCC base with devices approved by the Engineer.
- (26) If dowel basket assemblies are required for curbed pavements, the assembly length is based on the jointing layout. See PV-101, sheet 8.
- (30) Ensure dowel basket assembly centerline is within 2 inches of the intended joint location longitudinally and has no more than 1/4 inch horizontal skew from end of basket to end of basket.

		REVISION
		3 04-15-14
FIGURE 7010.101	STANDARD ROAD PLAN	PV-101
		SHEET 6 of 8
REVISIONS: Added "Days Work Joint Curb and Gutter Unit" to page 1.		
Paul D. Wigand SUDAS DIRECTOR		Brian Smith DESIGN METHODS ENGINEER
JOINTS		

EXPANSION JOINTS

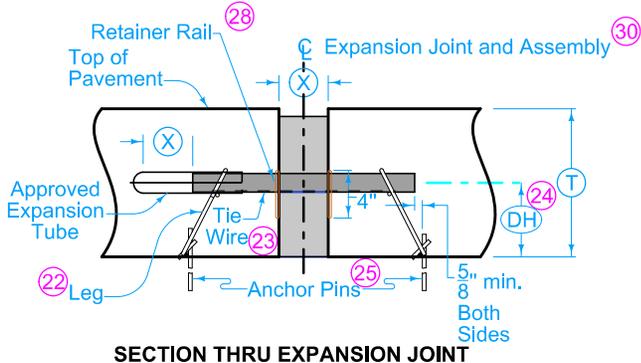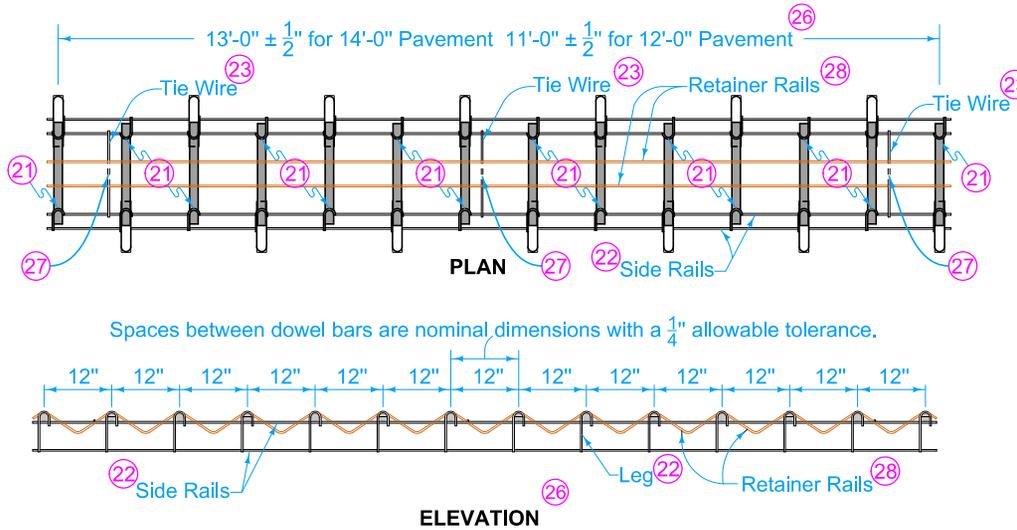

DOWEL HEIGHT AND DIAMETER		
T	DH (24)	Diameter
7" to 7 $\frac{1}{2}$ "	3 $\frac{1}{2}$ "	$\frac{3}{4}$ "
8" to 9 $\frac{1}{2}$ "	4 $\frac{1}{4}$ "	$\frac{1}{4}$ "
10" to 11 $\frac{1}{2}$ "	5 $\frac{1}{4}$ "	$\frac{1}{2}$ "
12" to 13"	6 $\frac{1}{4}$ "	$\frac{1}{2}$ "

JOINT OPENING AND EXPANSION TUBE EXTENSION		
Joint Type	X	Minimum Tube Length
"ED"	1"	6"
"EE"	2"	7"
"EF"	3 $\frac{1}{2}$ "	9"


DOWEL ASSEMBLIES

(18) (19) (20)


- (18) Use 18 inch long dowel bars with a tolerance of $\pm 1/8$ inch. Ensure the centerlines of individual dowels are parallel to the other dowels in the assembly within $\pm 1/8$ inch.
- (19) Wire sizes shown are the minimum required. Use wires with a minimum tensile strength of 50 ksi.
- (20) Details apply to both transverse contraction and expansion joints.
- (21) Weld alternately throughout.
- (22) #1/0 gauge (0.306 inch diameter) wire.
- (23) #10 gauge (0.135 inch diameter) wire, welded or friction fit to upper side rail, both sides.
- (24) Measured from the centerline of dowel bar to bottom of lower side rail + 1/4 inch.
- (25) Per lane width, install a minimum of 8 anchor pins evenly spaced (4 per side), to prevent movement of assembly during construction. Anchor assemblies placed on pavement or PCC base with devices approved by the Engineer.
- (26) If dowel basket assemblies are required for curbed pavements, the assembly length is based on the jointing layout. See PV-101, sheet 8.
- (27) Clip and remove center portion of tie during field assembly.
- (28) 1/4 inch diameter wire.
- (30) Ensure dowel basket assembly centerline is within 2 inches of the intended joint location longitudinally and has no more than 1/4 inch horizontal skew from end of basket to end of basket.

FIGURE 7010.101 SHEET 7 OF 8

		REVISION
		3 04-15-14
FIGURE 7010.101	STANDARD ROAD PLAN	PV-101
		SHEET 7 of 8
<small>REVISIONS: Added "Days Work Joint Curb and Gutter Unit" to page 1.</small>		
<small>SUDAS DIRECTOR</small>		<small>DESIGN METHODS ENGINEER</small>
<p>JOINTS</p>		

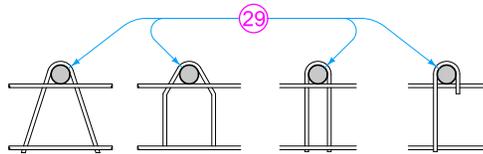


OPTIONAL LEG SHAPES

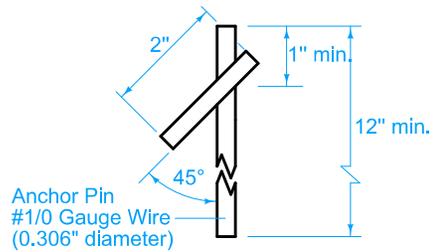


ANCHOR PIN


- 18 Use 18 inch long dowel bars with a tolerance of $\pm 1/8$ inch. Ensure the centerlines of individual dowels are parallel to the other dowels in the assembly within $\pm 1/8$ inch.
- 19 Wire sizes shown are the minimum required. Use wires with a minimum tensile strength of 50 ksi.
- 20 Details apply to both transverse contraction and expansion joints.
- 29 Diameter of bend around dowel is dowel diameter + $1/8$ to $3/16$ inches.
- 31 For uniform lane widths: 3" - 6". For taper and variable width pavements: 3" - 12".

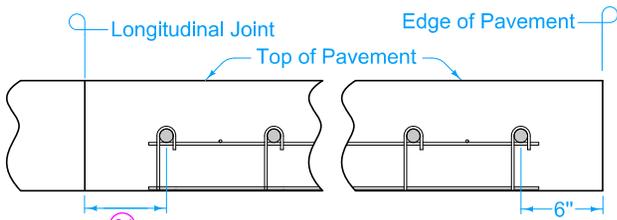


**PLACEMENT LIMITS
(Rural Section)**

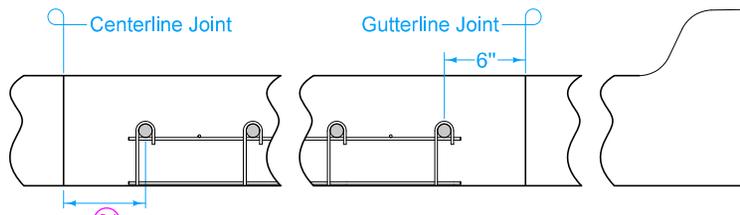

**PLACEMENT LIMITS
(Curb and Gutter - Gutterline Jointing)**



BEND AROUND DOWEL

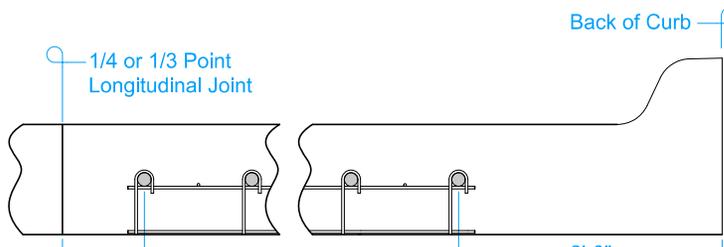

**PLACEMENT LIMITS
(Curb and Gutter - 1/4 or 1/3 Point Jointing)**

DOWEL ASSEMBLIES

18 19 20

		REVISION
		3 04-15-14
FIGURE 7010.101	STANDARD ROAD PLAN	PV-101
		SHEET 8 of 8
REVISIONS: Added "Days Work Joint Curb and Gutter Unit" to page 1.		
<i>Paul D. Wigand</i> SUDAS DIRECTOR		<i>Brian Smith</i> DESIGN METHODS ENGINEER
JOINTS		