



TYPE A-1 CLEANOUT

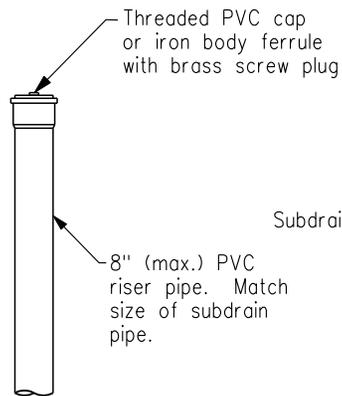


TYPE A-2 CLEANOUT  
(Non-traffic areas only)

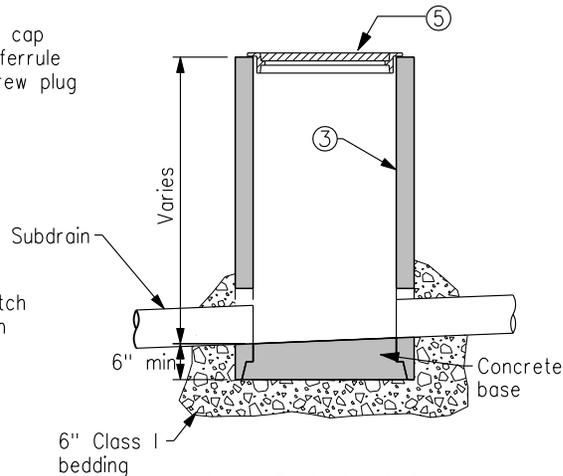


TYPE B CLEANOUT  
(Non-traffic areas only)

- ① Heavy duty casting. Mark lid with "Storm" or "Storm C.O."
- ② Do not allow casting to bear on top of riser pipe; provide 2 inch clearance, minimum.
- ③ 24 inch diameter RCP for subdrain 8 inches or smaller; 30 inch diameter RCP for 10 to 12 inch subdrain. A manufactured cleanout may be used in lieu of a Type B cleanout, if approved by the Engineer.
- ④ Design is intended for use in conjunction with 8 inch PVC riser pipe. Other sized caps may be used with smaller pipe, as approved by the Engineer.
- ⑤ Provide Type G casting, as required to fit pipe size.

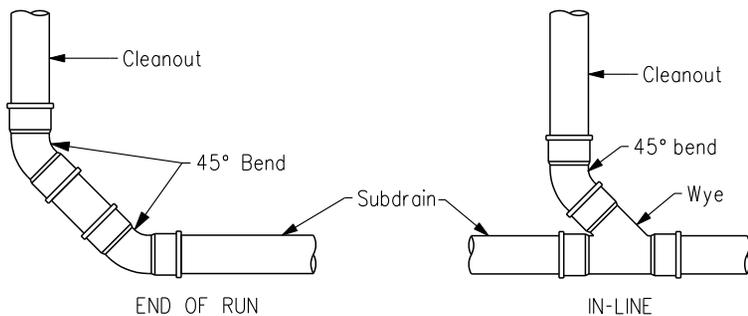

TYPE A CLEANOUT CONNECTIONS

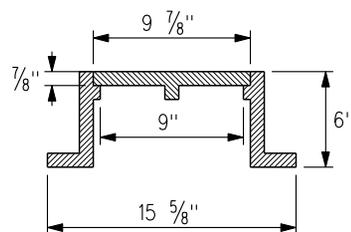

DETAIL A ①④

(Dimensions are nominal)

	REVISION	
	NEW	10/21/08
	<b>FIGURE 4040.232</b>	
SHEET 1 OF 1		
<b>SUBDRAIN CLEANOUTS</b>		