

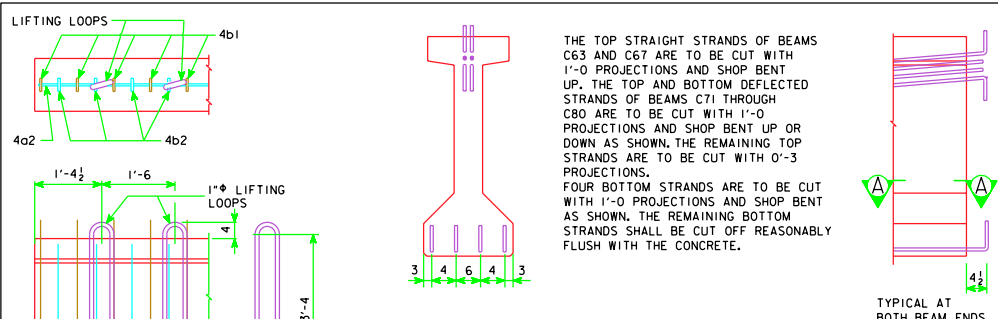



REVISED 11-09 - THE SPECIFICATION REFERENCES WERE CHANGED. THE BEAM DETAILS WERE UPDATED TO THE CURRENT BEAM DETAILS.

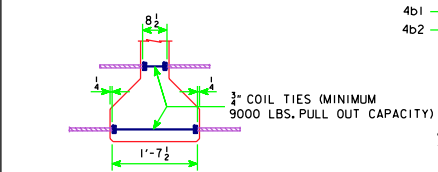

STRAND PROJECTION AT BEAM ENDS WHEN EMBEDDED IN CONCRETE END DIAPHRAGMS




COIL TIE DETAIL
NUMBER AND EXACT LOCATION OF COIL TIES TO BE AS DETAILED ON SPECIFIC BRIDGE DESIGN.

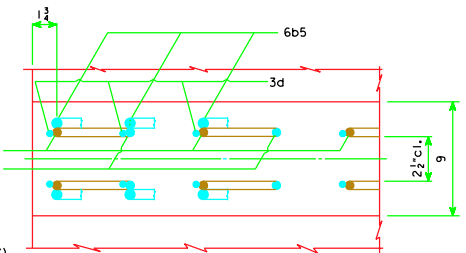

SECTION A-A SHOWING PLACEMENT OF STIRRUPS NEAR END OF BEAM

** WHERE DEFLECTING STRANDS INTERFERE WITH PLACEMENT, SOME IN-PLACE BENDING MAY BE NECESSARY.
ΔΔ 4b1 BARS TO BE EPOXY COATED.

REINFORCING BAR LIST						
BEAM	C63	C67	C71	C75	C80	
SPAN	63'-4	67'-6	71'-8	75'-10	80'-0	
BAR SHAPE	NO.	LENGTH	NO.	LENGTH	NO.	LENGTH
6a1	—	—	4	37'-8	4	41'-10
4a2	2	5'-0	2	5'-0	2	5'-0
8a3	—	—	—	—	2	40'-0
ΔΔ 4b1	46	8'-10	48	8'-10	54	8'-10
4b2	12	7'-2	12	7'-2	12	7'-2
6b5	4	3'-9	8	3'-9	8	3'-9
3c1	46	1'-8	48	1'-8	54	1'-8
** 3d	116	3'-0	120	3'-0	132	3'-0
3e	26	1'-10	26	1'-10	26	1'-10

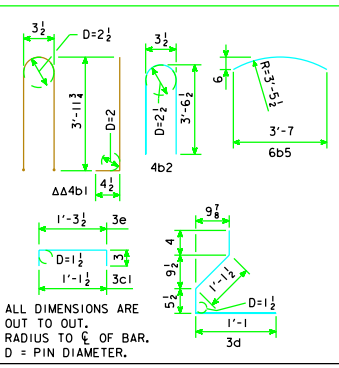

C BEAM DATA																		
BEAM	SPAN LENGTH ℓ _s -ℓ _b BEARING	OVERALL BEAM LENGTH (L)	STRAND SIZE DIA. (inches)	NO. OF STRANDS	DEFLECTED	TOTAL INITIAL PRESTRESS KIPS	③ HOLD DOWN FORCE-KIPS	CAMBER (in.)		DEFLECTION (in.) Δ ₀				PERMISSIBLE SPACING		WEIGHT (TONS)	CONCRETE (C. Y.)	REINFORCING STEEL(KID)
								AT RELEASE	AFTER LOSSES	IMMEDIATE① (ELASTIC) Δ ₁		TIME (PLASTIC) Δ _T						
										CONC. DIAPH.	STEEL DIAPH.	CONC. DIAPH.	STEEL DIAPH.					
														HL93 LOADING	CONC. STEEL DIAPH. DIAPH.			
C63	63'-4	64'-4	0.60	16	—	681	—	0.70	1.24	0.59	0.54	0.15	0.14	7'-6	7'-6	18.9	9.34	536
C67	67'-6	68'-6	0.60	18	—	766	—	0.92	1.62	0.76	0.71	0.19	0.18	7'-6	7'-6	20.1	9.95	576
*C71	71'-8	72'-8	0.60	14	4	766	16	1.21	2.13	0.88	0.82	0.22	0.20	7'-6	7'-6	21.4	10.55	855
*C75	75'-10	76'-10	0.60	14	6	851	22	1.33	2.34	1.07	0.99	0.27	0.25	7'-6	7'-6	22.6	11.16	925
*C80	80'-0	81'-0	0.60	16	6	937	21	1.64	2.90	1.31	1.24	0.33	0.31	7'-6	7'-6	23.8	11.76	1191

- ① DEFLECTIONS AT MID-SPAN DUE TO WEIGHT OF SLAB AND DIAPHRAGM. THE DEFLECTIONS SHOWN ARE FOR A SLAB WEIGHT OF 757 #/FT. (8" SLAB AND 7'-6 BEAM SPACING) AND ONE CONCRETE DIAPHRAGM (2635 #) OR ONE STEEL DIAPHRAGM (285 #) AT ℓ_s OF SPAN. FOR DIFFERENT SLAB AND DIAPHRAGM WEIGHTS, DEFLECTIONS WILL BE DIRECTLY PROPORTIONAL.
- ② DEFLECTIONS DUE TO THE COMBINED EFFECT OF CREEP DUE TO WEIGHT OF SLAB AND SHRINKAGE OF SLAB.
- TOTAL BEAM DEFLECTIONS AT ℓ_s OF SPAN, Δ₀, DUE TO WEIGHT OF SLAB AND DIAPHRAGMS FOR DETAILING PURPOSE:
- (A) Δ₀ = Δ₁ + Δ₂ FOR SIMPLE SPAN.
(B) Δ₀ = Δ₁ + 2Δ₂ FOR END SPANS OF CONTINUOUS BRIDGE.
(C) Δ₀ = Δ₁ + 3Δ₂ FOR INTERIOR SPANS OF CONTINUOUS BRIDGE.
- ③ TOTAL INITIAL PRESTRESS IS BASED ON 72.6% f'_s, f'_s = 270 ksi AND A_s = 0.217 sq. in.
- * MINIMUM CONCRETE f'_c (AT 28 DAYS) SHALL BE 6,000 psi. MINIMUM f'_c AT RELEASE SHALL BE 5,000 psi.

SPECIFICATIONS:
CONSTRUCTION: STANDARD SPECIFICATIONS OF THE IOWA DEPARTMENT OF TRANSPORTATION, CURRENT SERIES, WITH CURRENT APPLICABLE SPECIAL PROVISIONS AND SUPPLEMENTAL SPECIFICATIONS.
DESIGN: A.A.S.H.T.O. LRFD, SERIES OF 2007, WITH MINOR MODIFICATIONS.

DESIGN STRESSES:
DESIGN STRESSES FOR THE FOLLOWING MATERIALS ARE TO BE IN ACCORDANCE WITH A.A.S.H.T.O. LRFD SPECIFICATIONS FOR HIGHWAY BRIDGES, SERIES OF 2007:
REINFORCING STEEL IN ACCORDANCE WITH SECTION 5, GRADE 60.
CONCRETE IN ACCORDANCE WITH SECTION 5, f'_c = 5000 psi (EXCEPT AS NOTED)
PRESTRESSING STEEL IN ACCORDANCE WITH SECTION 5, f'_s = 270,000 psi.

NOTES:
THESE BEAMS ARE DESIGNED FOR AASHTO LIVE LOADS AS INDICATED IN ABOVE TABLE WITH AN ALLOWANCE OF 20 lb. PER SQUARE FOOT OF ROADWAY FOR FUTURE WEARING SURFACE.
HOLD DOWN POINTS FOR DEFLECTED STRANDS MAY BE MOVED TOWARD ENDS OF BEAM A DISTANCE OF 0.05 L MAXIMUM AT PRODUCER'S OPTION.
ALL PRESTRESSING STRANDS SHALL CONFORM TO ASTM A416 GRADE 270 LOW RELAXATION STRANDS.
TOPS OF BEAMS ARE TO BE STRUCK OFF LEVEL AND FINISHED AS PER MATERIALS IM570.
BEARINGS SHALL BE AS DETAILED ON OTHER DESIGN SHEETS. BEAMS TO BE USED IN BRIDGES MADE CONTINUOUS BY THE POURED IN PLACE FLOOR, ARE TO BE AT LEAST 28 DAYS OLD BEFORE THE FLOOR IS PLACED UNLESS A SHORTER CURING TIME IS APPROVED BY THE BRIDGE ENGINEER.
THE PORTIONS OF THE PRESTRESS BEAMS THAT ARE TO BE EMBEDDED IN THE ABUTMENT AND PIER DIAPHRAGMS SHALL BE ROUGHENED FOR A DISTANCE OF 10" FROM THE BEAM END BY SANDBLASTING OR OTHER APPROVED METHODS TO PROVIDE SUITABLE BOND BETWEEN THE BEAM AND THE DIAPHRAGM IN ACCORDANCE WITH ARTICLE 2403.03, I, OF THE STANDARD SPECIFICATIONS.
ALL BEAMS ARE TO BE INCREASED IN LENGTH TO COMPENSATE FOR ELASTIC SHORTENING, CREEP AND SHRINKAGE.
IF THE STEEL DIAPHRAGM OPTION IS ALLOWED AND USED, HOLES MUST BE CAST IN THE WEB TO ACCOMMODATE THE STEEL DIAPHRAGM ATTACHMENTS AS DETAILED ON THE STEEL DIAPHRAGM DETAIL SHEET.
IF SOLE PLATE IS REQUIRED FOR BEARING, SOLE PLATE IS TO BE SET IN FORMS WHEN BEAM IS CAST AND FORMED OUT BELOW TO EXCLUDE CONCRETE AS DETAILED ON THE BEARING SHEET.
0.6" DIAMETER STRANDS STRESSED TO NOT MORE THAN 5,000 LBS. EACH MAY BE USED IN LIEU OF THE φ BARS WHICH RUN THE FULL LENGTH OF THE BEAM IN THE TOP FLANGE.

LATEST REVISION DATE
11-09

APPROVED BY BRIDGE ENGINEER

STANDARD DESIGN - 44' ROADWAY, THREE SPAN BRIDGE
**PRETENSIONED PRESTRESSED
CONCRETE BEAM BRIDGES**
MARCH, 2007

C BEAM DETAILS
H44-29-07