


SECTION

A+B+C = Pipe Length

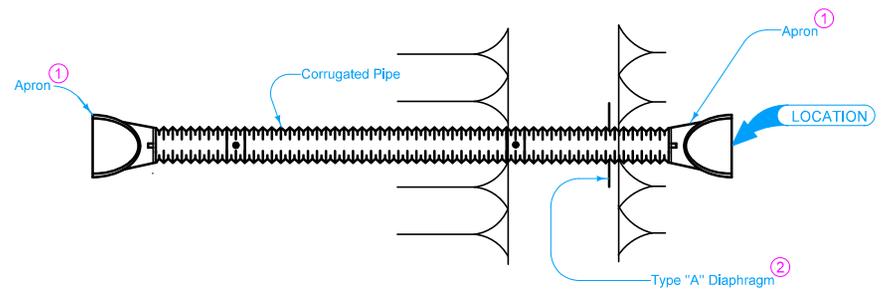

PLAN

Standard type joint couplings are required. See [Materials I.M. 441](#).

Connection to outlet, if required, is incidental and will not be paid for separately.

- ① See [DR-203](#).
- ② See [DR-501](#). If more than one diaphragm is specified, install 15 feet apart or as specified.

Possible Tabulations:
104-3

IOWA DOT	REVISION	
	New	04-21-15
STANDARD ROAD PLAN		DR-632
		SHEET 1 of 1
REVISIONS: New. Replaces Detail 1403.		
 APPROVED BY DESIGN METHODS ENGINEER		
CORRUGATED PIPE CULVERT LETDOWN STRUCTURE WITH DOUBLE ELBOW		