




FRONT ELEVATION

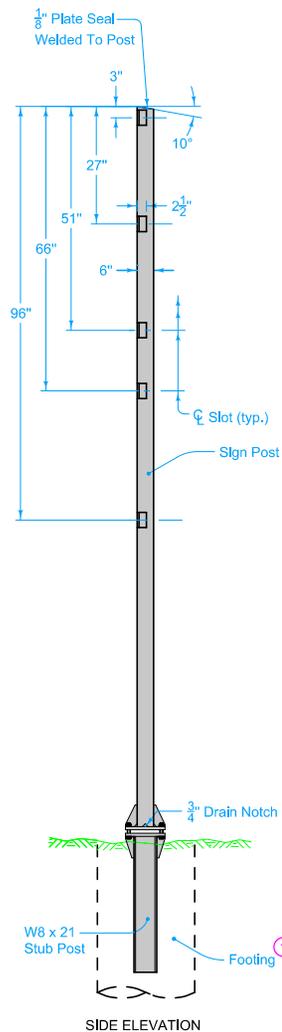

SIDE ELEVATION

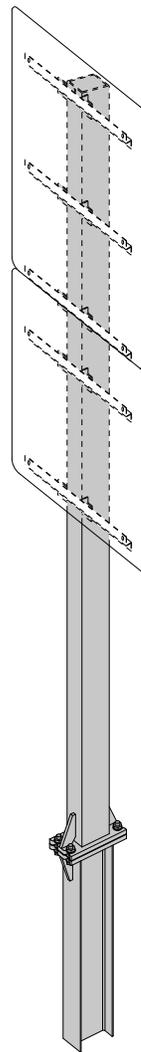


OBLIQUE FRONT VIEW

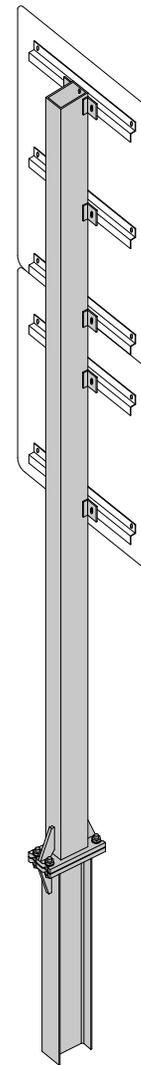

OBLIQUE BACK VIEW

Plumb signpost by installing brass stock or strip shims complying with ASTM B 36. Furnish two shims each of 0.012" and 0.032" thickness (total of 4 per post).

① Refer to Standard Road Plan SI-112 for footing information.

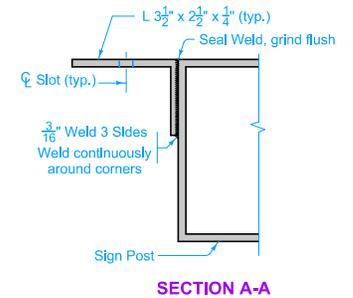

Possible Contract Item:  
Steel Breakaway Sign Post, Rectangular Tube

	REVISION	
	3	04-19-16
	<b>STANDARD ROAD PLAN</b>	
		<b>SI-114</b>
		SHEET 1 of 2

REVISIONS: Moved footing information to SI-112. Changed title and added oblique views.

*Brian Smith*  
 APPROVED BY DESIGN METHODS ENGINEER

**FREWAY/EXPRESSWAY  
 SPEED LIMIT  
 SUPPORT POSTS**

