






TYPICAL SECTION

H IN FT.	CL - CL ABUT. BRG.	FOOTING SIZE
16 TO 18	138'-10 151'-4 163'-10 176'-4 188'-10 201'-4 213'-10 226'-4 243'-0	3'-6 x 7' x 20' 3'-6 x 7' x 22' 3'-6 x 8' x 22'
19 TO 21	138'-10 151'-4 163'-10 176'-4 188'-10 201'-4 213'-10 226'-4 243'-0	3'-6 x 7' x 22' 3'-6 x 8' x 22'
22 TO 24	138'-10 151'-4 163'-10 176'-4 188'-10 201'-4 213'-10 226'-4 243'-0	3'-6 x 8' x 22' 3'-6 x 9' x 22'







d2
NOTE: D = PIN DIAMETER.
DIMENSIONS ARE OUT TO OUT.

FOOTING SIZE	REINFORCING STEEL (ONE FOOTING)				TOTAL WEIGHT (LB.)	STRUCTURAL CONCRETE (CY)
	BAR	NO., SIZE & SPACING	LENGTH	WEIGHT (LB.)		
3'-6 x 7' x 20'	d2	44 - #9 AS SHOWN	9'-5	1409	2099	18.1
	f1	20 - #5 @ 1'-0	6'-8	139		
	f2	7 - #5 @ 1'-0	19'-8	144		
	g1	20 - #6 @ 1'-0	6'-8	200		
	g2	7 - #6 @ 1'-0	19'-8	207		
3'-6 x 7' x 22'	d2	44 - #9 AS SHOWN	9'-5	1409	2200	20.0
	f1	22 - #5 @ 1'-0	6'-8	153		
	f2	7 - #5 @ 1'-0	21'-8	158		
	g1	22 - #6 @ 1'-0	6'-8	220		
	g2	8 - #6 @ 0'-11	21'-8	260		
3'-6 x 8' x 22'	d2	44 - #9 AS SHOWN	9'-5	1409	2324	22.8
	f1	22 - #5 @ 1'-0	7'-8	176		
	f2	8 - #5 @ 1'-0	21'-8	181		
	g1	23 - #6 @ 0'-11 1/2	7'-8	265		
	g2	9 - #6 @ 0'-11	21'-8	293		
3'-6 x 9' x 22'	d2	44 - #9 AS SHOWN	9'-5	1409	2442	25.7
	f1	22 - #5 @ 1'-0	8'-8	199		
	f2	9 - #5 @ 1'-0	21'-8	203		
	g1	26 - #6 @ 0'-10	8'-8	338		
	g2	9 - #6 @ 1'-0	21'-8	293		

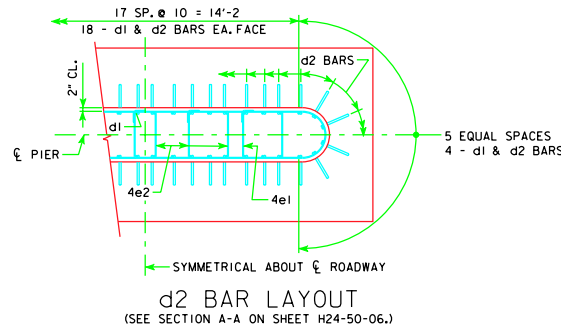

d2 BAR LAYOUT
(SEE SECTION A-A ON SHEET H24-50-06.)

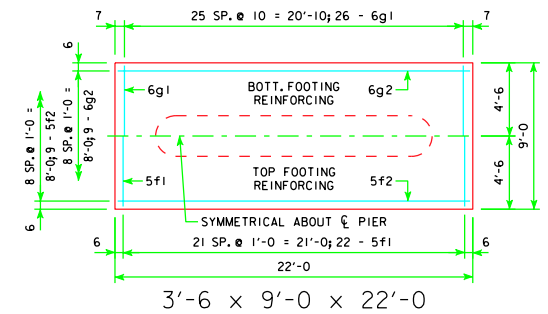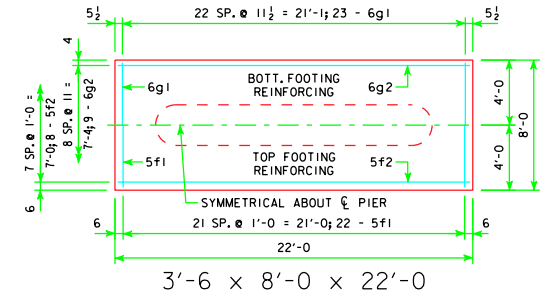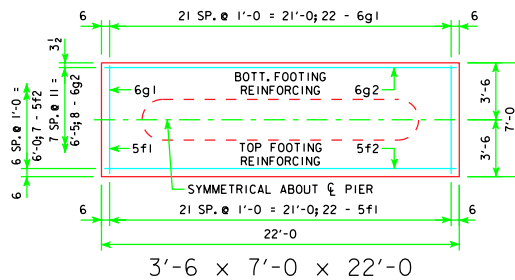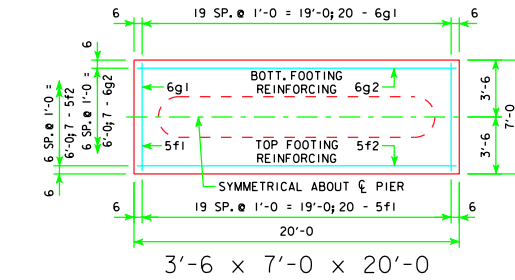

FOOTING NOTES:

THESE SPREAD FOOTINGS ARE DESIGNED AND DETAILED TO BE USED WITH THE CAP AND COLUMN DETAILS OF THE TEE PIERS AS SHOWN ON SHEET H24-50-06.

THESE SPREAD FOOTINGS SHALL EXTEND AT LEAST 6 INCHES INTO SUITABLE FOUNDATION ROCK AND THE LAST 6 INCHES OF ROCK EXCAVATION SHALL BE TO NEAT LINES OF MASONRY. THE FOUNDATION ROCK SHALL HAVE A MINIMUM LRFD NOMINAL BEARING RESISTANCE OF 30 KIIPS PER SQUARE FOOT (ALLOWABLE BEARING VALUE OF AT LEAST 5 TONS PER SQUARE FOOT).

LATEST REVISION DATE	APPROVED BY BRIDGE ENGINEER <i>Norman E. McQuinn</i>		
		STANDARD DESIGN - 24' ROADWAY, THREE SPAN BRIDGE PRETENSIONED PRESTRESSED CONCRETE BEAM BRIDGES DECEMBER, 2006	
		TEE PIER - SPREAD FOOTINGS 0° SKEW - H:16' TO 24'	H24-55-06