

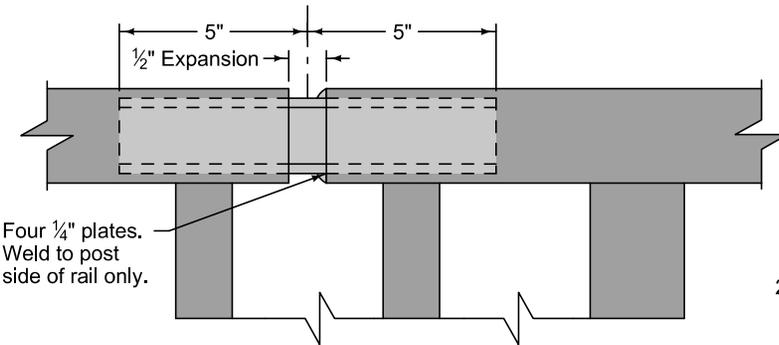


Provide expansion joint at 48'-0" max. spacing (top and bottom rail. See expansion sleeve detail.

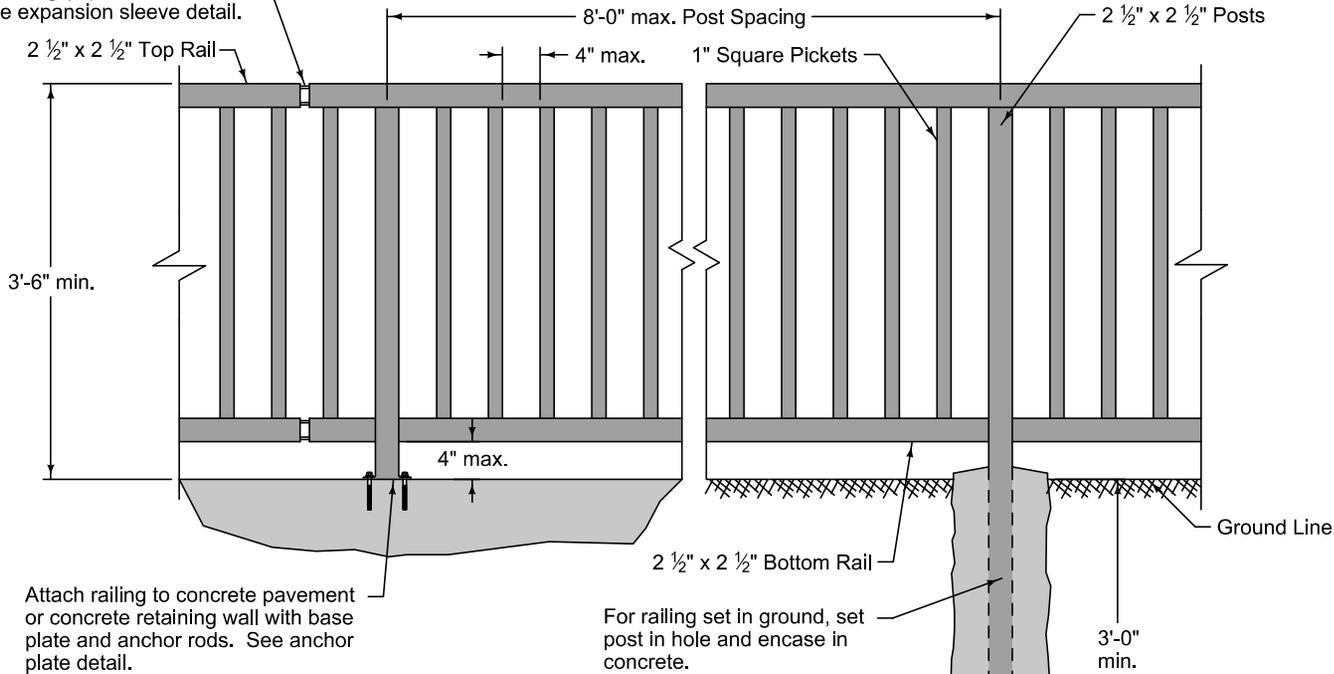

**EXPANSION SLEEVE DETAIL** ①

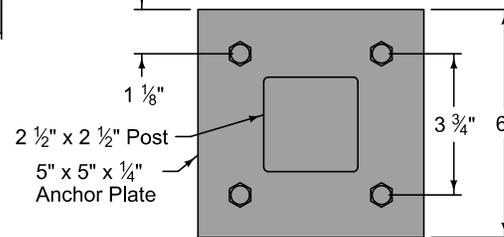

**ANCHOR PLATE DETAIL**

Weld all components with 1/4 inch fillet welds. Grind welds and connections as required to provide a smooth surface, free of burrs.

Field paint safety rail after installation as specified in the contract documents.

① Detail shown is for top rail. Expansion joint for bottom rail is similar.

	REVISION
	New 10-18-11
	<b>9080.103</b>
SHEET 1 of 1	
SUDAS Standard Specifications	
SAFETY RAIL	