



MODIFIED SUBBASE AND SUBDRAIN

IF LONGITUDINAL SUBDRAIN IS PRESENT OR IS TO BE PLACED

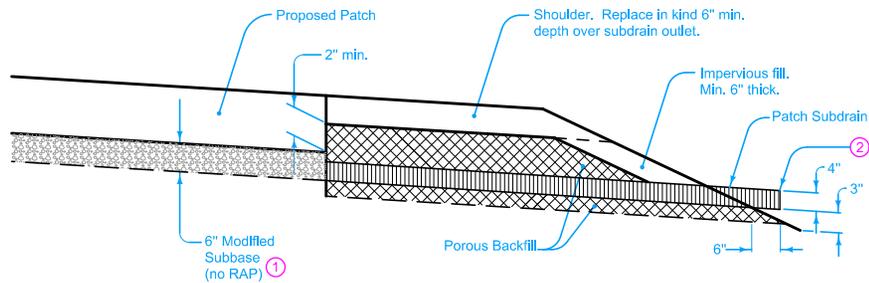

MODIFIED SUBBASE AND SUBDRAIN

WITHOUT LONGITUDINAL SUBDRAIN



DRAIN PLACEMENT

- ① 6 inches Modified Subbase (no RAP) if required by plan. When placed, extend Modified Subbase (no RAP) over longitudinal subdrain, if present.
- ② If longitudinal subdrain (shoulder) is not to be placed or if it is not present on side of roadway to be patched, then place Patch Subdrain at low end(s) of patch.

Possible Contract Items:
Subbase (Patches)
Patch Subdrain

Possible Tabulation:
102-6C

IOWA DOT	REVISION	
	1	04-21-15
STANDARD ROAD PLAN		PR-140
		SHEET 1 of 1

REVISIONS: Removed references to rodent guards.

Brian Smith
APPROVED BY DESIGN METHODS ENGINEER

SUBBASE PATCHES