


**DESIGNER  
INFO**

Obtain the Engineer's approval for location and length of stabilized entrances prior to constructing.

- ① Place engineering fabric prior to placing aggregate. Use fabric for Embankment Erosion Control complying with Section 4196 of the Standard Specifications.
- ② Use aggregate meeting Gradation No. 13 of Section 4109 of the Standard Specifications.
- ③ Depth may need to be increased depending on the weight of contractor vehicles and equipment.

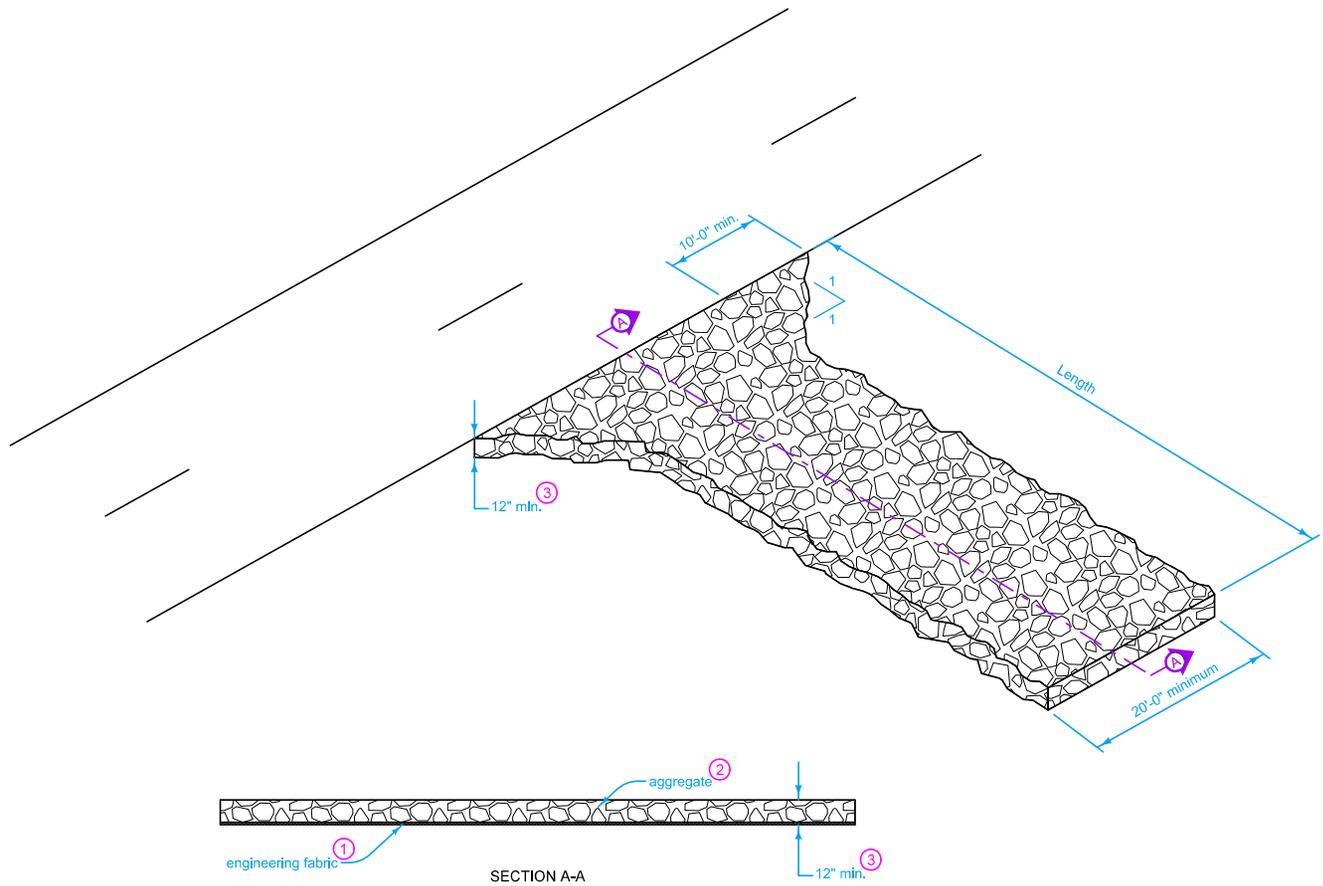

	REVISION
	1   04-16-19
<b>STANDARD ROAD PLAN</b>	<b>EC-303</b>
SHEET 1 of 1	
<small>REVISIONS: Increased minimum depth from 6" to 12" and added circle note 3.</small>	
<small>APPROVED BY DESIGN METHODS ENGINEER</small>	
<b>STABILIZED CONSTRUCTION ENTRANCE</b>	