


## POST BASE DETAIL

SHOWING THE RODENT GUARD

THE RODENT GUARD SHALL BE PLACED AROUND THE BASE PLATE.

THE RODENT GUARD IS STAINLESS STEEL STANDARD GRADE WIRE CLOTH, 4 MAXIMUM OPENING WITH A MINIMUM WIRE DIAMETER OF AWG NO. 16 WITH A MINIMUM 2" LAP.


SECURE WIRE CLOTH TO BASE PLATE AFTER ERECTION WITH & STAINLESS STEEL BANDING. THE RODENT GUARD SHALL NOT EXTEND ABOVE THE TOP OF THE BASE PLATE.

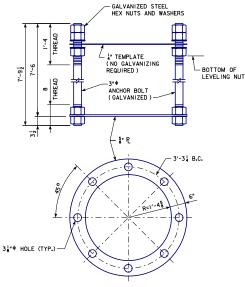

## ANCHOR BOLT ASSEMBLY

ALL ANCHOR BOLT MATERIALS AND GALVANIZING SHALL BE IN ACCORDANCE WITH ARTICLE 4187.01, C, 3 OF THE STANDARD SPECIFICATIONS.

WEIGHT OF ONE ANCHOR BOLT ASSEMBLY: 2063 LBS. (INCLUDES TEMPLATE, EXCLUDES GALVANIZING

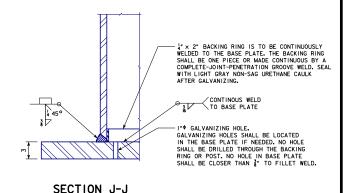

SEE STANDARD SHEET SCST-02-17 FOR LOCATION OF POST BASE DETAIL.

SEE STANDARD SHEET SCST-08-17 FOR SPREAD FOOTING FOUNDATION DETAILS.

SEE STANDARD SHEET SCST-09-17 FOR DRILLED SHAFT FOUNDATION DETAILS.





STANDARD DESIGN

STEEL CANTILEVER SIGN TRUSS

JULY, 2017

POST BASE SUPPORT DETAILS

SCST-06-17