



PART ELEVATION VIEW

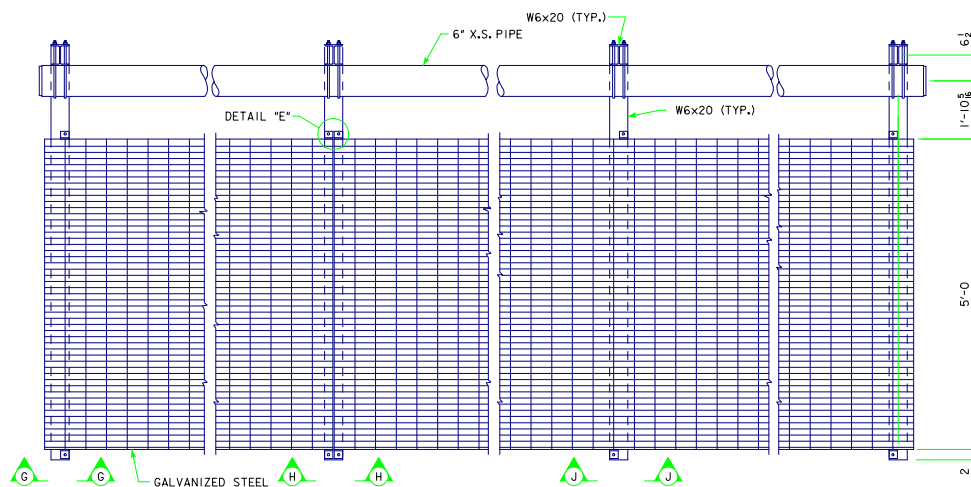


PART PLAN VIEW

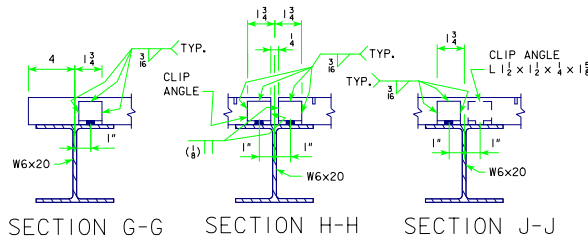

SECTION G-G


SECTION H-H

SECTION J-J

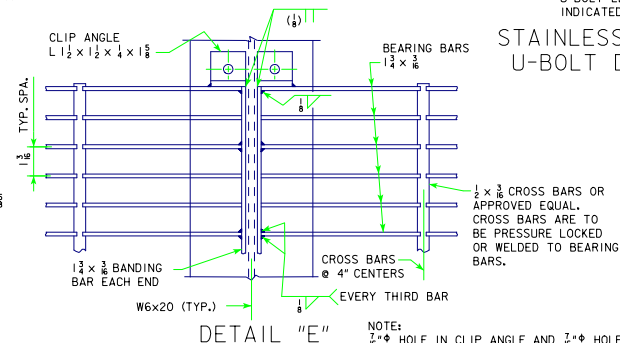


DETAIL "E"


NOTE:
7/16" HOLE IN CLIP ANGLE AND 7/16" HOLE IN W6x20 FOR 3/4" GALVANIZED A325 BOLT. ADJUST CLIP SO GRATING BEARS ON BEAM.

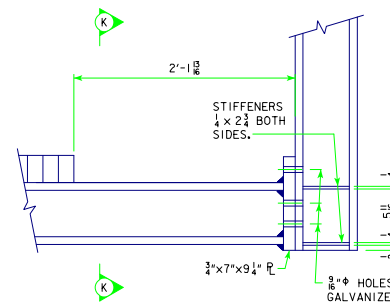


DETAIL "F"

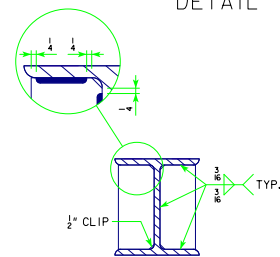

TYPICAL STIFFENER DETAIL




STAINLESS STEEL U-BOLT DETAIL

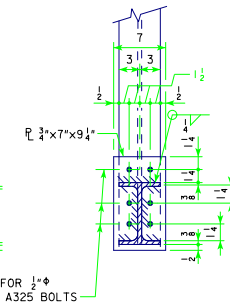


SECTION K-K

D.M.S. DETAILS LOCATED ELSEWHERE IN THESE PLANS

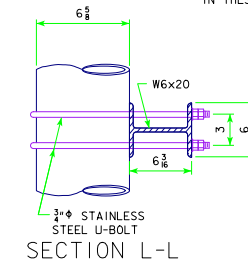

SECTION L-L

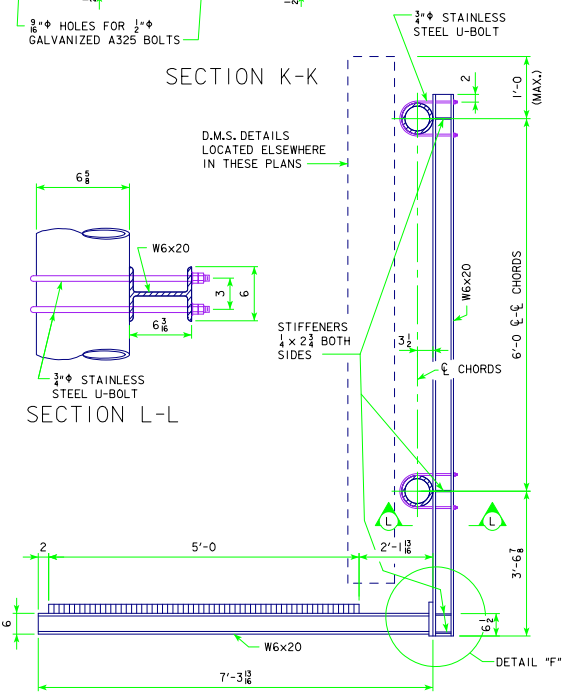

TYPICAL WORK PLATFORM SECTION

LATEST REVISION DATE	<i>Thomas E. McQuinn</i> APPROVED BY BRIDGE ENGINEER	 Iowa Department of Transportation Highway Division	
		STANDARD DESIGN ROADSIDE DYNAMIC MESSAGE SIGN (D.M.S.) SUPPORT SEPTEMBER, 2010	
		WORK PLATFORM DETAILS	DMS-SS3-10