



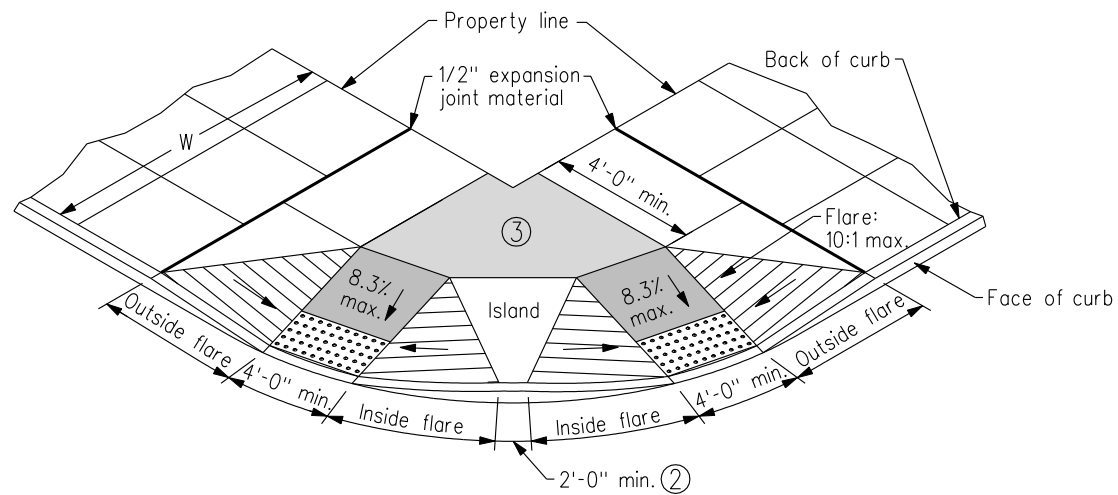

PREFERRED RAMP ①

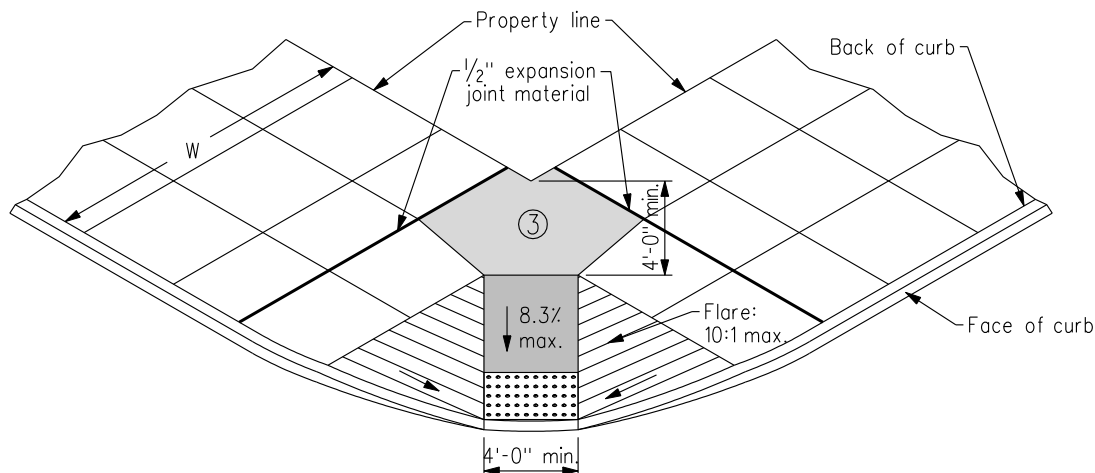

OPTIONAL RAMP ②

Refer to Figure 7030.204 for general ramp details.

- ① Construct preferred ramp when sufficient right-of-way is available.
- ② Optional ramp is acceptable if center island cannot be constructed at a minimum width of 2 feet and height of 3 inches.
- ③ Landing: Maximum slope of 2% in any direction.

Key

W = Sidewalk width as specified in the contract documents.

-  = Ramp
-  = Landing
-  = Detectable warning

 SUDAS	REVISION	
	NEW	10/21/08
	FIGURE 7030.206	
	SHEET 1 OF 1	
CURB RAMPS WITHIN INTERSECTION RADIUS FOR CLASS A SIDEWALK		