


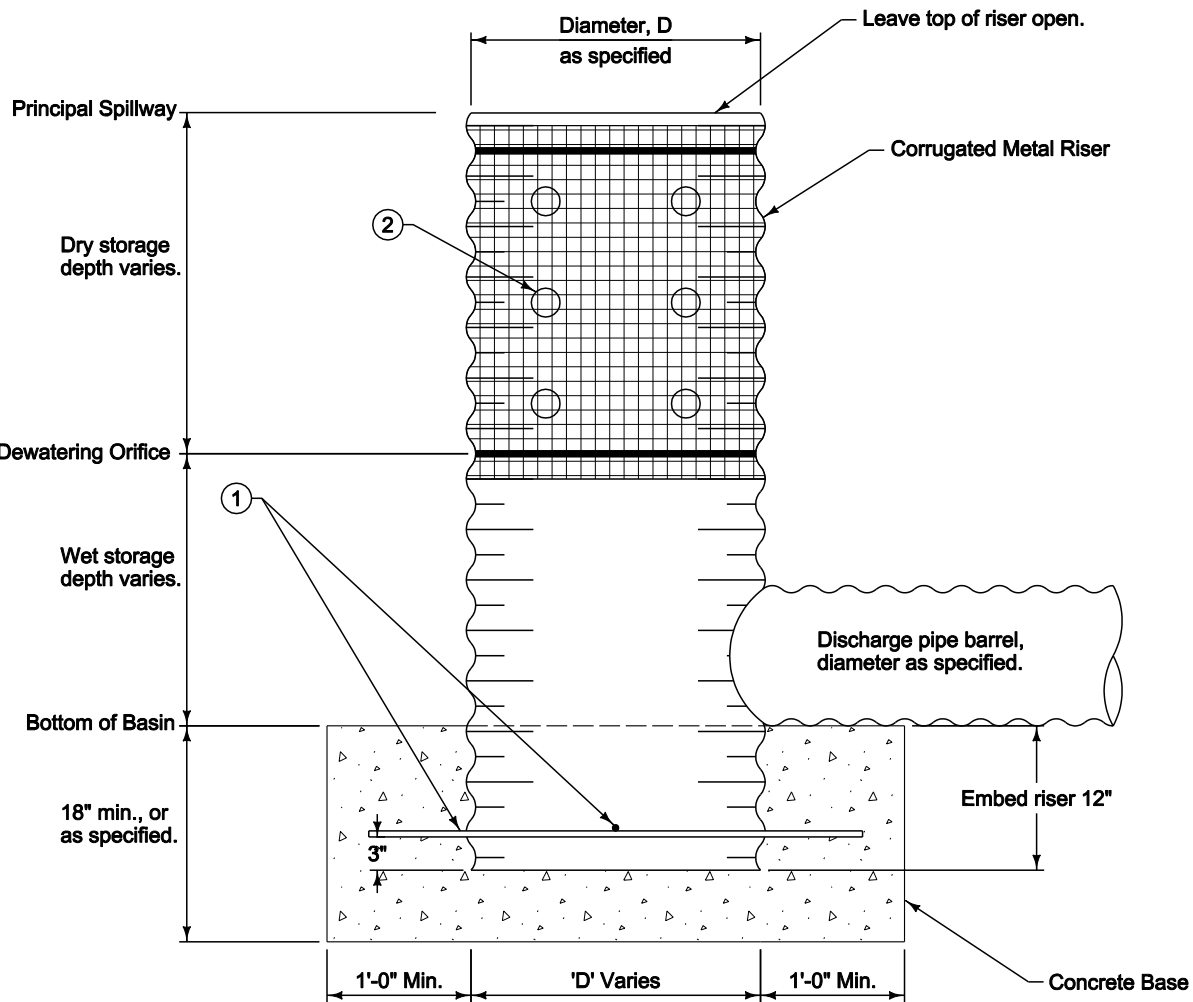

Elevations and dimensions not given are as specified in the contract documents.

- ① Drill four, 5/8 inch diameter holes, 3 inches from bottom of riser pipe and insert two, #4 bars in an "X" configuration. Length of bars = $D+16$ inches
- ② Provide perforation configuration as specified in the contract documents.

 SUDAS	REVISION	
	1	10-18-11
	9040.15 SHEET 1 of 1	
SUDAS Standard Specifications		
SEDIMENT BASIN DEWATERING DEVICE (PERFORATED RISER)		