
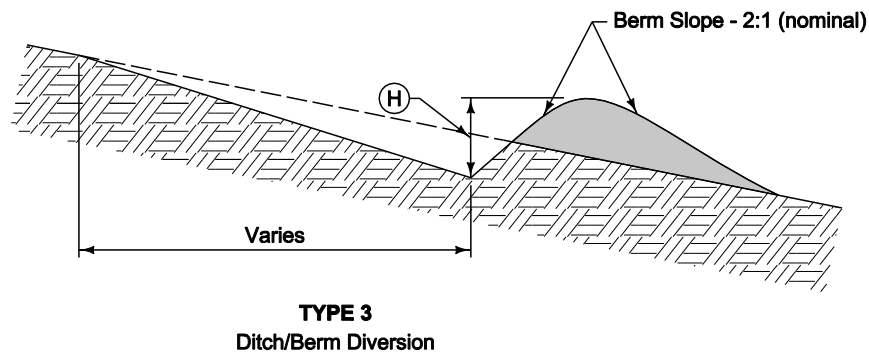
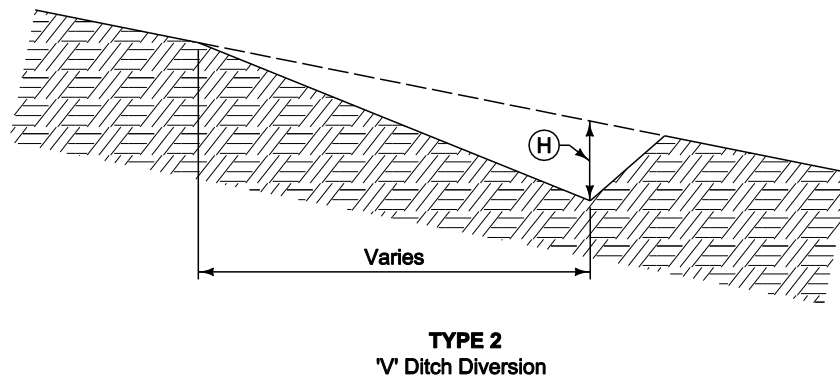


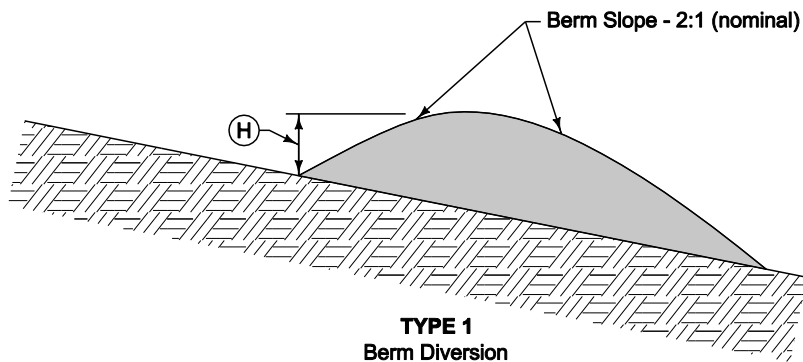

Diversion Types 1, 2, and 3 may be used interchangeably unless otherwise specified in the contract documents.

Alternate configurations may be used upon approval from the Engineer.

Ⓜ Total height of diversion (swale and berm): 18 inch minimum or as specified.

	REVISION	
	1	10-18-11
	9040.8	
	SHEET 1 of 1	

SUDAS Standard Specifications
TEMPORARY EARTH DIVERSION STRUCTURES