



Provide expansion joint at 48'-0" max. spacing (top and bottom rail. See expansion sleeve detail.

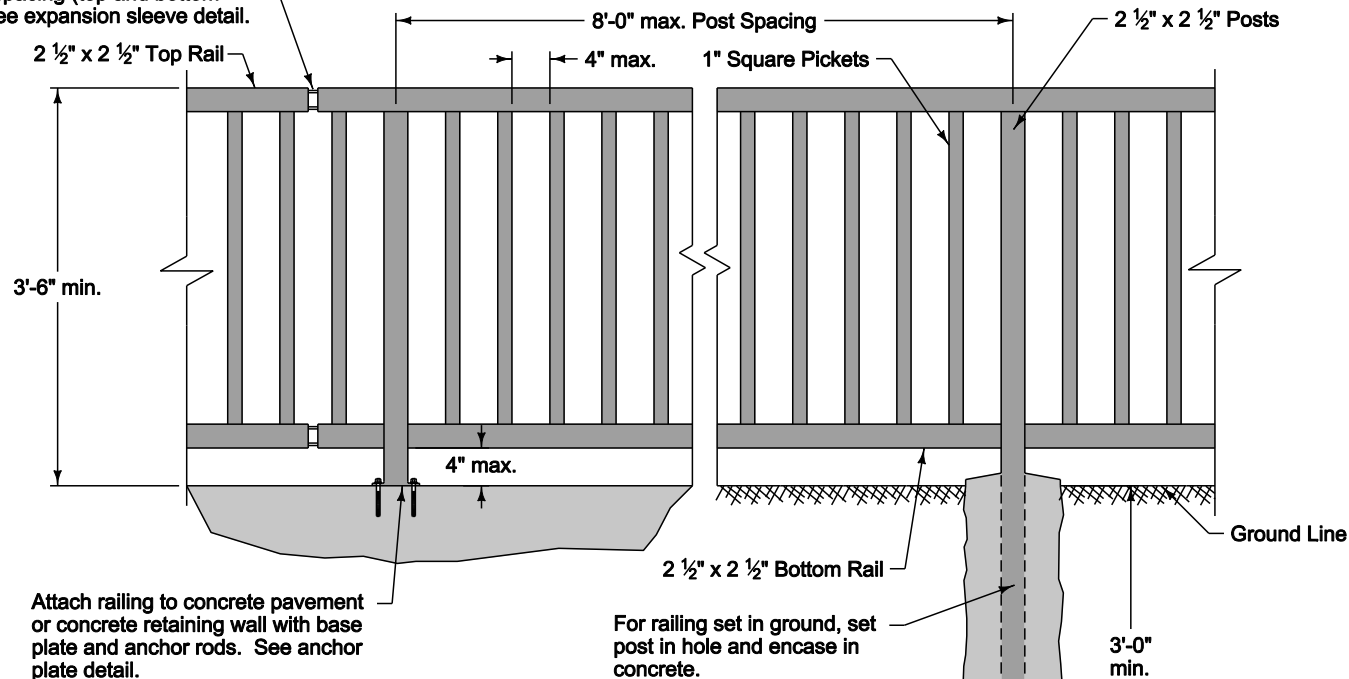


Weld all components with 1/4 inch fillet welds. Grind welds and connections as required to provide a smooth surface, free of burrs.

Field paint safety rail after installation as specified in the contract documents.

- ① Detail shown is for top rail. Expansion joint for bottom rail is similar.

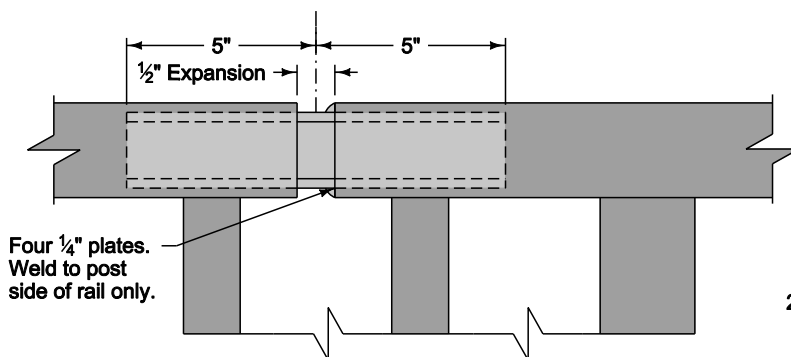

EXPANSION SLEEVE DETAIL ①

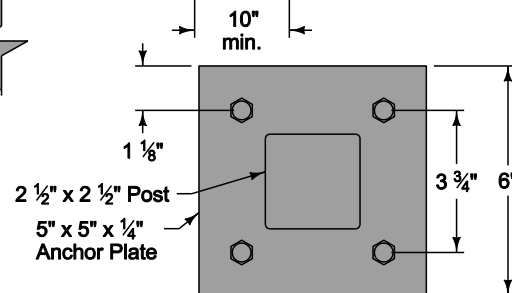

ANCHOR PLATE DETAIL

	REVISION New 10-18-11	
	9080.103	
	SHEET 1 of 1	
SUDAS Standard Specifications		
SAFETY RAIL		