



**PLAN**

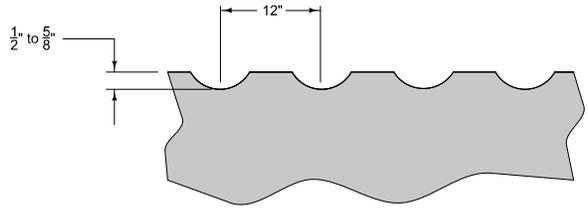

**SECTION**

**MILLED RUMBLE STRIP**

① Place continuous Milled Rumble Strips (no 12-foot gaps) on all median-side shoulders and on all interstate shoulders.

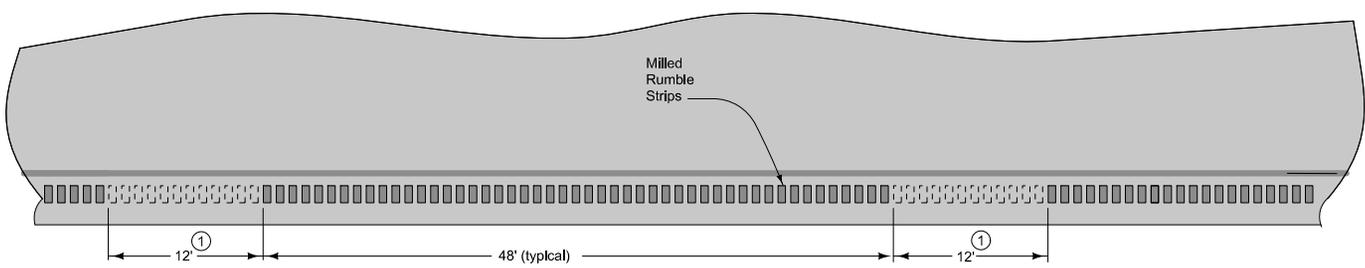

**GAP DETAILS ①**

Possible Contract Items:  
 Asphalt Emulsion for Fog Seal (Shoulder Rumble Strips)  
 Milled Shoulder Rumble Strips, HMA Surface  
 Milled Shoulder Rumble Strips, PCC Surface


Possible Tabulation:  
 112-10

<p>Iowa Department of Transportation</p> <p><b>STANDARD ROAD PLAN</b></p>	REVISION 4   04-17-12	
	PV-12	
	SHEET 1 of 2	



REVISIONS: Added drawing to sheet 2 to clarify procedure for gapping rumble strips for a pedestrian crossing.

*Deanna Mifflin*  
 APPROVED BY DESIGN METHODS ENGINEER

**MILLED SHOULDER RUMBLE STRIPS**

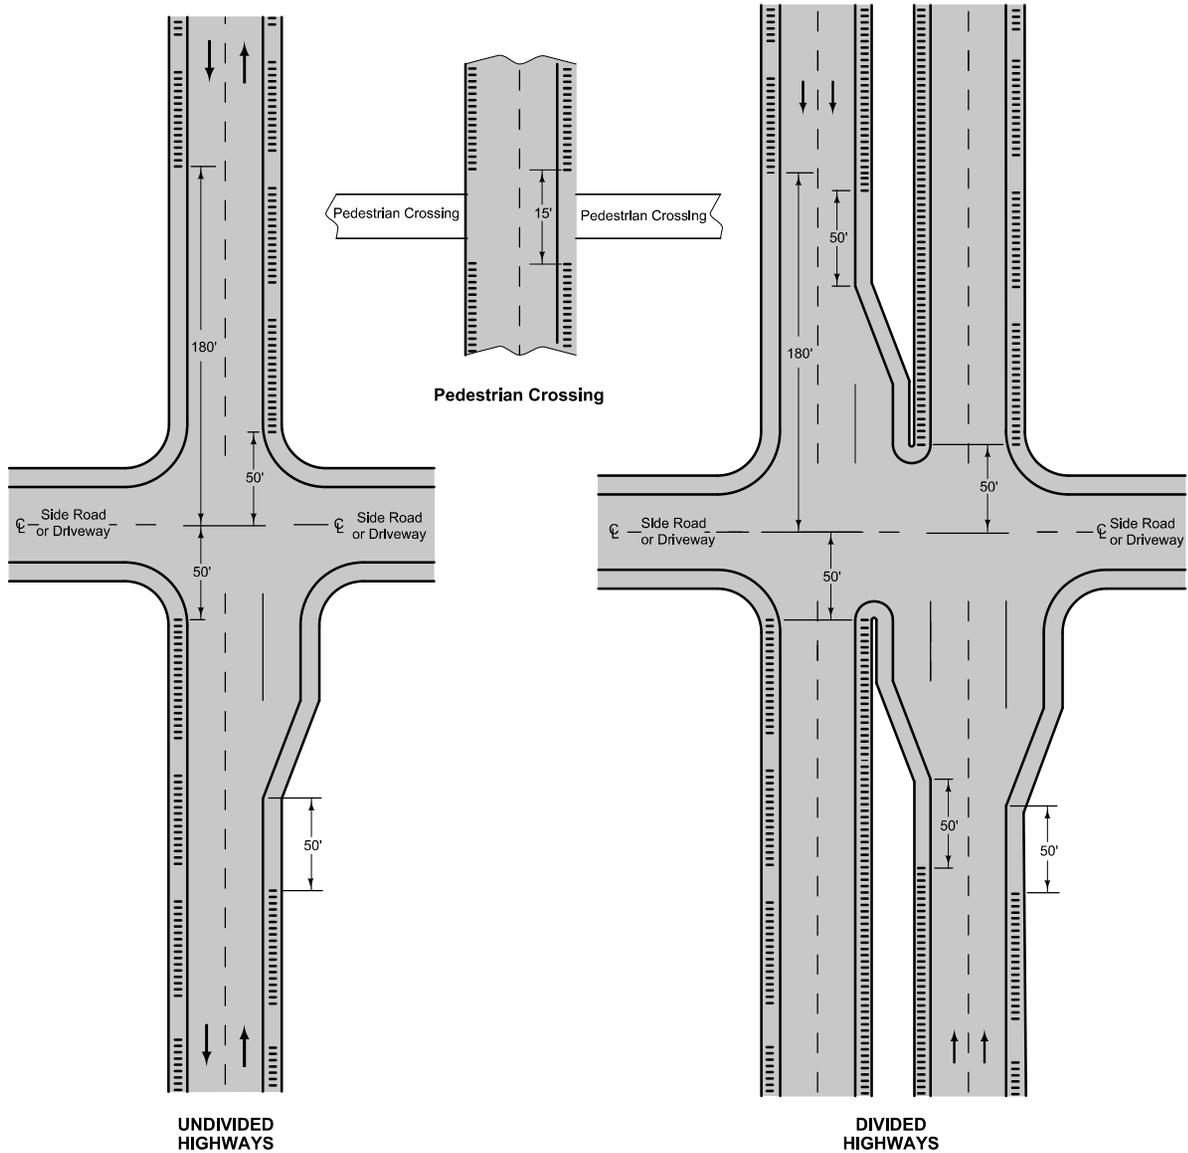

**INTERSECTION SITUATIONS**

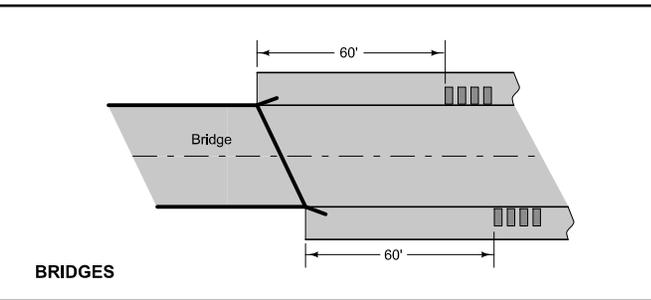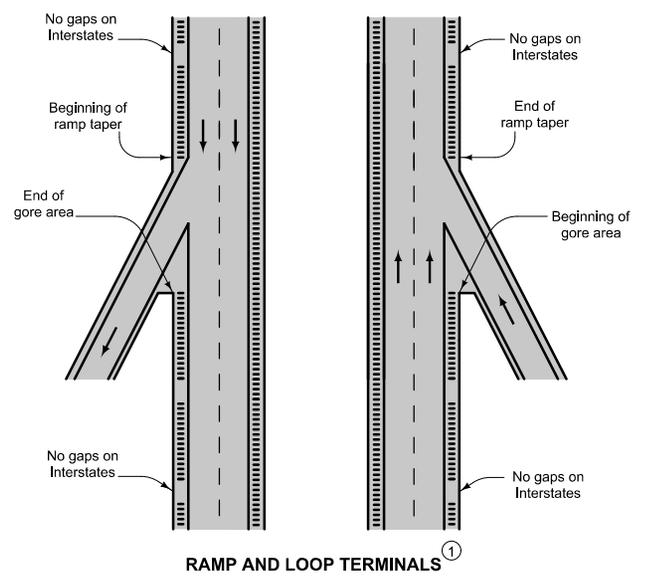

① Place continuous Milled Rumble Strips (no 12-foot gaps) on all median-side shoulders and on all interstate shoulders.

<p>Iowa Department of Transportation</p>	REVISION	
	4	04-17-12
<p><b>STANDARD ROAD PLAN</b></p>	<p><b>PV-12</b></p>	
	<p>SHEET 2 of 2</p>	
<p>REVISIONS: Added drawing to sheet 2 to clarify procedure for gapping rumble strips for a pedestrian crossing.</p>		
<p><i>Deanna Mufson</i></p> <p>APPROVED BY DESIGN METHODS ENGINEER</p>		

**MILLED SHOULDER RUMBLE STRIPS**