



PLAN

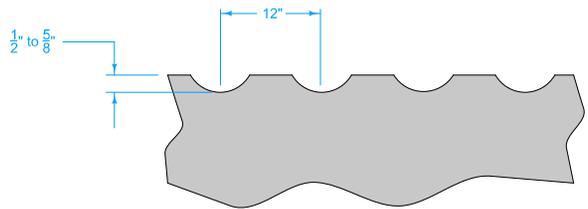

SECTION

MILLED RUMBLE STRIP

① Place continuous Milled Rumble Strips (no 12-foot gaps) on all median-side shoulders and on all interstate shoulders.

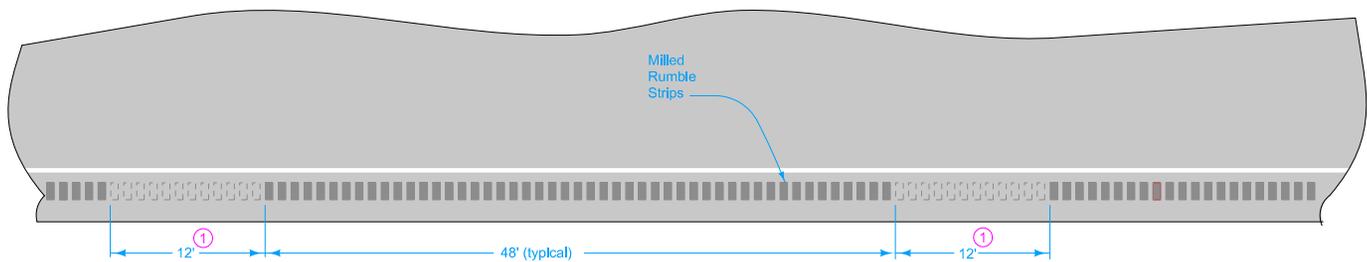

GAP DETAILS

Possible Contract Items:
 Asphalt Emulsion for Fog Seal (Shoulder Rumble Strips)
 Milled Shoulder Rumble Strips, HMA Surface
 Milled Shoulder Rumble Strips, PCC Surface


Possible Tabulation:
 112-10

	REVISION	
	5	10-20-15
STANDARD ROAD PLAN		PV-12
		SHEET 1 of 2



REVISIONS: Added note 2 on page 2.

Brian Smith
 APPROVED BY DESIGN METHODS ENGINEER

MILLED SHOULDER RUMBLE STRIPS

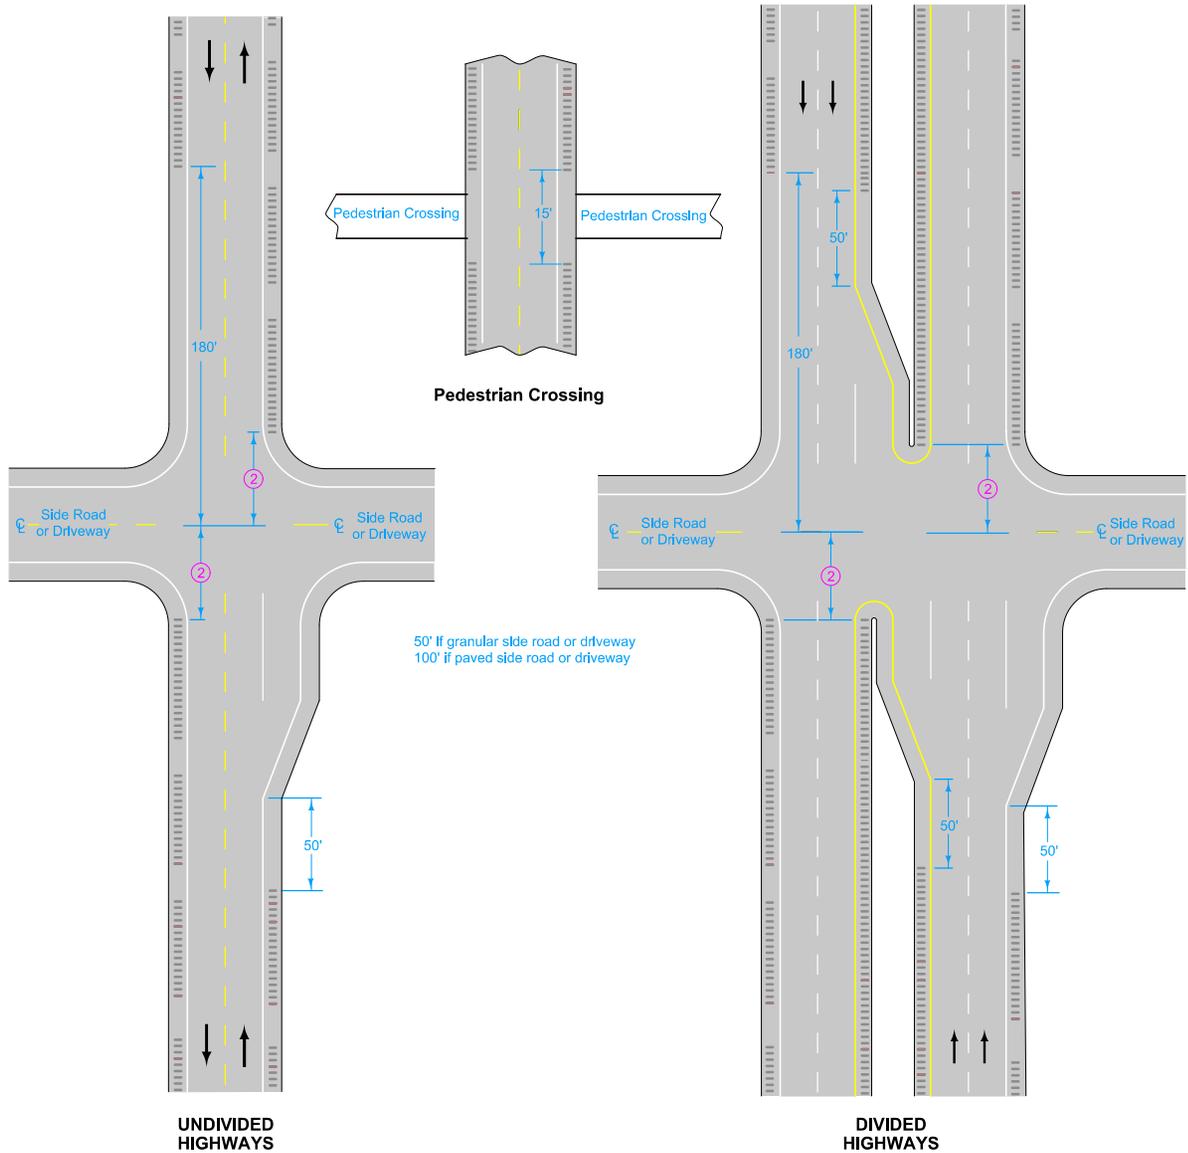

INTERSECTION SITUATIONS

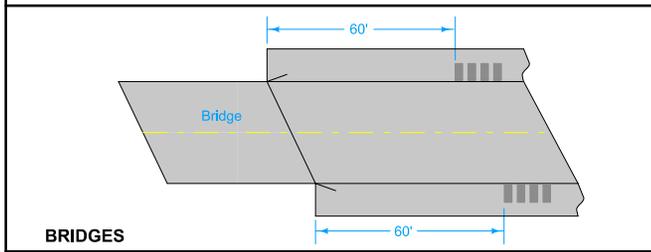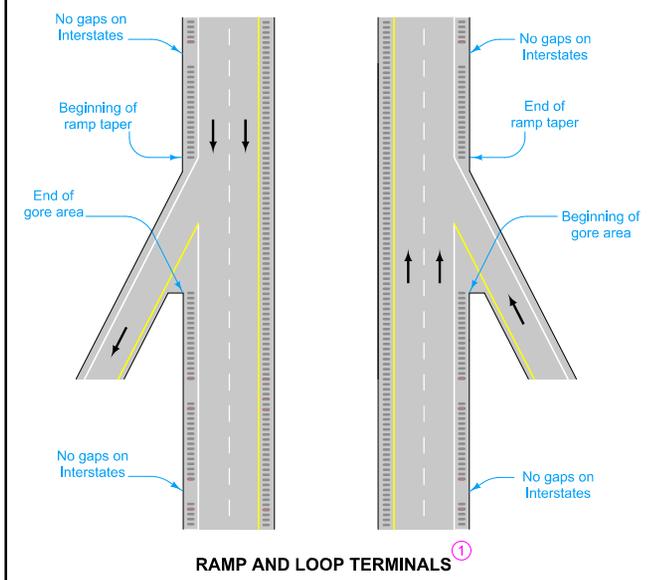

- ① Place continuous Milled Rumble Strips (no 12-foot gaps) on all median-side shoulders and on all interstate shoulders.
- ② 100 feet if paved side road, 50 feet if driveway or granular side road.

	REVISION
	5 10-20-15
STANDARD ROAD PLAN	PV-12
REVISIONS: Added note 2 on page 2.	SHEET 2 of 2
<i>Brian Smith</i> APPROVED BY DESIGN METHODS ENGINEER	

MILLED SHOULDER RUMBLE STRIPS