

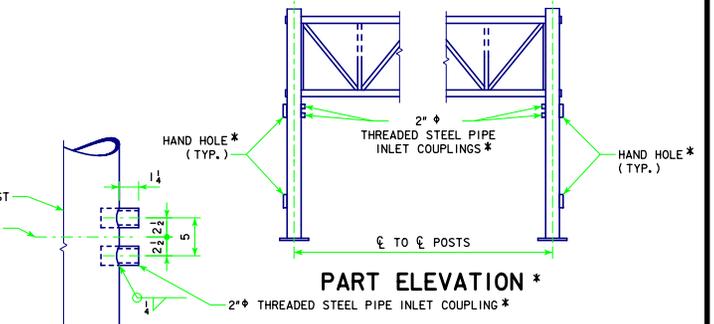
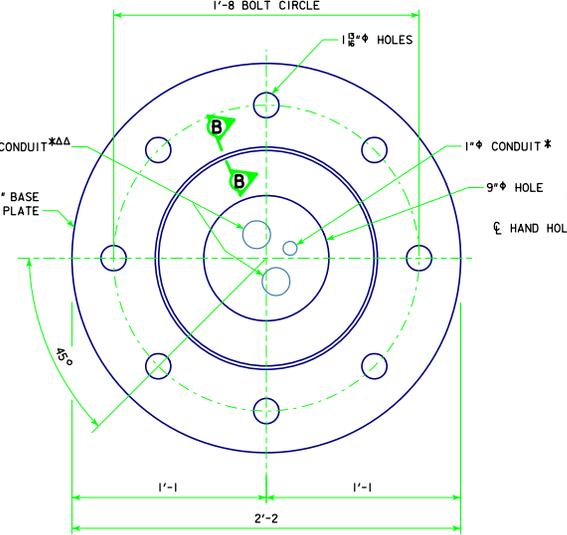
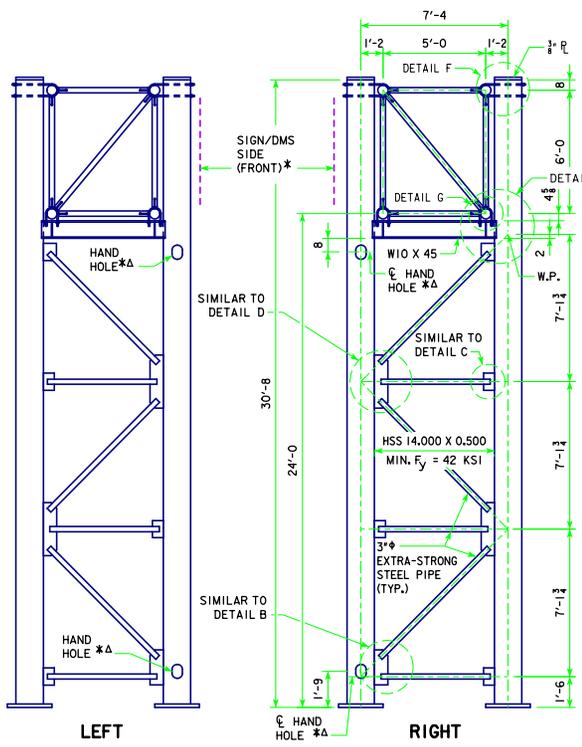
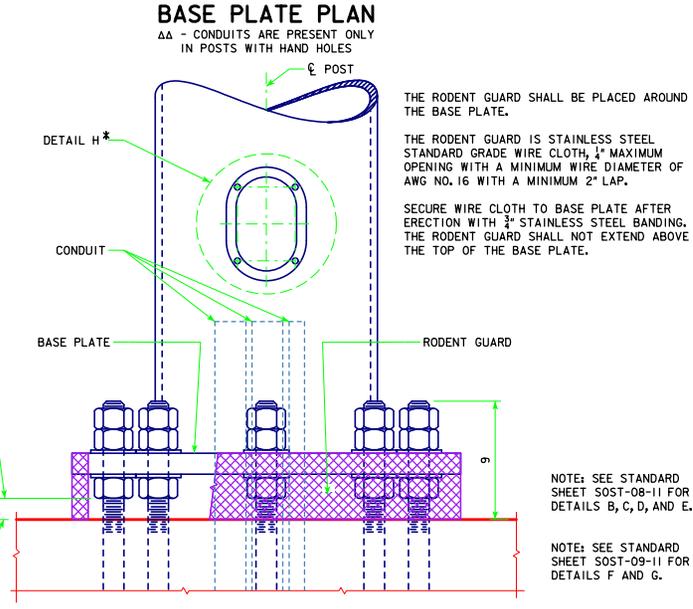


REVISION: 09-14 - MODIFIED NOTES. STEEL OVERHEAD SIGN TRUSS - SOST-06-11 - THIS SHEET ISSUED 09-11.

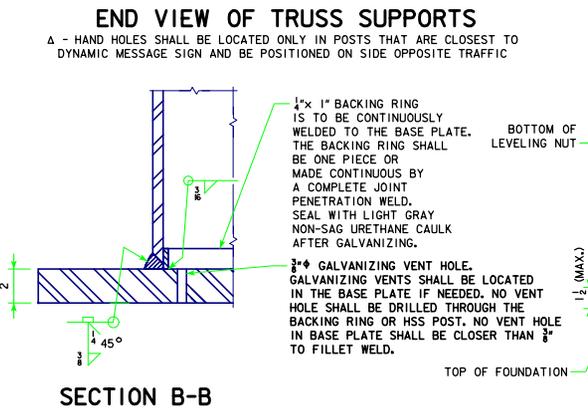

**\*FOR DMS TRUSSES ONLY**  
 HAND HOLES, CONDUIT, AND PIPE INLET COUPLINGS ARE TO BE INCLUDED ON DMS TRUSS DESIGNS ONLY. SEE STANDARD SHEET SOST-18-11 FOR FOUNDATION CONDUIT LOCATION DETAILS.  
 HAND HOLES AND ELECTRICAL INLET HOLES SHALL BE LOCATED IN BOTH TRUSS SUPPORTS UNLESS OTHERWISE INDICATED ON DETAIL PROJECT PLANS. LOCATE HOLES ONLY IN POSTS THAT ARE CLOSEST TO DYNAMIC MESSAGE SIGN.  
 THREADED STEEL PIPE INLET COUPLINGS ARE TO BE PLACED OPPOSITE TO UPPER HAND HOLE ON POST. COUPLINGS SHALL BE FITTED WITH STANDARD PLUGS UNTIL CONDUIT IS INSTALLED.  
 ALL CONDUIT SHALL BE SCHEDULE 40 PLASTIC.

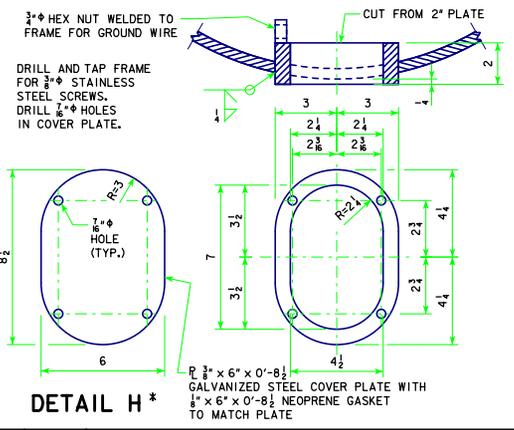

NOTE: SEE STANDARD SHEET SOST-08-11 FOR DETAILS B, C, D, AND E.  
 NOTE: SEE STANDARD SHEET SOST-09-11 FOR DETAILS F AND G.

09-14 LATEST REVISION DATE Norman E. McQuinn APPROVED BY BRIDGE ENGINEER		
	STANDARD DESIGN <b>STEEL OVERHEAD SIGN TRUSS</b> SEPTEMBER, 2011	
	SUPPORT POST BASE AND DMS ELECTRICAL ACCESS DETAILS 50'-100' SPANS	<b>SOST-06-11</b>