



**MAST ARM POLE FOUNDATION IN SOIL
TYPE A FOUNDATION**

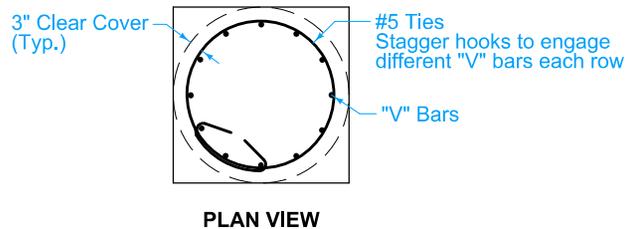

The Type A Foundation is the normally required foundation construction. Where rock is encountered, the Engineer may approve the use of the Type B or C Foundation. Prior to installing a foundation in rock, obtain a subsurface investigation certified by a geotechnical engineer licensed in the State of Iowa.

- ① Shape top 11 inches with forms.
- ② Install rodent guard or non-shrink grout with weep hole.
- ③ Furnish nut, nut and plate, or nut and anchor bolt assembly ring plate on embedded end.

Max. Mast Arm Length	Foundation		"V" Bars			Tie Bars				
	W	L	Count	Size	Length	Count	Upper Spacing		Lower Spacing	
							# Spaces	S ₁	# Spaces	S ₂
35'-0"	3'-0"	12'-0"	12	#8	11'-6"	17	9	12"	N/A	N/A
45'-0"	3'-0"	14'-0"	12	#8	13'-6"	19	11	12"	N/A	N/A
55'-0"	3'-0"	16'-0"	12	#8	15'-6"	25	12	8"	5	12"
60'-0"	3'-0"	18'-0"	13	#8	17'-6"	28	15	8"	5	12"
70'-0"	3'-6"	18'-0"	12	#10	17'-6"	28	15	8"	5	12"
80'-0"	3'-6"	21'-0"	14	#10	20'-6"	40	22	6"	10	8"
90'-0"	4'-0"	22'-0"	16	#10	21'-6"	42	24	6"	10	8"
100'-0"	4'-0"	24'-0"	18	#10	23'-6"	47	32	6"	7	8"

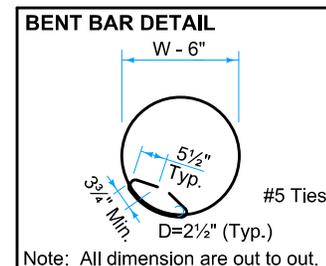


SUDAS IOWADOT	REVISION 2 10-16-18
	TS-102 SHEET 1 of 4
FIGURE 8010.102 STANDARD ROAD PLAN	REVISIONS: Added drilled shaft and spread footing foundations in rock.
Paul D. Wigand SUDAS DIRECTOR	 DESIGN METHODS ENGINEER
TRAFFIC SIGNAL POLE FOUNDATION	

Type B Foundation is applicable for traffic signal poles with mast arm lengths up to 60 feet.

If the excavation for a Type B Foundation is left open for more than 1 calendar day, install temporary barrier rail if any part of the excavation is located within the clear zone. Temporary barrier rail layout requires the Engineer's approval.


Competent rock has an average unconfined compressive strength (q_u) of at least 2.0 ksi and rock quality designation of at least 90%. Conditions not meeting minimum requirements will require either:

- A site specific design, or
- Using the parameters for Mast Arm Pole Foundation in Soil.

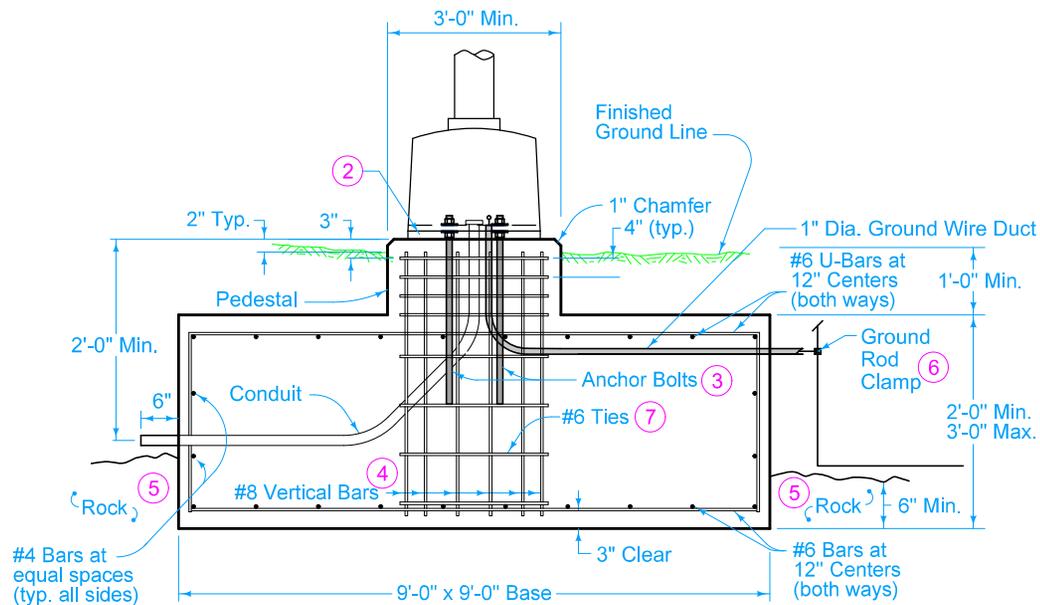


**MAST ARM POLE FOUNDATION IN ROCK
TYPE B FOUNDATION**

- ② Install rodent guard or non-shrink grout with weep hole.
- ③ Furnish nut, nut and plate, or nut and anchor bolt assembly ring plate on embedded end.
- ④ Place 13 equally spaced #8 vertical bars.
- ⑤ Cast foundation concrete against competent rock. If foundation is formed, place backfill with concrete cast against rock.
- ⑥ When in contact with rock, place ground rods as specified in National Electrical Code, current edition.
- ⑦ #6 bars spaced at 8 inch maximum. Ties may be welded to vertical bars.

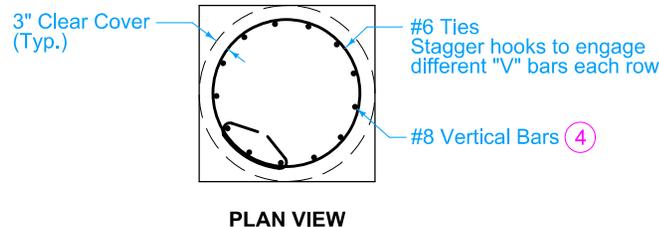


PLAN VIEW

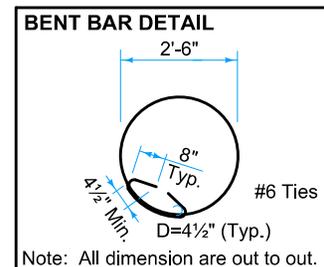


Note: All dimension are out to out.

SUDAS	IOWADOT	REVISION	
		2	10-16-18
FIGURE 8010.102	STANDARD ROAD PLAN	TS-102	
		SHEET 2 of 4	
REVISIONS: Added drilled shaft and spread footing foundations in rock.			
 SUDAS DIRECTOR		 DESIGN METHODS ENGINEER	
TRAFFIC SIGNAL POLE FOUNDATION			

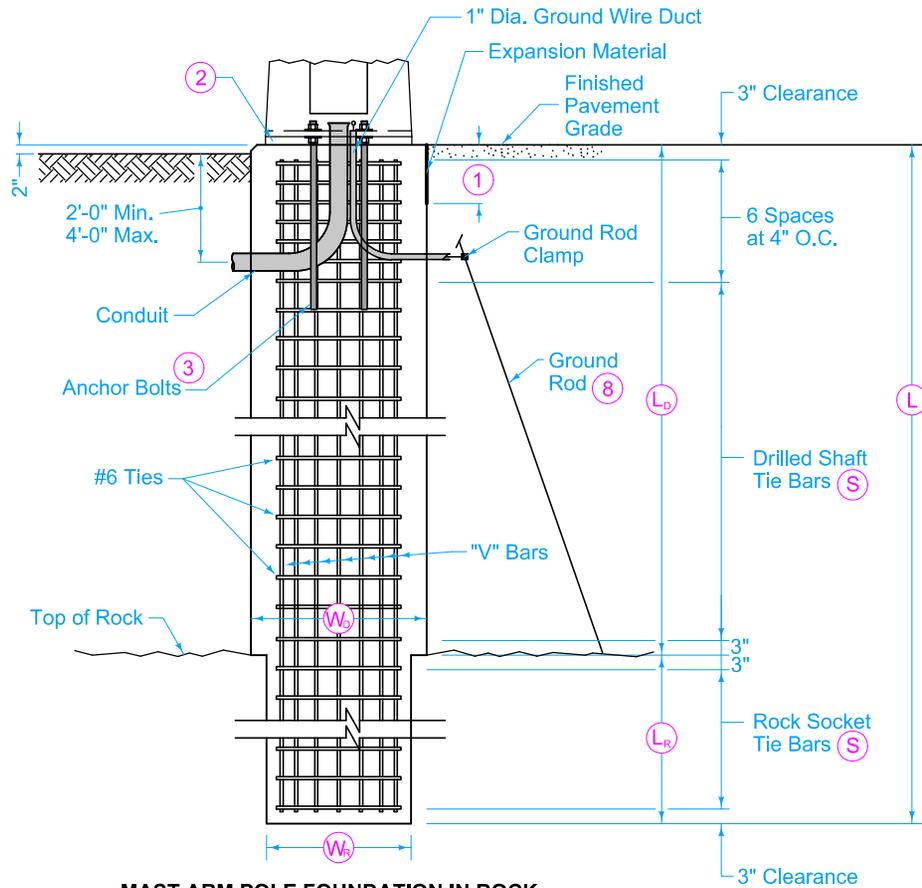

**MAST ARM POLE FOUNDATION IN ROCK
TYPE C FOUNDATION**

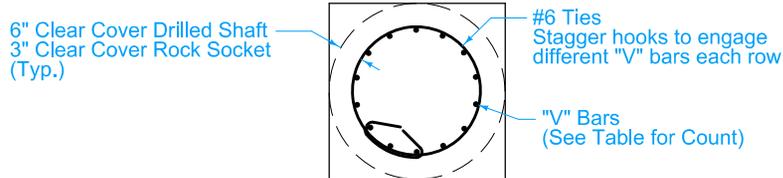


MAST ARM POLE FOUNDATION

- ① Shape top 11 inches with forms.
- ② Install rodent guard or non-shrink grout with weep hole.
- ③ Furnish nut, nut and plate, or nut and anchor bolt assembly ring plate on embedded end.
- ⑧ When in contact with rock, place ground rods as specified in National Electrical Code, current edition.


Max. Mast Arm Length	Foundation					"V" Bars			Tie Bars	
	(W_b)	(W_r)	(L)	(L_0)	(L_R)	Count	Size	Length	(S) Spacing	
	Min.	Min.			Broken Rock*					Competent Rock**
35'-0"	3'-0"	2'-6"	12'-0"	VARIES $L_0 = (L - L_R)$	4'-6"	3'-0"	13	#8	L - 6"	6"
45'-0"	3'-0"	2'-6"	14'-0"		4'-6"	3'-0"	13	#8	L - 6"	6"
55'-0"	3'-0"	2'-6"	16'-0"		4'-6"	3'-0"	13	#8	L - 6"	6"
60'-0"	3'-0"	2'-6"	18'-0"		4'-6"	3'-0"	13	#8	L - 6"	6"
70'-0"	3'-6"	3'-0"	18'-0"		5'-6"	3'-6"	14	#9	L - 6"	5½"
80'-0"	3'-6"	3'-0"	21'-0"		5'-6"	3'-6"	14	#9	L - 6"	5½"
90'-0"	4'-0"	3'-6"	22'-0"		6'-0"	4'-0"	15	#10	L - 6"	5½"
100'-0"	4'-0"	3'-6"	24'-0"		6'-0"	4'-0"	15	#10	L - 6"	5½"

*Broken rock has an average unconfined compressive strength (q_u) of at least 1.0 ksi and rock quality designation of at least 20%.
 **Competent rock has an average unconfined compressive strength (q_u) of at least 2.0 ksi and rock quality designation of at least 90%.
 Conditions not meeting minimum requirements will require site specific designs or shall use the Type A Foundation Soil parameters.

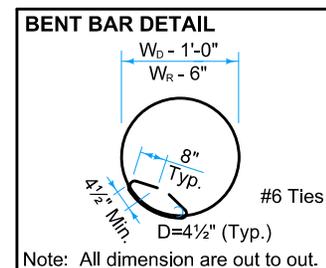

SUDAS	IOWADOT	REVISION
		2 10-16-18
FIGURE 8010.102	STANDARD ROAD PLAN	TS-102
REVISIONS: Added drilled shaft and spread footing foundations in rock.		SHEET 3 of 4
TRAFFIC SIGNAL POLE FOUNDATION		

- ① Shape top 11 inches with forms.
- ② Install rodent guard or non-shrink grout with weep hole.
- ③ Furnish nut, nut and plate, or nut and anchor bolt assembly ring plate on embedded end.

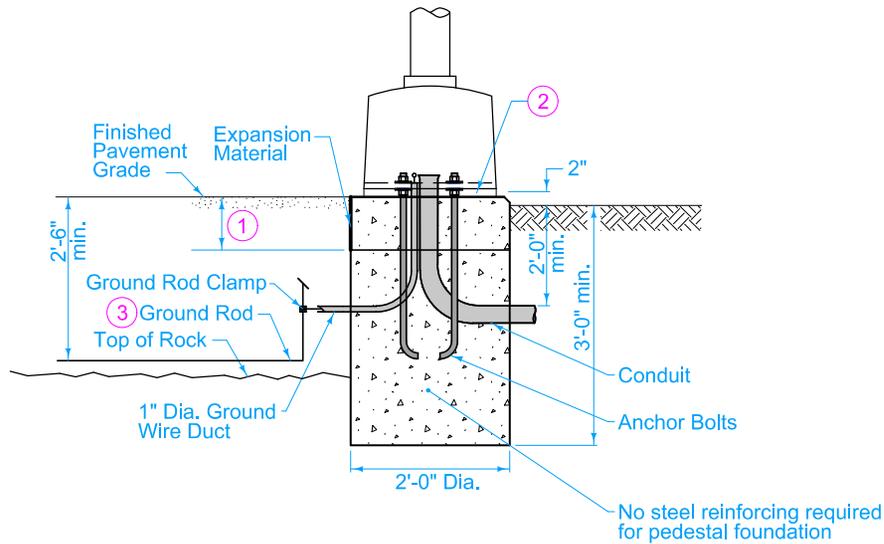

PEDESTAL POLE FOUNDATION IN SOIL OR ROCK

SUDAS	IOWADOT	REVISION
		2 10-16-18
FIGURE 8010.102	STANDARD ROAD PLAN	TS-102
		SHEET 4 of 4
REVISIONS: Added drilled shaft and spread footing foundations in rock.		
Paul D. Wigand SUDAS DIRECTOR		 DESIGN METHODS ENGINEER
TRAFFIC SIGNAL POLE FOUNDATION		