
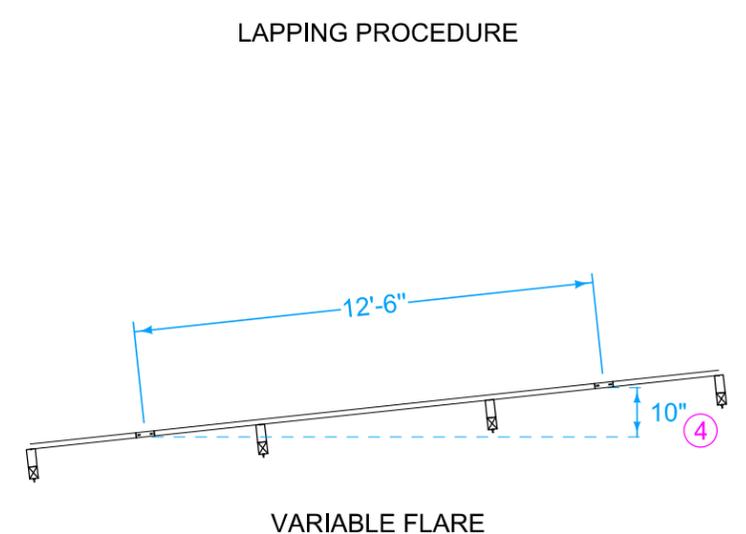


Steel Beam Guardrail Tangent End Terminal (50'-9 $\frac{1}{2}$ "  
or  
Steel Beam Guardrail Flared End Terminal for Cable Connection (40'-7 $\frac{1}{2}$ "

Pay length for: Steel Beam Guardrail (varies)

Install delineators and object markers according to SI-211.  
For grading requirements, see EW-301.  
For general guardrail details, see BA-200.

- ① See BA-203.
- ② See BA-205.
- ③ See BA-206.
- ④ When design speed is less than 55mph 10:1 flare may be used. For 12.5 feet longitudinally the offset will be 15 inches.

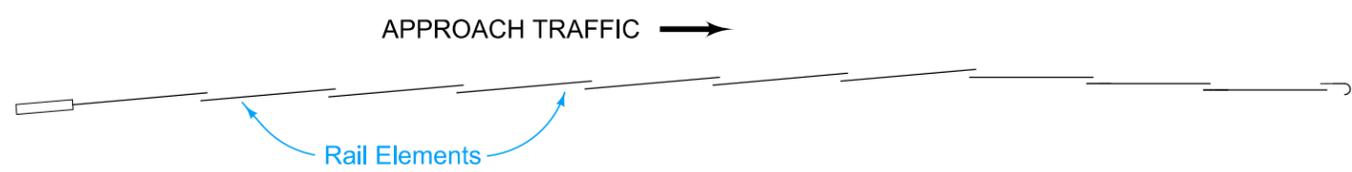

Possible Contract Items:  
Steel Beam Guardrail  
Steel Beam Guardrail End Anchor, W-Beam  
Steel Beam Guardrail Flared End Terminal, BA-206  
Steel Beam Guardrail Tangent End Terminal, BA-205

Possible Tabulation:  
108-8C

	REVISION	
	8	10-21-25
<b>STANDARD ROAD PLAN</b>		<b>BA-252</b>
REVISIONS: Changed variable flare from 12:1 to 15:1. Added note 4.		SHEET 1 of 1
 APPROVED BY DESIGN METHODS ENGINEER		
<b>STEEL BEAM GUARDRAIL INSTALLATION AT SIDE OBJECT (ONE-WAY PROTECTION)</b>		