

For joint details, see PV-101.

① Build 4 inch Sloped Curb to end of Double Reinforced Section. Refer to PV-102 for curb and runout details.


② See BR-201, BR-202, BR-203, or BR-204.

③ Longitudinal Joint (PV-101):
Single Pour - Saw cut joint per Detail B.
Two Pours - Use 'BT-2' joint

④ Polymer Grid and excavation limits of Modified Subbase 2 feet outside of pavement edge. See BR-201, BR-202, BR-203, or BR-204.

⑤ Slope subdrain to drain.

⑥ Place an "X" in the plastic concrete near the 'EF' joint at the outside edge of pavement.

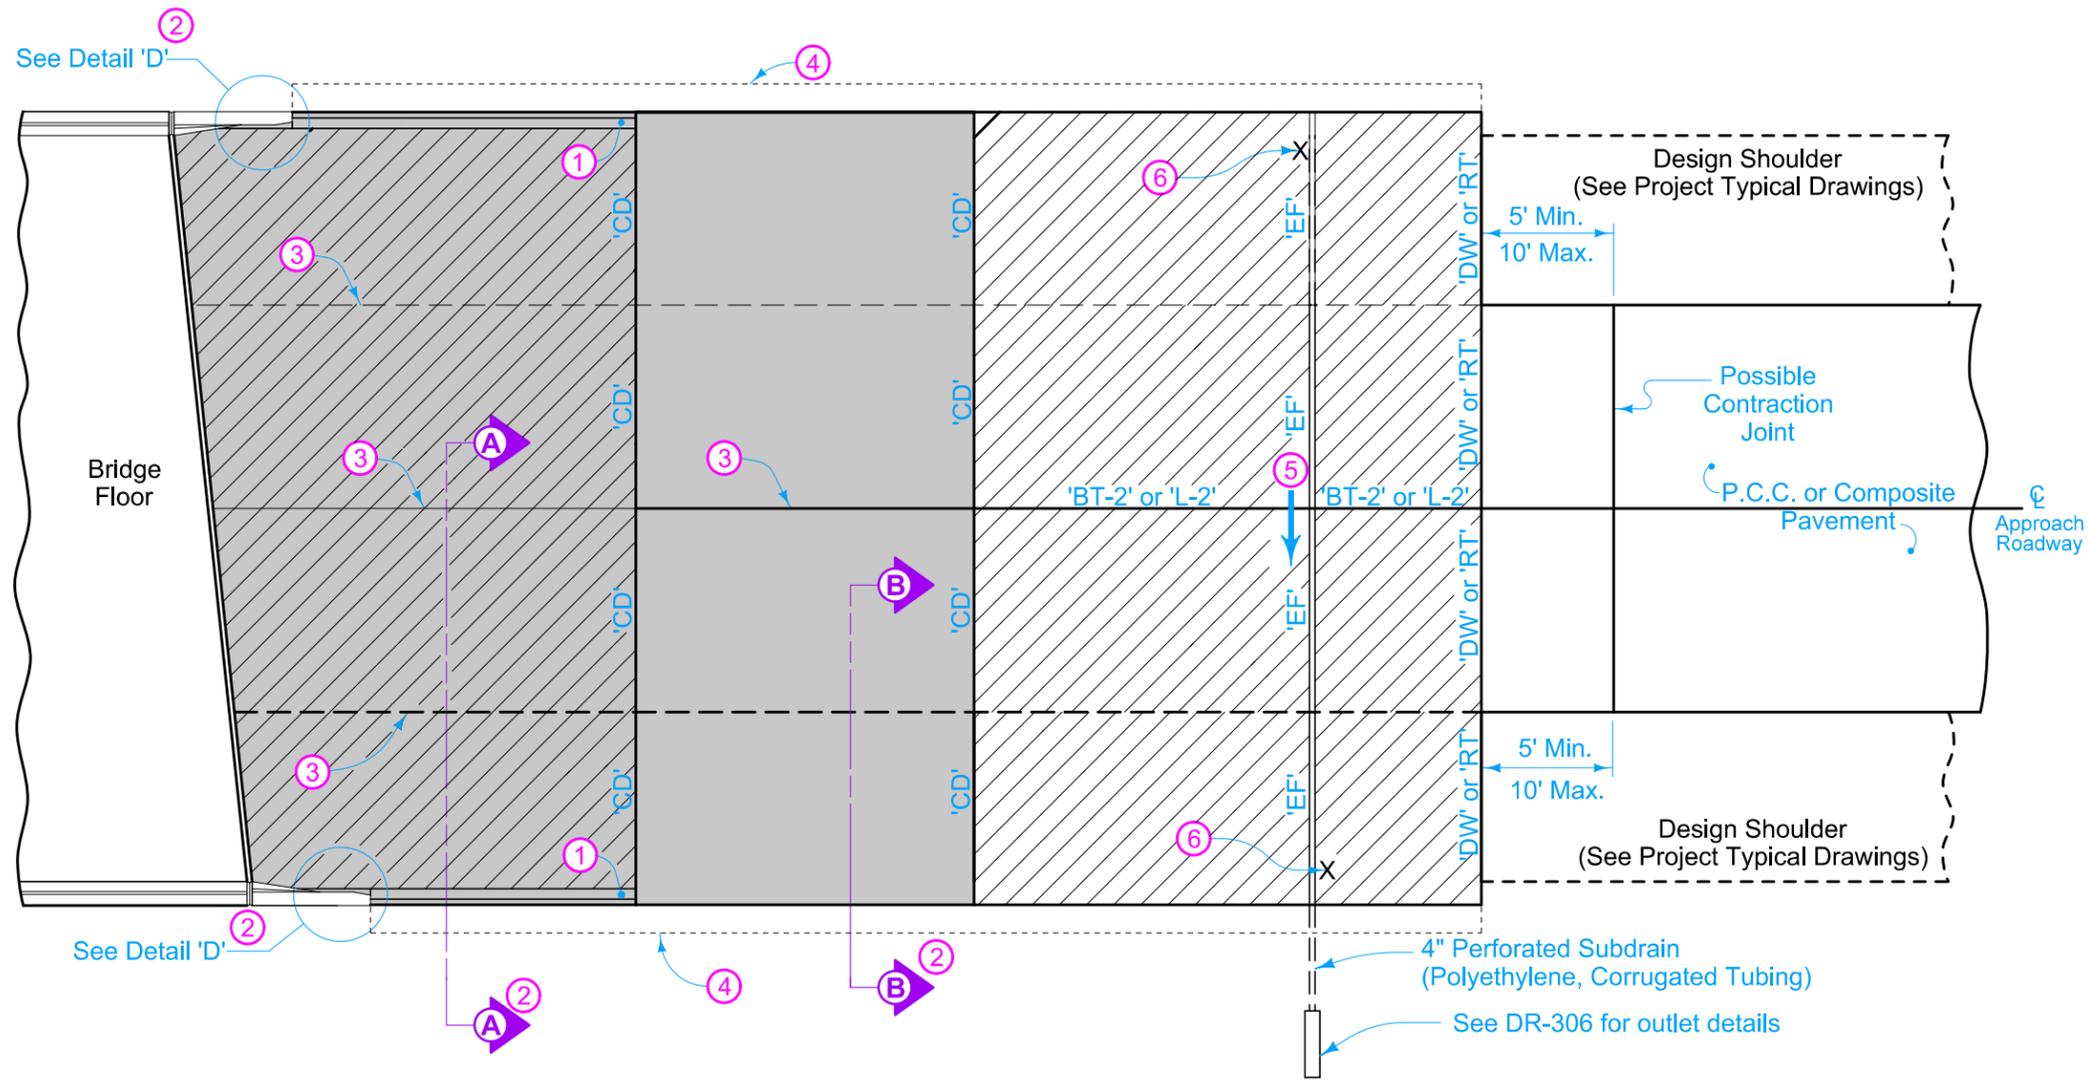

PLAN VIEW

Pay limits for contract item include the following areas:

-  Double Reinforced Section
-  Single Reinforced Section
-  Non-Reinforced Section

 STANDARD ROAD PLAN	REVISION	
	4	10-21-25
BR-211		
SHEET 1 of 1		
REVISIONS: Changed 'KT' joints to 'BT' joints.		
 APPROVED BY DESIGN METHODS ENGINEER		
BRIDGE APPROACH (ABUTTING PCC OR COMPOSITE PAVEMENT)		