



RECTANGULAR

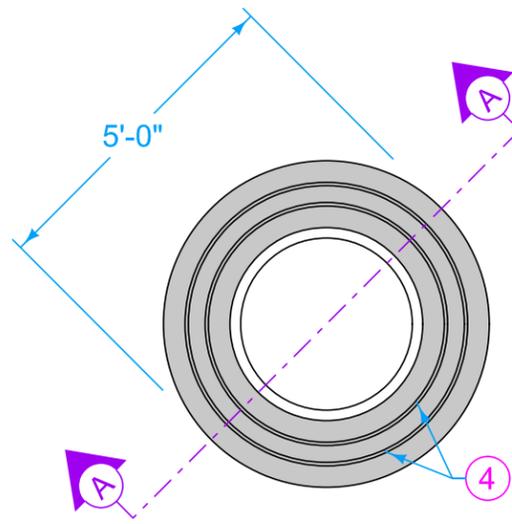


CIRCULAR

Construct boxout with Class C concrete or match pavement class. Minimum 2 inches clear on reinforcement. Minimum 12 inches of concrete between outside of casting and nearest joint. Center casting within boxout area if possible.

- ① 4 foot 8 inch (typ.) #4 bar. Place at mid-slab.
- ② If boxout is constructed prior to placement of HMA overlay or final lift of HMA pavement, boxout may be constructed low, with a 'B' joint in place of the 'E' joint, and then final lift or overlay placed.
- ③ Apply tack coat.
- ④ #4 hoops (variable length). Place at mid-slab.

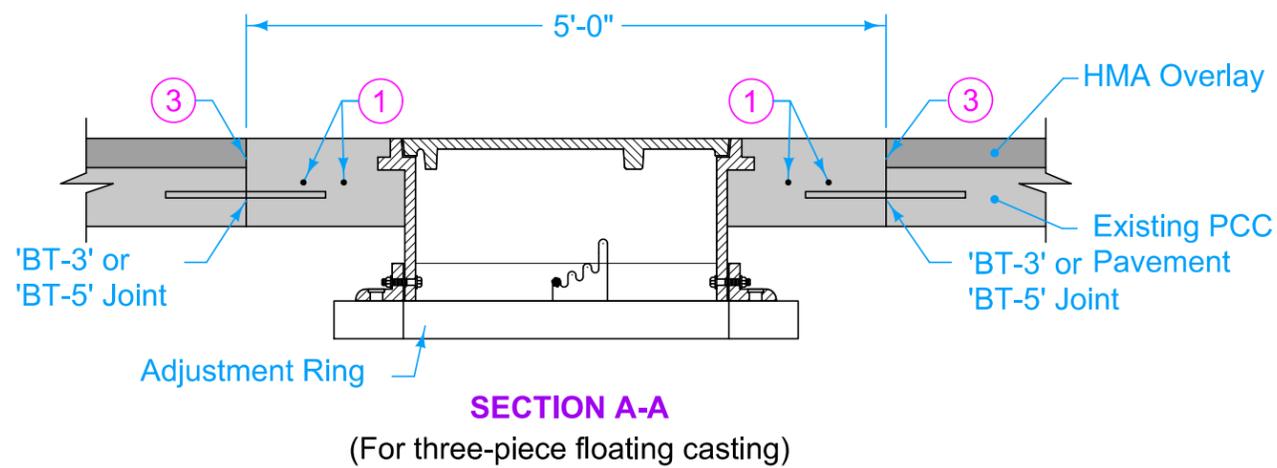

SECTION A-A
(For three-piece floating casting)

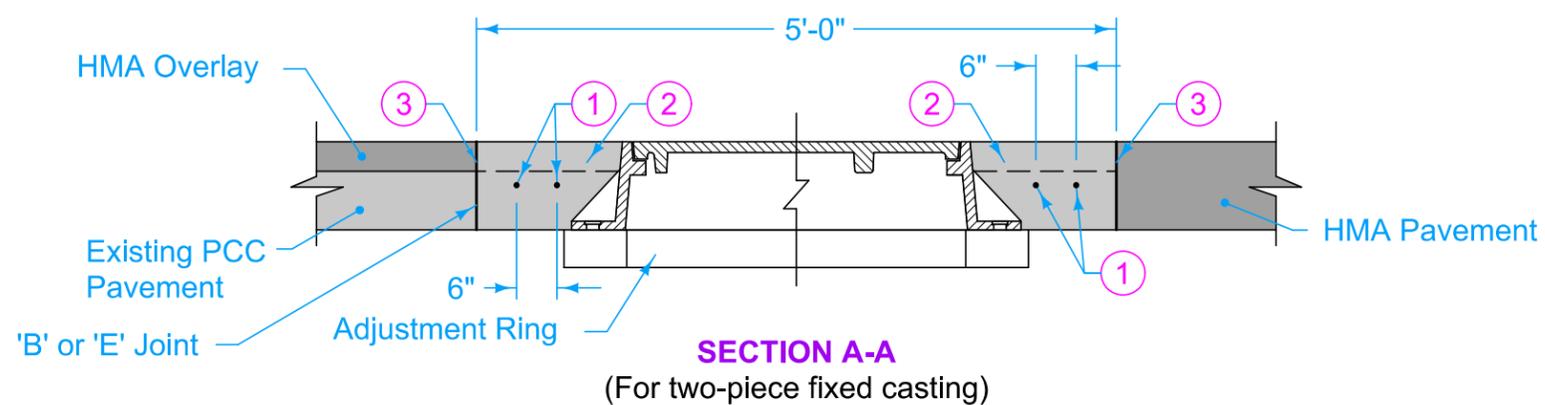

SECTION A-A
(For two-piece fixed casting)

FIGURE 7020.201

SHEET 1 OF 1

		REVISION	
		3	10-21-25
FIGURE 7020.201	STANDARD ROAD PLAN	PV-201 SHEET 1 of 1	

REVISIONS: Updated Sudas and IDOT Logos.

**MANHOLE BOXOUTS IN
 HMA PAVEMENT AND
 HMA OVERLAYS**