G20-51

RESTRICTED WIDTH

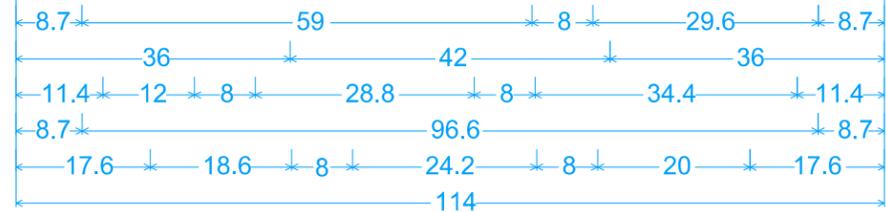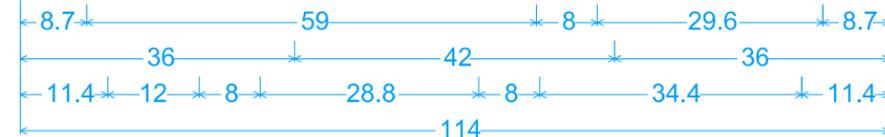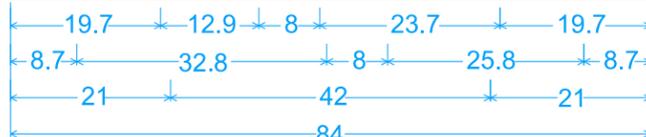Width Panel G20-58

G20-59 **MILES AHEAD**

USE NEXT EXIT

3.0" Radius, 1.3" Border, 0.8" Indent, Black on Orange;
[RESTRICTED WIDTH] D 2K; [MILES AHEAD] D 2K; [USE NEXT EXIT] D 2K;

G20-52

RESTRICTED WIDTH

Width Panel G20-58

G20-59 **MILES AHEAD**

3.0" Radius, 1.3" Border, 0.8" Indent, Black on Orange;
[RESTRICTED WIDTH] D 2K; [MILES AHEAD] D 2K;

G20-53

WIDE LOADS

OVER Width Panel G20-58

EXIT HERE

3.0" Radius, 1.3" Border, 0.8" Indent, Black on Orange;
[WIDE LOADS] D 2K; [OVER] D 2K; [EXIT HERE] D 2K;

G20-54

NO WIDE

LOADS OVER

Width Panel G20-58

3.0" Radius, 1.3" Border, 0.8" Indent, Black on Orange;
[NO WIDE] D 2K; [LOADS OVER] D 2K;
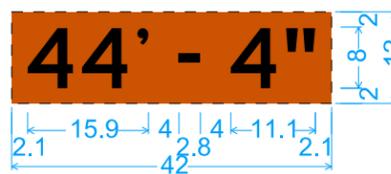
G20-55

RESTRICTED

WIDTH AHEAD

Width Panel G20-58
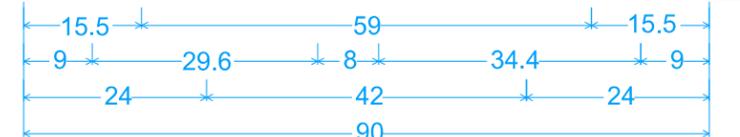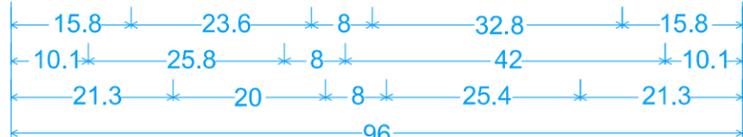
3.0" Radius, 1.3" Border, 0.8" Indent, Black on Orange;
[RESTRICTED] D 2K; [WIDTH AHEAD] D 2K;

① See TC-81 for requirement of restricted width dimension.

G20-58 ①

44' - 4"

No border, Orange;
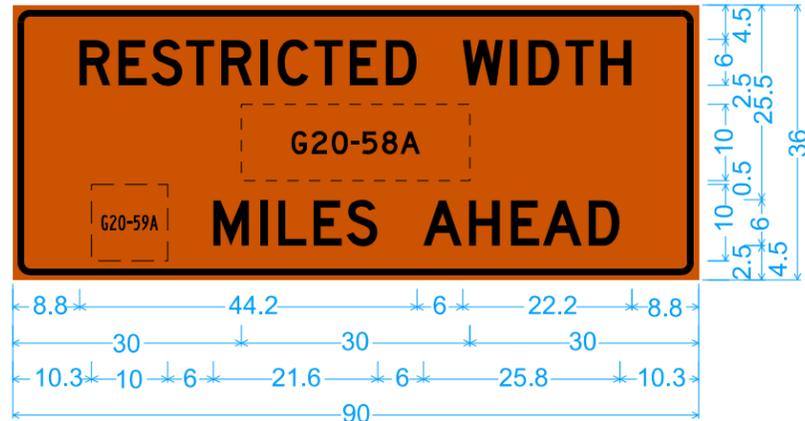[44'] Black D 2K;
[-] Black D 2K;
[4"] Black D 2K;

G20-59

4

No border, Orange;
[4] Black D 2K;

IOWA | DOT

REVISION	
1	10-18-16

SI-882

STANDARD ROAD PLAN

SHEET 1 of 2

REVISIONS: Replaced old Iowa DOT logo with new logo.

APPROVED BY DESIGN METHODS ENGINEER

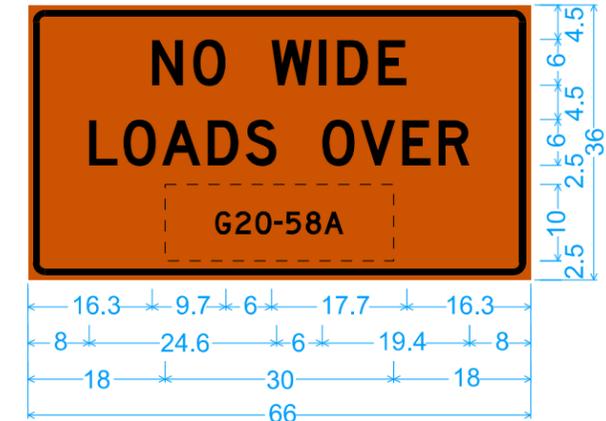**SPECIAL SIGNS FOR RESTRICTED WIDTH
TRAFFIC CONTROL ZONES**

G20-52A

RESTRICTED WIDTH

G20-58A

G20-59A

MILES AHEAD

36
4.5 6 2.5 25.5 10 0.5 10 6 2.5 4.5

8.8 — 44.2 — 6 — 22.2 — 8.8
30 — 30 — 30
10.3 — 10 — 6 — 21.6 — 6 — 25.8 — 10.3
90

2.3" Radius, 0.9" Border, 0.6" Indent, Black on Orange;
[RESTRICTED WIDTH] D 2K; [MILES AHEAD] D 2K;

G20-53A

WIDE LOADS

OVER   G20-58A

EXIT HERE

36
4.5 6 13 6 4.5 6 4.5 6 13 4.5

11.8 — 17.8 — 6 — 24.6 — 11.8
8.3 — 19.4 — 6 — 30 — 8.3
16 — 15 — 6 — 19 — 16
72

2.3" Radius, 0.9" Border, 0.6" Indent, Black on Orange;
[WIDE LOADS] D 2K; [OVER] D 2K;
[EXIT HERE] D 2K;

G20-54A

NO WIDE

LOADS OVER
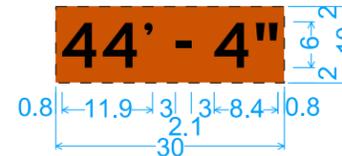
G20-58A

36
4.5 6 4.5 6 2.5 10 2.5

16.3 — 9.7 — 6 — 17.7 — 16.3
8 — 24.6 — 6 — 19.4 — 8
18 — 30 — 18
66

2.3" Radius, 0.9" Border, 0.6" Indent, Black on Orange;
[NO WIDE] D 2K; [LOADS OVER] D 2K;

G20-55A

RESTRICTED

WIDTH AHEAD

G20-58A

36
4.5 6 4.5 6 2.5 10 2.5

10.9 — 44.2 — 10.9
6 — 22.2 — 6 — 25.8 — 6
18 — 30 — 18
66
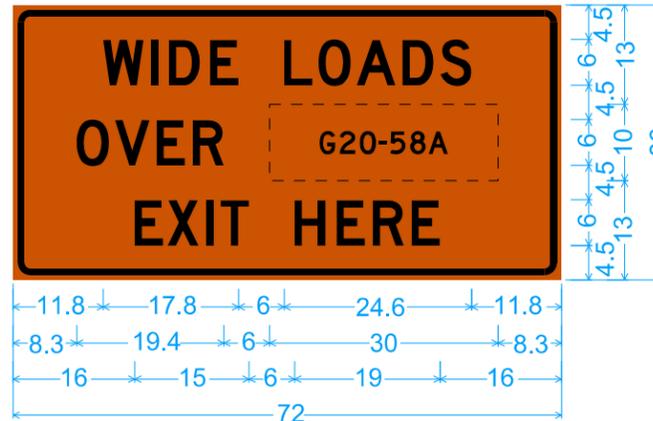
2.3" Radius, 0.9" Border, 0.6" Indent, Black on Orange;
[RESTRICTED] D 2K; [WIDTH AHEAD] D 2K;

G20-58A ①

44' - 4"

6 2 10 2

0.8 — 11.9 — 3 — 3 — 8.4 — 0.8
2.1
30

No border, Orange;
[44'] Black D 2K;
[-] Black D 2K;
[4"] Black D 2K;

G20-59A

4

6 2 10

2.8 — 4.5 — 2.7
10

No border, Orange;
[4] Black D 2K;

① See TC-81 for requirement of restricted width dimension.