



TYPE E

Two-piece fixed casting

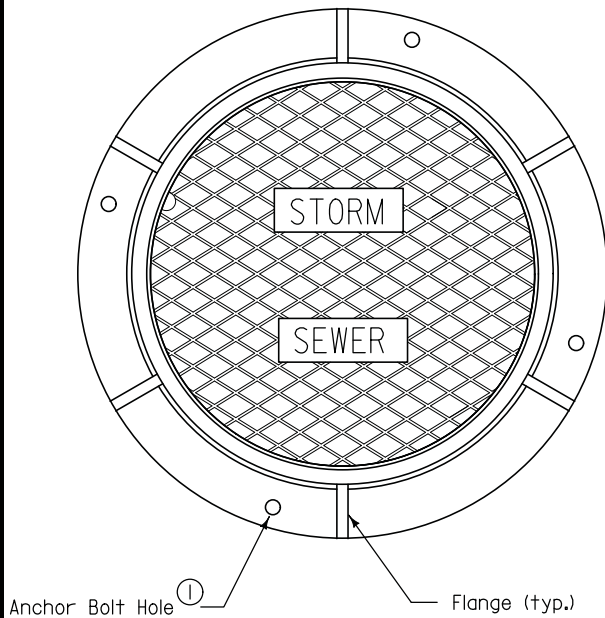

PLAN

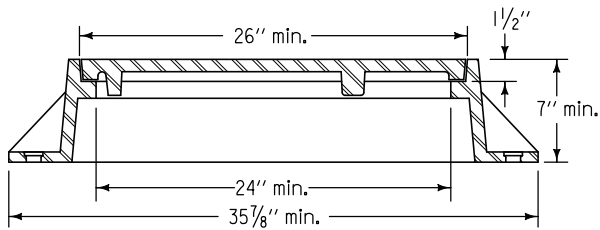


TYPICAL SECTION


FIGURE 6010.602 SHEET 1 OF 2

TYPE F

Three-piece floating casting

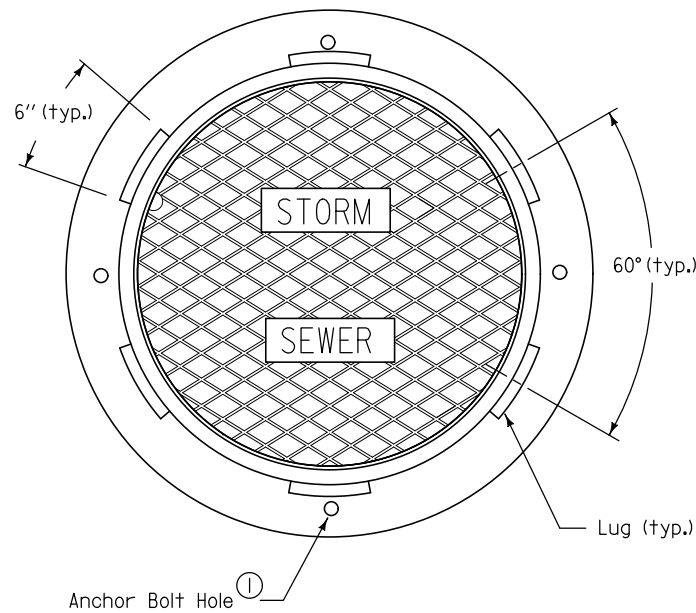

PLAN

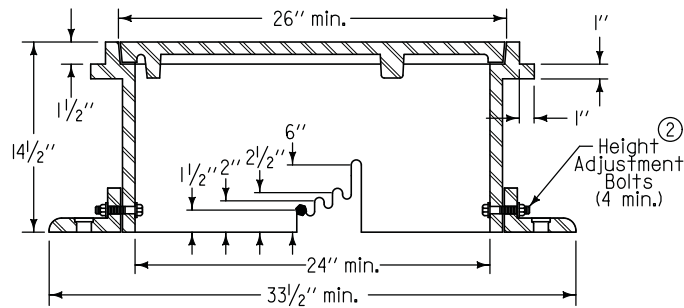

TYPICAL SECTION

Frame Notes:
Size and spacing of lugs and flanges may vary.


Cover Notes:
Roughness pattern and text styles may vary.
Minimum one concealed pickhole.

- ① If frame is required to be attached to structure, drill four $\frac{7}{8}$ " diameter holes or slots, equally spaced around frame.
- ② Remove bolts upon completion of paving.


		REVISION	
		NEW	04-21-09
		SW-602	
		SHEET 1 of 2	
FIGURE 6010.602		STANDARD ROAD PLAN	
REVISIONS: New. Replaces SUDAS Figures 6020.17, 6020.18, and 6020.19. Will replace RA-54.			
 SUDAS DIRECTOR		 DESIGN METHODS ENGINEER	
CASTINGS FOR STORM SEWER MANHOLES			

TYPE G
Two-piece fixed casting

Cover Notes:
Roughness pattern and text style may vary.
Minimum one concealed pickhole.

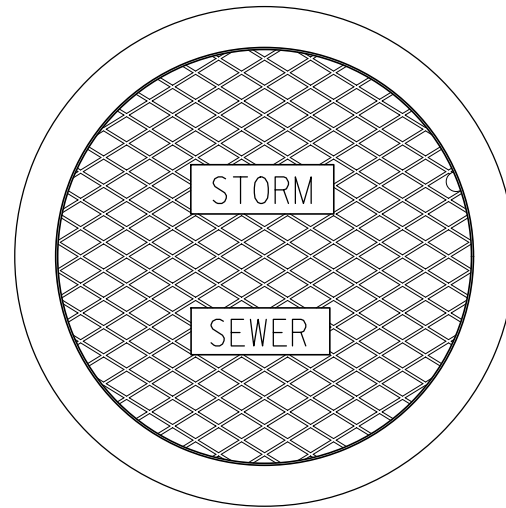

PLAN

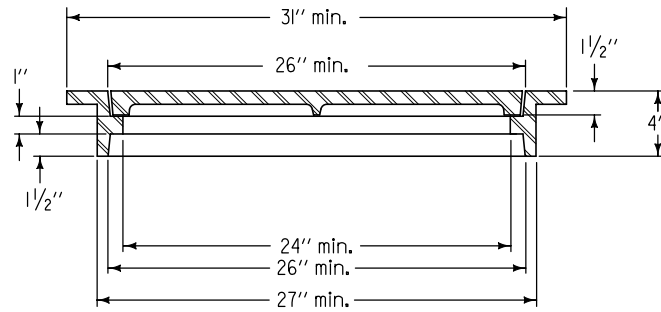

TYPICAL SECTION

 SUDAS	 Iowa Department of Transportation	REVISION	
		NEW	04-21-09
FIGURE 6010.602	STANDARD ROAD PLAN	SW-602	
		SHEET 2 of 2	
REVISIONS: New. Replaces SUDAS Figures 6020.17, 6020.18, and 6020.19. Will replace RA-54.			
 SUDAS DIRECTOR		 DESIGN METHODS ENGINEER	
CASTINGS FOR STORM SEWER MANHOLES			