

# SUDAS STANDARD SPECIFICATIONS

12"x $\frac{3}{8}$ " NAIL APPROXIMATELY  
ONE FOOT FROM EACH END  
OF EACH TIE AND DEADMAN  
(TYPICAL EACH COURSE)

FINISH GRADE

BATTER 1"- 2"/FT.

DEADMAN REQUIRED	
WALL HEIGHT	SPACING
2' OR LESS	NONE REQUIRED
BETWEEN 2'-4'	9'-2" C-C MAX.
4' OR GREATER	4'-8" C-C MAX.


STAGGER DEADMAN  
BETWEEN THIRD AND  
FOURTH COURSE FROM  
TOP WHEN SPACING  
4'-8" C-C.  
NAIL DEADMAN TO  
COURSE OR PROVIDE  
REBAR CONNECTION.

FINISH GRADE

6" MIN.

6" COMPACTED  
GRANULAR WALL  
FOUNDATION

SECTION A-A

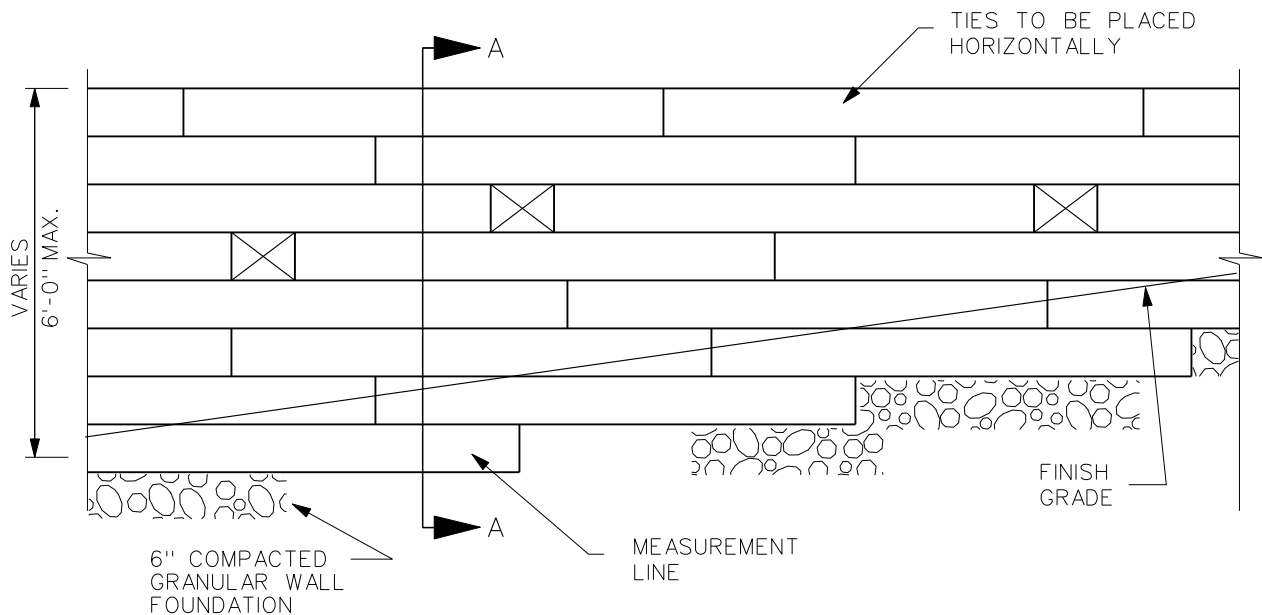

ELEVATION

REV.	DATE	BY	RAILROAD TIE WALLS & LANDSCAPE TIMBER WALLS	FIGURE: 9070.4
DATE: 03-03-98				SHEET 1 OF 1