
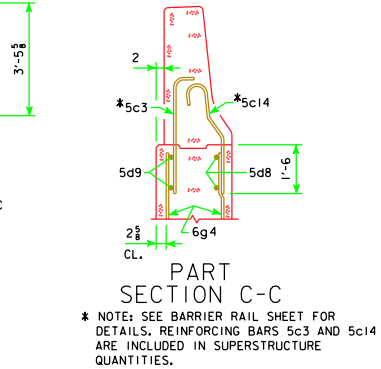
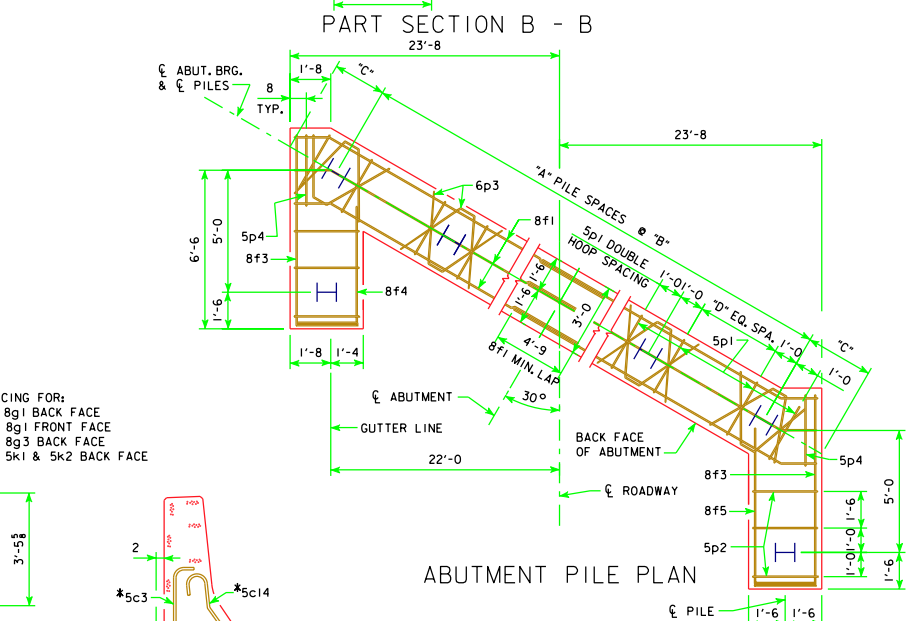
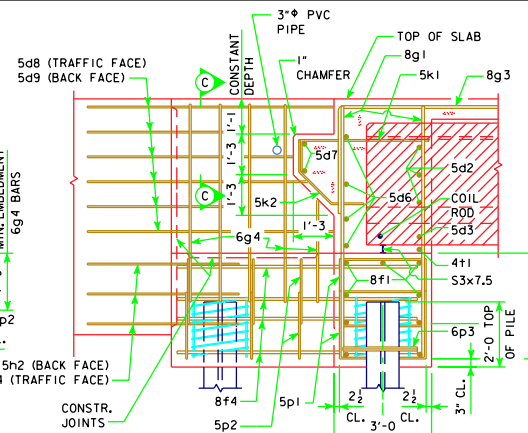


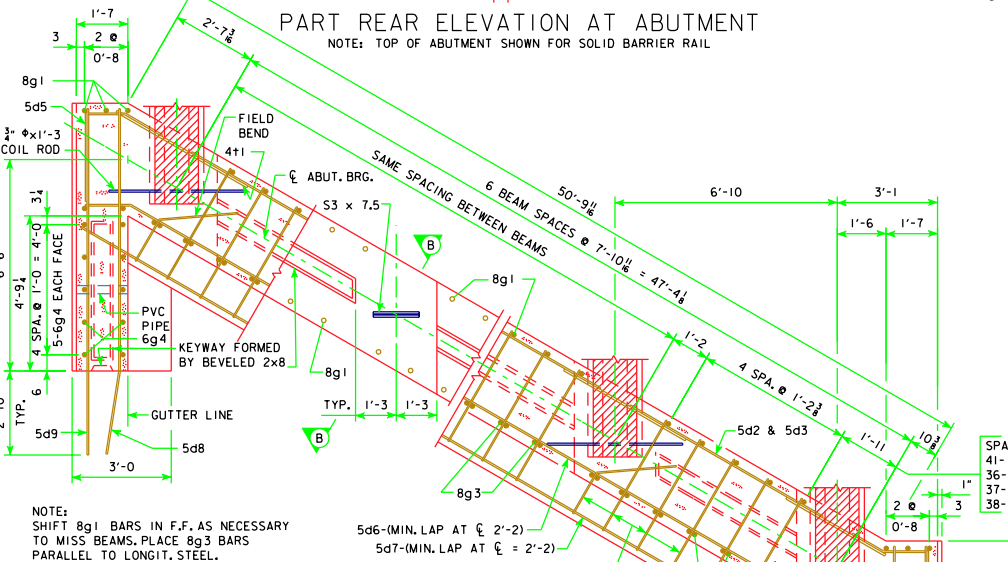

ABUTMENT PILE SPACING		ℰ-ℰ ABUT. BRG.	201'-4	213'-10	226'-4	243'-0
WITH STEEL H-PILES	"A" PILE SPACES		8	8	8	9
	"B" (FT. - IN.)		6'-2	6'-2	6'-2	5'-5
	"C" (FT. - IN.)		2'-7 ¹¹ / ₁₆	2'-7 ¹¹ / ₁₆	2'-7 ¹¹ / ₁₆	2'-11 ¹¹ / ₁₆
	"D" EQUAL SPACES		4	4	4	3
	NO. OF PILES PER ABUT.		11	11	11	12
①	PILE BEARING (TONS)		46	47	49	46
②	STEAMING I DESIGN LOAD (KIPS)		132	136	141	134

- ① FOR DETERMINING ACTUAL PILE LENGTHS IN FIELD.
- ② FOR ESTIMATING PILE LENGTHS USING AASHTO LRFD SPECIFICATIONS.