



MILLED RUMBLE STRIP

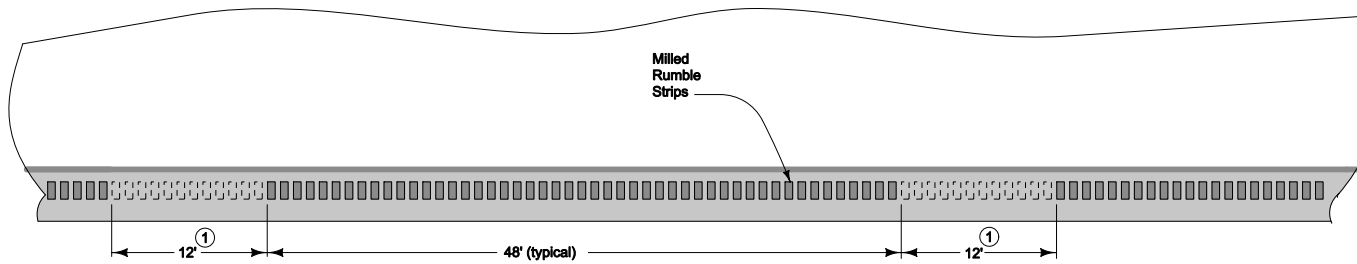


① Milled rumble strips shall be continuous (no 12-foot gaps) on all median-side shoulders and on all interstate shoulders.

Possible Contract Items:
 Asphalt Emulsion for Fog Seal (Shoulders)
 Milled Shoulder Rumble Strips, HMA Surface
 OR
 Milled Shoulder Rumble Strips, PCC Surface

	REVISION
	New 04-20-10
STANDARD ROAD PLAN	PV-12
REVISIONS: New. Replaces RH-64.	SHEET 1 of 2
<i>Deanna Mifflin</i> <small>APPROVED BY DESIGN METHODS ENGINEER</small>	
MILLED SHOULDER RUMBLE STRIPS	

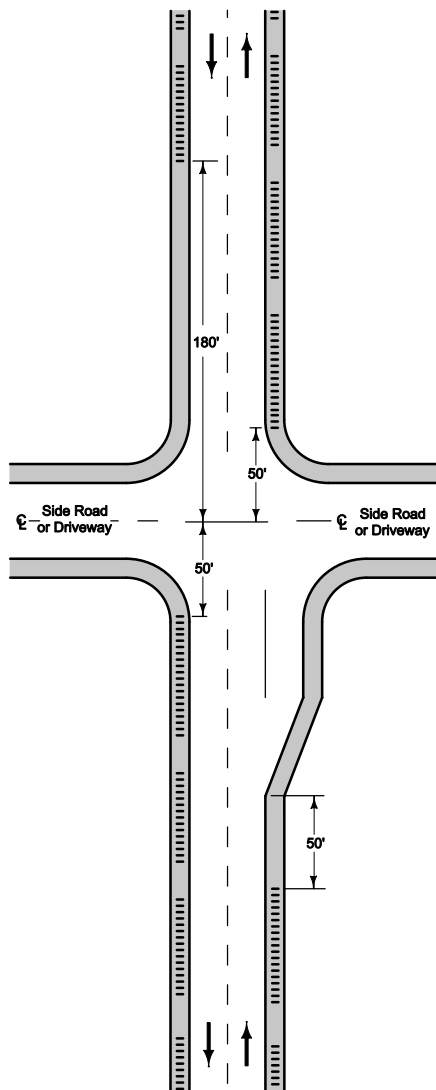


UNDIVIDED HIGHWAYS

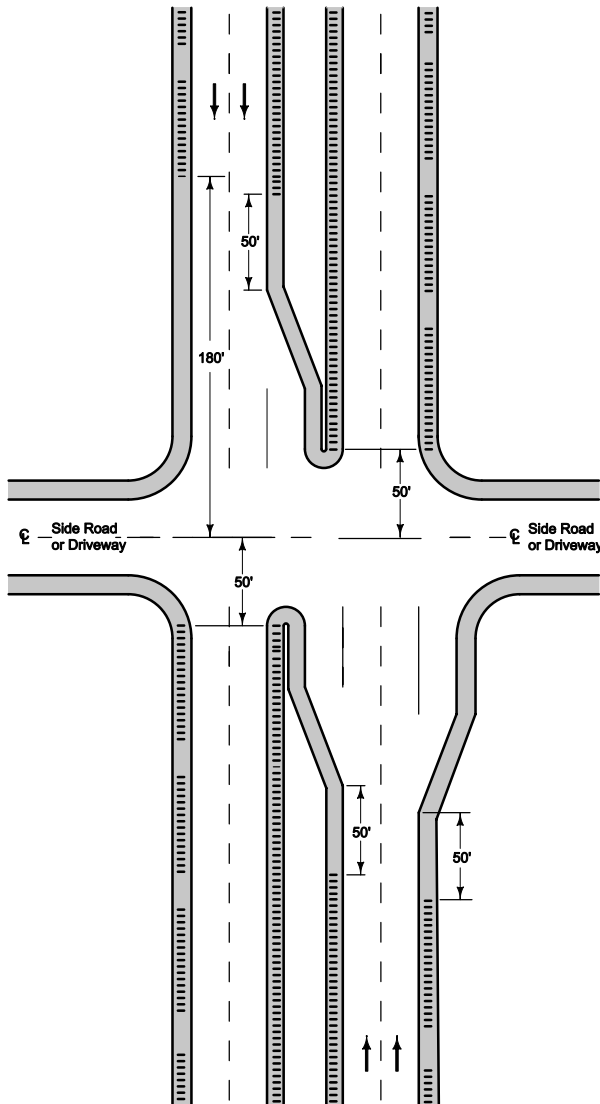


DIVIDED HIGHWAYS

INTERSECTION SITUATIONS

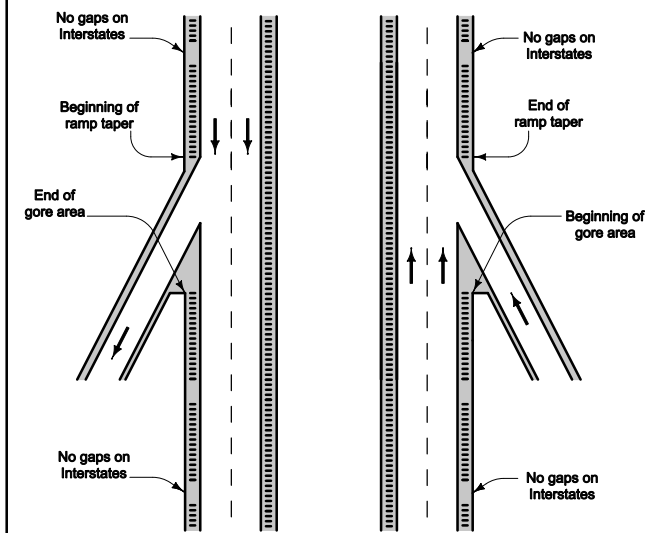

RAMP AND LOOPS ①

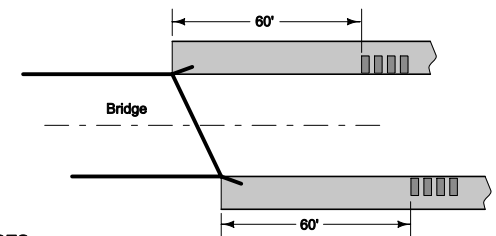

BRIDGES

① Milled rumble strips shall be continuous (no 12-foot gaps) on all median-side shoulders and on all interstate shoulders.

<p>Iowa Department of Transportation</p>	REVISION	
	New	04-20-10
STANDARD ROAD PLAN	PV-12	
REVISIONS: New. Replaces RH-64.	SHEET 2 of 2	

Deanna Mifflin
APPROVED BY DESIGN METHODS ENGINEER

MILLED SHOULDER RUMBLE STRIPS