



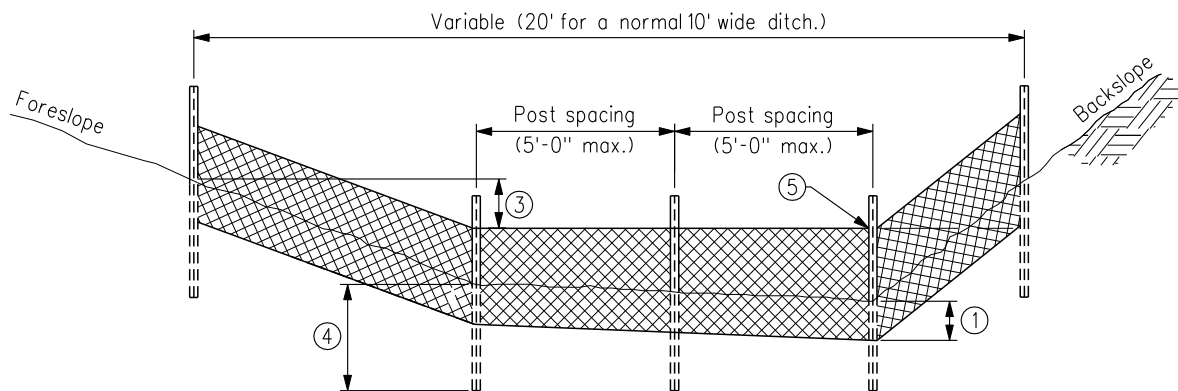

TYPICAL SILT FENCE DITCH CHECK

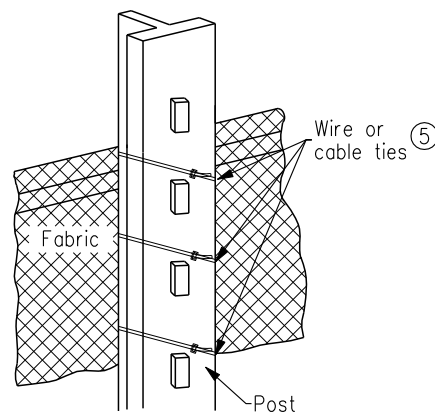

ATTACHMENT TO POST


GENERAL NOTES:

Install silt fence according to the requirements of Section 9040, 3.07 and at locations shown in the contract documents or as directed by the Jurisdictional Engineer.


- ① Insert 12 in. of fabric a minimum of 6 in. deep (fabric may be folded below the ground line)
- ② Compact ground by driving along each side of the silt fence as required to sufficiently secure the fabric in the trench to prevent pullout and flow under the fence.
- ③ In ditches, extend silt fence up side slope so the bottom elevation at the end of the fence is a minimum of 2 in. higher than the top of the fence in the low point of the ditch.
- ④ Steel posts to be embedded 20 in. unless otherwise allowed by the Jurisdictional Engineer.
- ⑤ Secure top of engineering fabric to steel posts using wire or plastic ties (50 lb. min.). See details of "Attachment to Posts."

 SUDAS	REVISION	
	NEW	10/17/06
	FIGURE 9040.19	
	SHEET 1 OF 2	

SILT FENCE

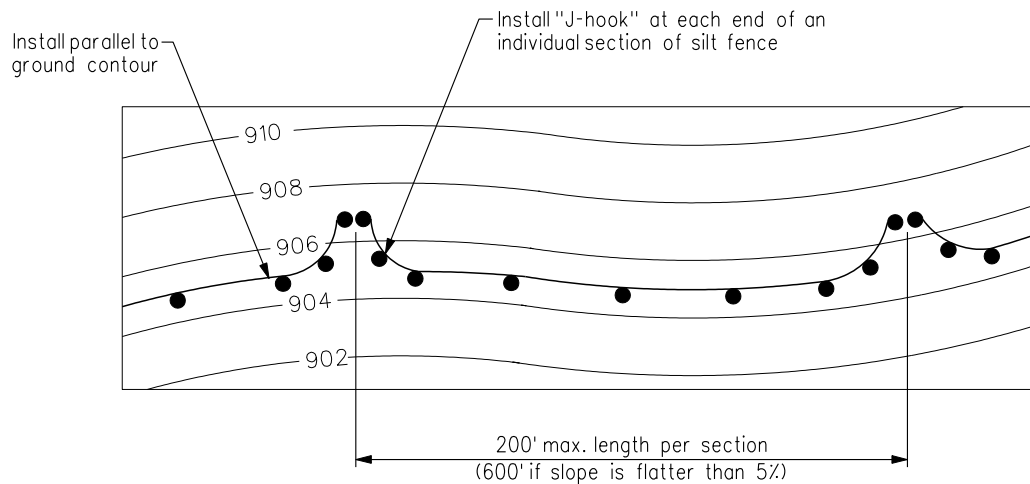


TYPICAL SILT FENCE INSTALLATION ON LONGITUDINAL SLOPES
(Plan View)

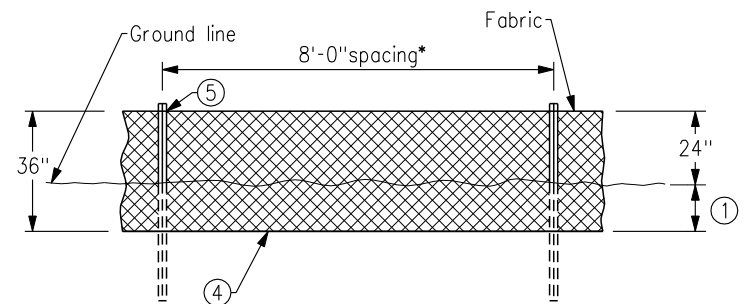

DETAILS OF SILT FENCE ON LONGITUDINAL SLOPES

*Reduce post spacing to 5'-0" at water concentration areas, or as required to adequately support fence

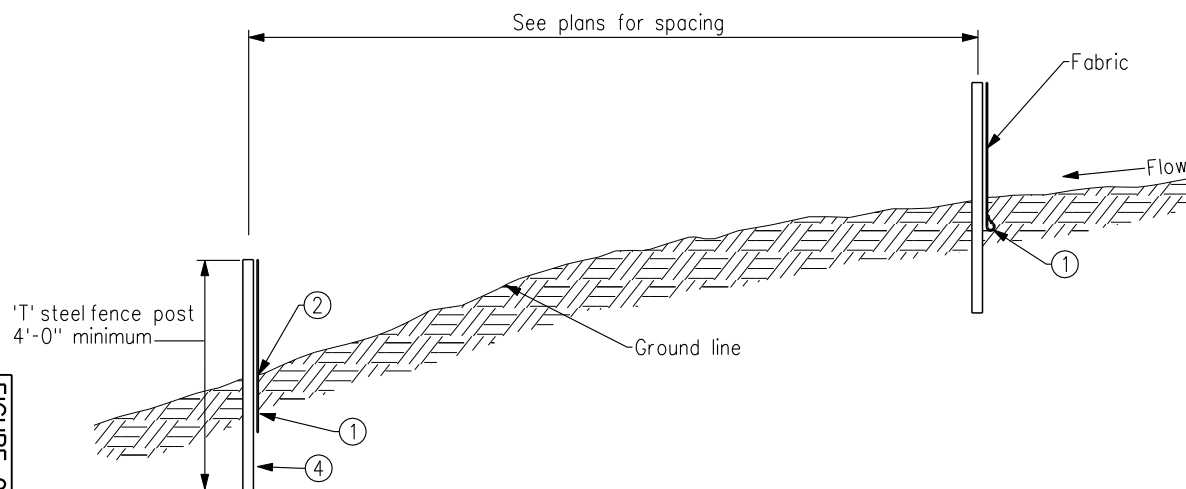

TYPICAL SILT FENCE INSTALLATION ON LONGITUDINAL SLOPES
(Profile View)

	REVISION	
	NEW	10/17/06
	FIGURE 9040.19	
	SHEET 2 OF 2	
SILT FENCE		