

SUDAS STANDARD SPECIFICATIONS

12"x $\frac{3}{8}$ " NAIL APPROXIMATELY
ONE FOOT FROM EACH END
OF EACH TIE AND DEADMAN
(TYPICAL EACH COURSE)

FINISH GRADE

BATTER 1"- 2"/FT.

DEADMAN REQUIRED	
WALL HEIGHT	SPACING
2' OR LESS	NONE REQUIRED
BETWEEN 2'-4'	9'-2" C-C MAX.
4' OR GREATER	4'-8" C-C MAX.


STAGGER DEADMAN
BETWEEN THIRD AND
FOURTH COURSE FROM
TOP WHEN SPACING
4'-8" C-C.
NAIL DEADMAN TO
COURSE OR PROVIDE
REBAR CONNECTION.

FINISH GRADE

6" MIN.

6" COMPACTED
GRANULAR WALL
FOUNDATION

SECTION A-A

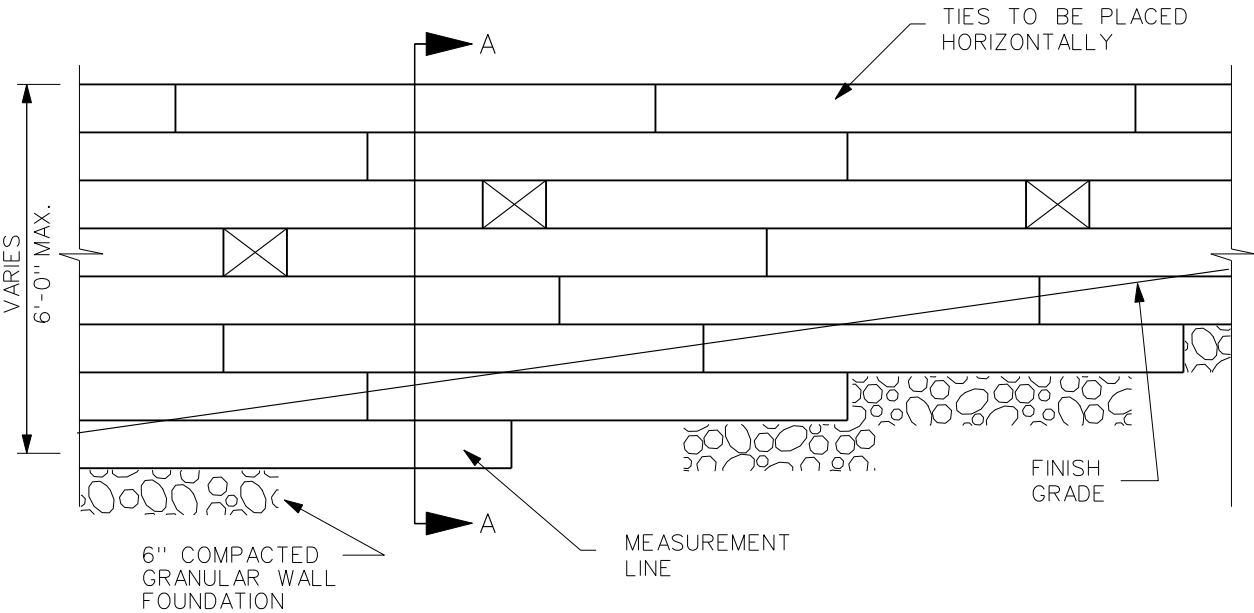

ELEVATION

REV.	DATE	BY	RAILROAD TIE WALLS & LANDSCAPE TIMBER WALLS	FIGURE: 9070.4
DATE: 03-03-98				SHEET 1 OF 1