



REVISED 07-10 - THE SPECIFICATION REFERENCES WERE CHANGED. THE BEAM DATA WAS UPDATED TO THE CURRENT BEAMS.

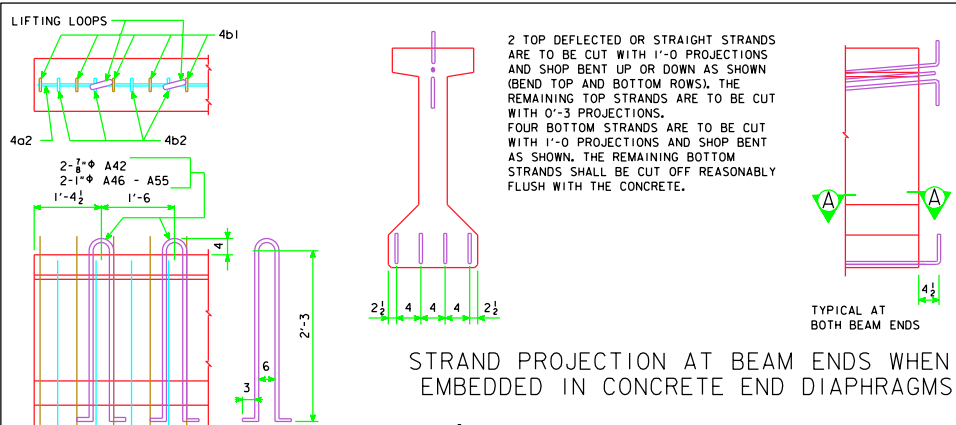

STRAND PROJECTION AT BEAM ENDS WHEN EMBEDDED IN CONCRETE END DIAPHRAGMS

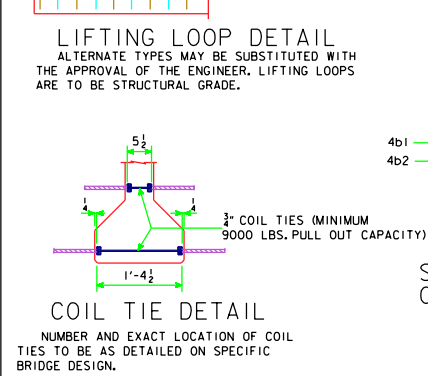

SECTION A-A SHOWING PLACEMENT OF STIRRUPS NEAR END OF BEAM

REINFORCING BAR LIST									
BEAM	SPAN	A42	A46	A50	A55				
BAR	SHAPE	NO.	LENGTH	NO.	LENGTH	NO.	LENGTH	NO.	LENGTH
5a1		4	22'-10"	4	24'-11"	4	27'-0"	4	29'-1"
4a2		2	3'-3"	2	3'-3"	2	3'-3"	2	3'-3"
4b1		40	6'-8"	44	6'-8"	46	6'-8"	50	6'-8"
4b2		12	5'-0"	12	5'-0"	8	5'-0"	8	5'-0"
4b5						8	2'-9"	12	2'-9"
3c1		40	1'-3"	44	1'-3"	46	1'-3"	50	1'-3"
3d		104	2'-8"	112	2'-8"	108	2'-8"	116	2'-8"
3e		20	1'-6"	20	1'-6"	18	1'-6"	18	1'-6"

ALL DIMENSIONS ARE OUT TO OUT. RADIUS TO ϕ BAR. D = PIN DIAMETER.

A BEAM DATA																				
BEAM	SPAN LENGTH 6'- ϕ BEARING	OVERALL BEAM LENGTH (L)	STRAND SIZE	NO. OF STRANDS		TOTAL INITIAL PRESTRESS KIPS	HOLD DOWN FORCE-KIPS	CAMBER (in.)				DEFLECTION (in.) Δ_D				PERMISSIBLE SPACING		WEIGHT (TONS)	CONCRETE (C. Y.)	REINFORCING STEEL (ID)
				STRAIGHT	NO. DEFLECTED			AT RELEASE	AFTER LOSSES	IMMEDIATE ^① (ELASTIC) Δ_1	TIME (PLASTIC) Δ_T	HL93 LOADING								
												CONC. DIAPH.	STEEL DIAPH.	CONC. DIAPH.	STEEL DIAPH.	CONC. DIAPH.	STEEL DIAPH.			
A42	42'-6	43'-6	0.6"	7	2	383	9.3	0.70		1.24		0.38	0.35	0.09	0.09	7'-6	7'-6	7.1	3.49	452
A46	46'-8	47'-8	0.6"	8	2	426	8.5	0.76		1.35		0.50	0.47	0.13	0.12	7'-6	7'-6	7.7	3.82	488
A50	50'-10	51'-10	0.6"	9	3	510.9	11.7	1.02		1.82		0.69	0.65	0.17	0.16	7'-6	7'-6	8.4	4.15	503
A55	55'-0	56'-0	0.6"	10	3	553.4	10.8	1.29		2.30		0.94	0.88	0.23	0.22	7'-6	7'-6	9.1	4.49	547

- ① DEFLECTIONS AT MID-SPAN DUE TO WEIGHT OF SLAB AND DIAPHRAGM. THE DEFLECTIONS SHOWN ARE FOR A SLAB WEIGHT OF 757 #/FT. (8" SLAB AND 7'-6" BEAM SPACING) AND ONE CONCRETE DIAPHRAGM (1912 #) OR ONE STEEL DIAPHRAGM (285 #) AT ϕ OF SPAN. FOR DIFFERENT SLAB AND DIAPHRAGM WEIGHTS, DEFLECTIONS WILL BE DIRECTLY PROPORTIONAL.
- ② DEFLECTIONS DUE TO THE COMBINED EFFECT OF CREEP DUE TO WEIGHT OF SLAB AND SHRINKAGE OF SLAB.
- TOTAL BEAM DEFLECTIONS AT ϕ OF SPAN, Δ_D , DUE TO WEIGHT OF SLAB AND DIAPHRAGMS FOR DETAILING PURPOSE:
- (A) $\Delta_D = \Delta_1 + \Delta_2$ FOR SIMPLE SPAN.
- (B) $\Delta_D = \Delta_1 + 3\Delta_2$ FOR END SPANS OF CONTINUOUS BRIDGE.
- (C) $\Delta_D = \Delta_1 + 2\Delta_2$ FOR INTERIOR SPANS OF CONTINUOUS BRIDGE.
- ③ TOTAL INITIAL PRESTRESS IS BASED ON 72.6% f'_s , $f'_s = 270$ ksi AND $A_s = 0.217$ sq. in.

* MINIMUM CONCRETE f'_c (AT 28 DAYS) SHALL BE 7,000 psi. MINIMUM f'_c AT RELEASE SHALL BE 6,000 psi.

SPECIFICATIONS:

CONSTRUCTION: STANDARD SPECIFICATIONS OF THE IOWA DEPARTMENT OF TRANSPORTATION, CURRENT SERIES, WITH CURRENT APPLICABLE SPECIAL PROVISIONS AND SUPPLEMENTAL SPECIFICATIONS.

DESIGN: A.A.S.H.T.O. LRFD, SERIES OF 2004, WITH MINOR MODIFICATIONS.

DESIGN STRESSES:

DESIGN STRESSES FOR THE FOLLOWING MATERIALS ARE TO BE IN ACCORDANCE WITH A.A.S.H.T.O. LRFD SPECIFICATIONS FOR HIGHWAY BRIDGES, SERIES OF 2004:

REINFORCING STEEL IN ACCORDANCE WITH SECTION 5, GRADE 60.

CONCRETE IN ACCORDANCE WITH SECTION 5, $f'_c = 5000$ psi (EXCEPT AS NOTED)

PRESTRESSING STEEL IN ACCORDANCE WITH SECTION 5, $f'_s = 270,000$ psi.

NOTES:

- THESE BEAMS ARE DESIGNED FOR AASHTO LIVE LOADS AS INDICATED IN ABOVE TABLE WITH AN ALLOWANCE OF 20 LB. PER SQUARE FOOT OF ROADWAY FOR FUTURE WEARING SURFACE.
- HOLD DOWN POINTS FOR DEFLECTED STRANDS MAY BE MOVED TOWARD ENDS OF BEAM A DISTANCE OF 0.05 L MAXIMUM AT PRODUCER'S OPTION.
- ALL PRESTRESSING STRANDS SHALL CONFORM TO ASTM A416 GRADE 270 LOW RELAXATION STRANDS.
- TOPS OF BEAMS ARE TO BE STRUCK OFF LEVEL AND FINISHED AS PER MATERIALS IM570.
- BEARINGS SHALL BE AS DETAILED ON OTHER DESIGN SHEETS.
- BEAMS TO BE USED IN BRIDGES MADE CONTINUOUS BY THE POURED IN PLACE FLOOR, ARE TO BE AT LEAST 28 DAYS OLD BEFORE THE FLOOR IS PLACED UNLESS A SHORTER CURING TIME IS APPROVED BY THE BRIDGE ENGINEER.
- THE PORTIONS OF THE PRESTRESS BEAMS THAT ARE TO BE EMBEDDED IN THE ABUTMENT AND PIER DIAPHRAGMS SHALL BE ROUGHENED FOR A DISTANCE OF 10" FROM THE BEAM END BY SANDBLASTING OR OTHER APPROVED METHODS TO PROVIDE SUITABLE BOND BETWEEN THE BEAM AND THE DIAPHRAGM IN ACCORDANCE WITH ARTICLE 2403.14 OF THE SPECIFICATIONS.
- ALL BEAMS ARE TO BE INCREASED IN LENGTH TO COMPENSATE FOR ELASTIC SHORTENING, CREEP AND SHRINKAGE.
- IF THE STEEL DIAPHRAGM OPTION IS ALLOWED AND USED, HOLES MUST BE CAST IN THE WEB TO ACCOMMODATE THE STEEL DIAPHRAGM ATTACHMENTS AS DETAILED ON THE STEEL DIAPHRAGM DETAIL SHEET.
- IF SOLE PLATE IS REQUIRED FOR BEARING, SOLE PLATE IS TO BE SET IN FORMS WHEN BEAM IS CAST AND FORMED OUT BELOW TO EXCLUDE CONCRETE AS DETAILED ON THE BEARING SHEET.
- 0.6" DIAMETER STRANDS STRESSED TO NOT MORE THAN 5,000 LBS. EACH MAY BE USED IN LIEU OF THE ϕ BARS WHICH RUN THE FULL LENGTH OF THE BEAM IN THE TOP FLANGE.

LATEST REVISION DATE

07-10

APPROVED BY BRIDGE ENGINEER

STANDARD DESIGN - 30' ROADWAY, THREE SPAN BRIDGES

PRETENSIONED PRESTRESSED CONCRETE BEAM BRIDGES

DECEMBER, 2006

A BEAM DETAILS

H30-32-06