




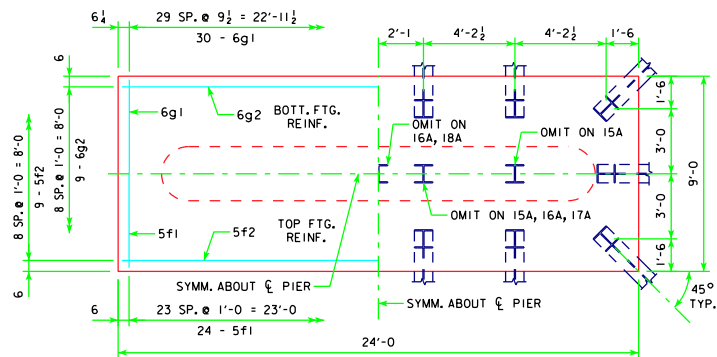


4'-0" x 9'-0" x 24'-0" FOR 15A, 16A, 17A & 18A

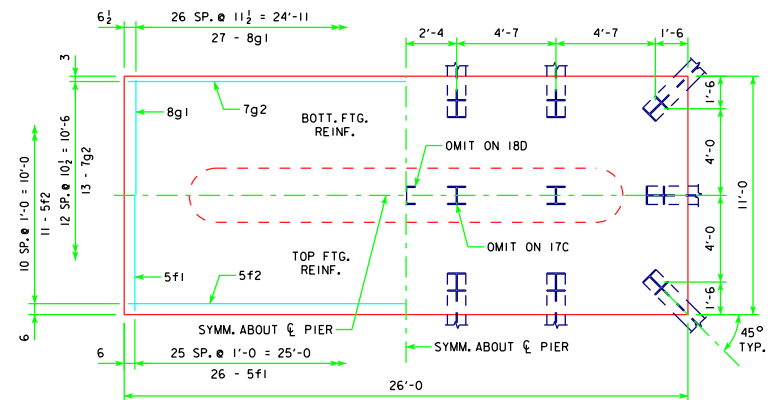


4'-0" x 11'-0" x 26'-0" FOR 17C & 18D

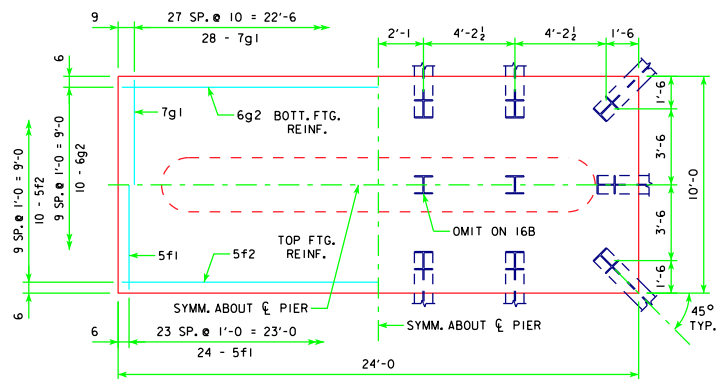

4'-0" x 10'-0" x 24'-0" FOR 16B & 18B

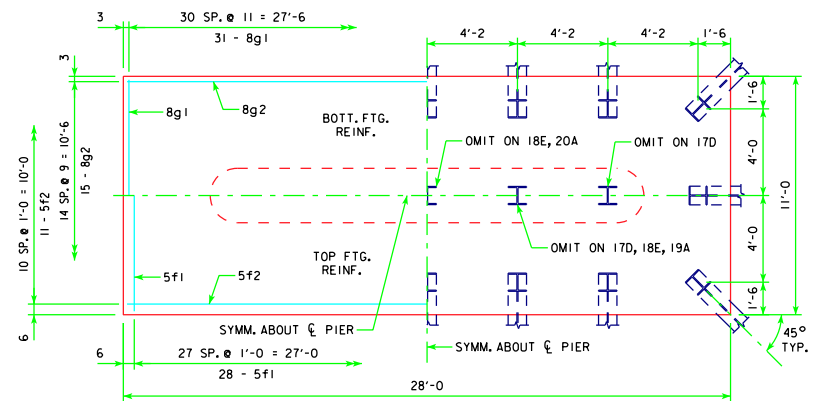

4'-0" x 11'-0" x 28'-0" FOR 17D, 18E, 19A, 20A & 21A

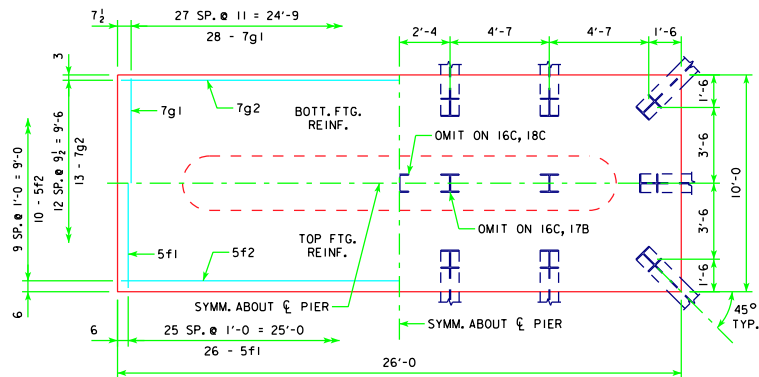

4'-0" x 10'-0" x 26'-0" FOR 16C, 17B & 18C

NOTE:
SEE SHEET RS40-118-10 FOR FOOTING NOTES.

LATEST REVISION DATE	<i>Thomas L. McDaniel</i> APPROVED BY BRIDGE ENGINEER	 Iowa Department of Transportation Highway Division	
		STANDARD DESIGN - 40' ROADWAY, 3 SPAN BRIDGES ROLLED STEEL BEAM BRIDGES JUNE, 2010	
		TEE PIER - 50 TON STEEL PILE FOOTINGS 0° SKEW - SHEET 2	RS40-119-10