


PLAN

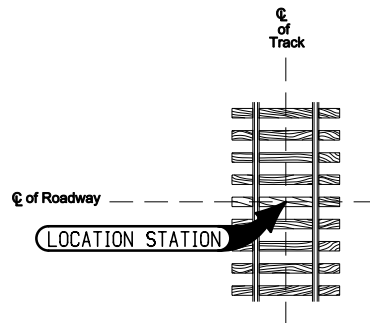

For grading requirements, refer to RL-14.

For additional guardrail requirements, refer to BA-200.

- ① Cover entire face of terminal section with alternating black and yellow striped adhesive sheeting. Stripes shall be approximately 3 inches in width and shall be sloped down at an angle of 45 degrees toward the side on which traffic is to pass the end anchorage. Yellow stripes shall meet the retroreflectivity requirements for Type III or Type IV reflective sheeting.
- ② Refer to BA-205.

Possible Contract Items:  
 Steel Beam Guardrail End Anchor, Thrie-Beam  
 Steel Beam Guardrail End Terminal

Possible Tabulation:  
 108-8D

 Iowa Department of Transportation	REVISION
	New 04-20-10
<b>STANDARD ROAD PLAN</b>	<b>BA-253</b>
	SHEET 1 of 1

REVISIONS: New. Replaces RE-83.

*Deanna Maifeld*  
 APPROVED BY DESIGN METHODS ENGINEER

**STEEL BEAM GUARDRAIL  
 INSTALLATION AT RAILROAD SIGNAL**