




SECTION A-A

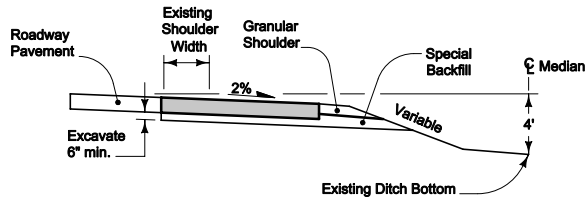


SECTION B-B

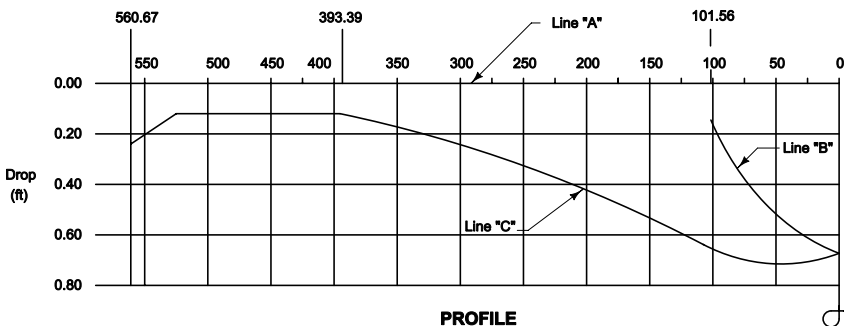

PROFILE

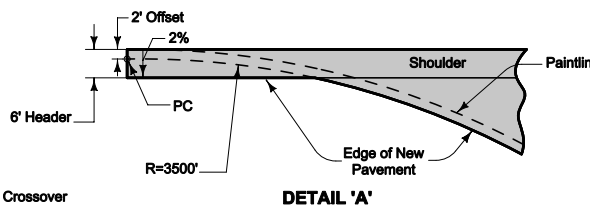


DETAIL 'A'

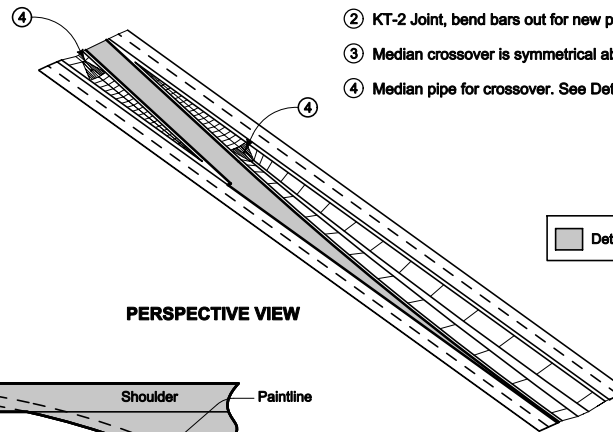

PERSPECTIVE VIEW

Detour Pavement options: 9" PCC or 12" HMA

- ① Match existing roadway joints. 'CD' joints are required. See PV-1.
- ② KT-2 Joint, bend bars out for new pavement only.
- ③ Median crossover is symmetrical about centerline.
- ④ Median pipe for crossover. See Detail 500-19.

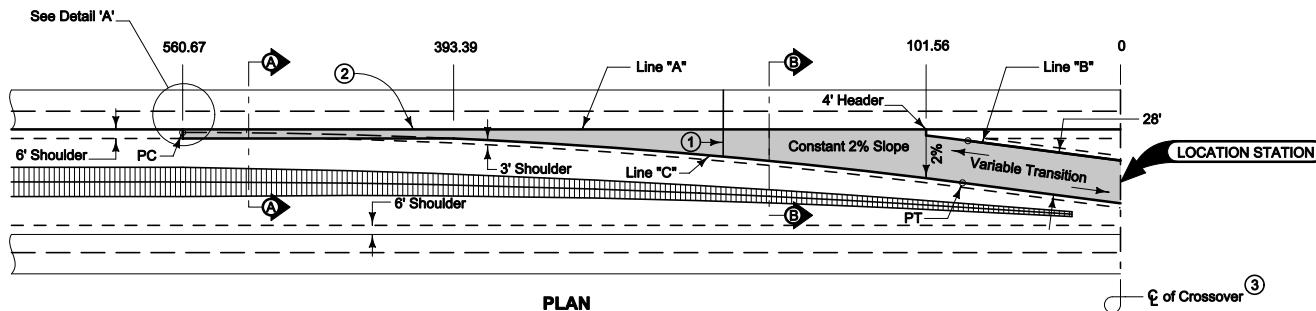

PLAN

DESIGN QUANTITY TABLE		
Detour Pavement Sq. Yds.	Special Backfill Tons	Granular Shoulder Tons
1970	1420	130

Possible Contract Items:  
 Detour Pavement  
 Embankment In Place  
 Excavation, Class 10, Roadway and Borrow  
 Excavation, Class 13, Roadway and Borrow  
 Granular Shoulder  
 Removal of Pavement  
 Special Backfill

Possible Tabulation:  
 112-8

TABLE OF OFFSETS AND DROPS																							
Distance (Feet)	560.67	550	500	450	400	393.39	375	350	325	300	275	250	225	200	175	150	125	101.56	100	75	50	25	0
Offset A to C (Feet)	6.00	6.00	6.00	6.00	6.00	6.00	6.93	8.35	9.94	11.72	13.68	15.81	18.13	20.63	23.31	26.18	29.22	32.24	32.45	35.84	39.27	42.70	46.13
Drop A to C (Feet)	0.24	0.22	0.12	0.12	0.12	0.12	0.14	0.17	0.20	0.23	0.27	0.32	0.36	0.41	0.47	0.52	0.58	0.64	0.66	0.70	0.71	0.72	0.68
Drop A to B (Feet)																		0.08	0.16	0.38	0.52	0.61	0.68

Iowa Department of Transportation  
**STANDARD ROAD PLAN**  
 REVISIONS: New. Replaces RV-13C. Revised table of offsets and drops.  
 REVISION New 04-20-10  
**PV-505**  
 SHEET 1 of 1

Deanna Maifeld  
 APPROVED BY DESIGN METHODS ENGINEER  
**MEDIAN CROSSOVER**  
**(64' MEDIAN)**  
**28' WIDE 2 LANE**