


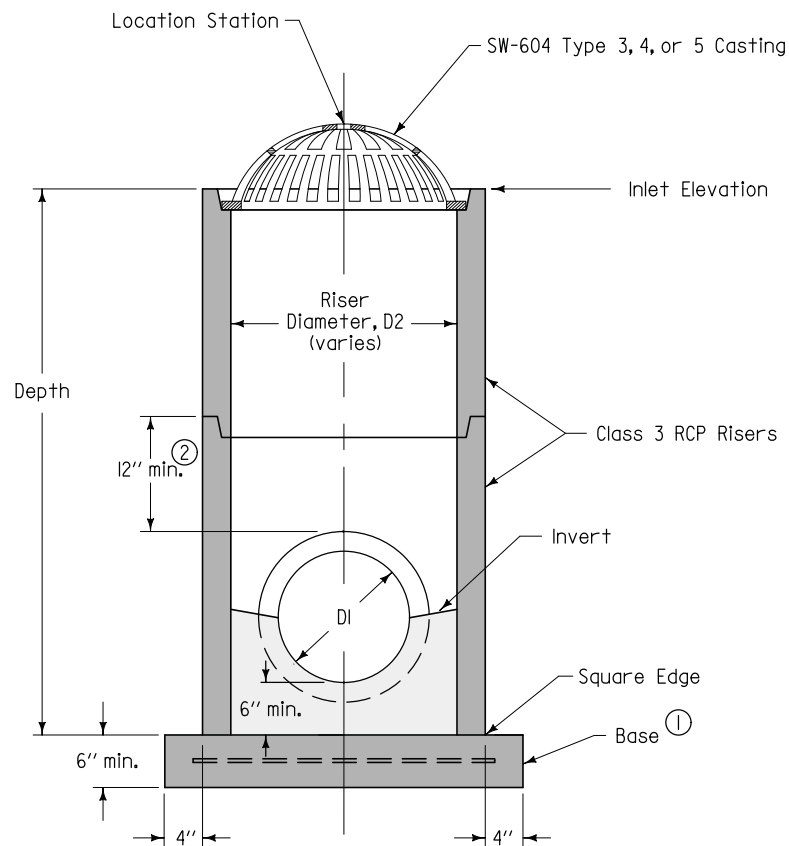

TYPICAL SECTION

CASE I

① Precast (shown) or cast-in-place base:

- Precast: 6-inch thick concrete with #6 welded wire mesh on 4-inch centers (WWF 4" x 4"). Center mesh vertically within base.


- Cast-in-place: 8-inch thick non-reinforced concrete.

② 12-inch minimum riser height above all pipes.

INTAKE SIZE - CASE I	
Outlet Pipe Diameter, D1	Minimum Riser Diameter, D2
12"	18"
15"	24"
18"	24"
21"	30"
24"	30"
27"	36"

SUDAS	Iowa Department of Transportation	REVISION
		1 10-20-09
FIGURE 6010.512		SW-512
STANDARD ROAD PLAN		SHEET 1 of 2
REVISIONS: Changed circle notes 1 & 2 and shading. Added sheet 2.		
SUDAS DIRECTOR	Deanna Mairfeld DESIGN METHODS ENGINEER	
CIRCULAR AREA INTAKE		

③ Minimum riser diameter is 18 inches.

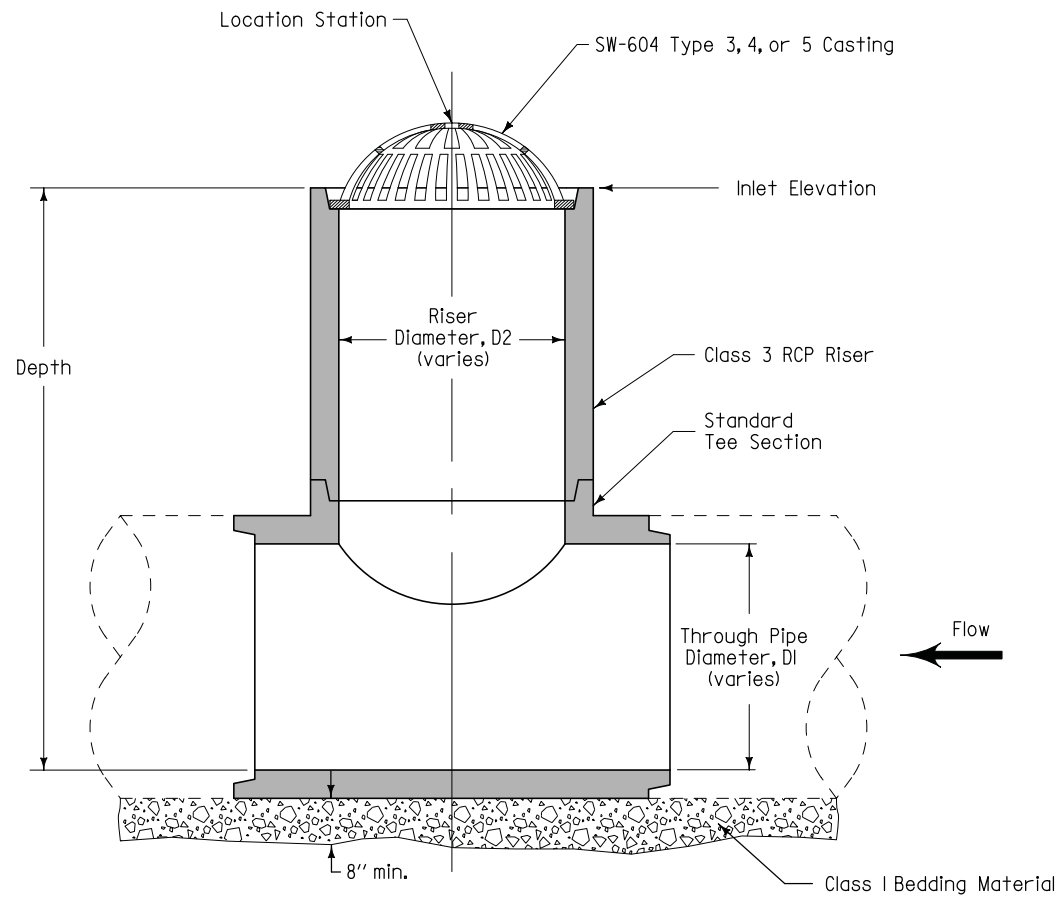

TYPICAL SECTION

CASE 2

INTAKE SIZE - CASE 2	
Through Pipe Diameter, D1	Maximum Riser Diameter, D2 ③
18"	18"
21"	18"
24"	24"
27"	24"
30"	30"
36" or more	36"

SUDAS	Iowa Department of Transportation	REVISION
		1 10-20-09
FIGURE 6010.512	STANDARD ROAD PLAN	SW-512
		SHEET 2 of 2
REVISIONS: Changed circle notes 1 & 2 and shading. Added sheet 2.		
 SUDAS DIRECTOR	 DESIGN METHODS ENGINEER	
CIRCULAR AREA INTAKE		