




GUTTERLINE JOINTING

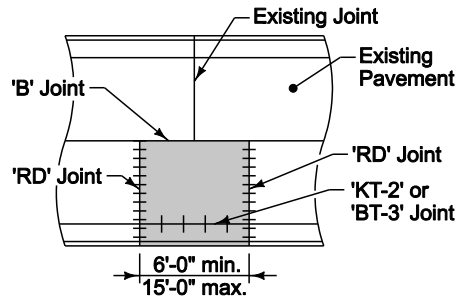

ONE PANEL WIDTH PATCH
WITH OPPOSING JOINT

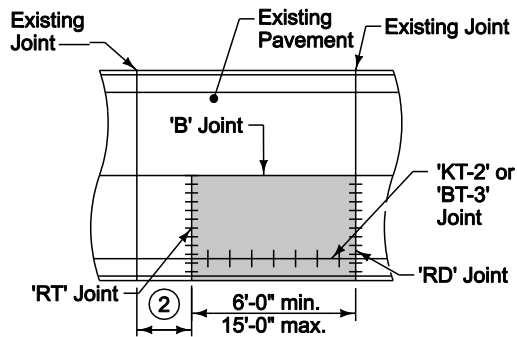


ONE PANEL WIDTH PATCH
NO OPPOSING JOINT

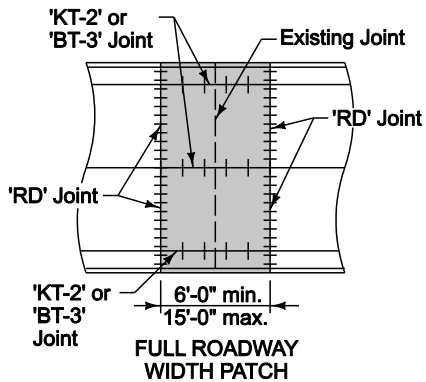


FULL ROADWAY
WIDTH PATCH


THIRD POINT JOINTING ①

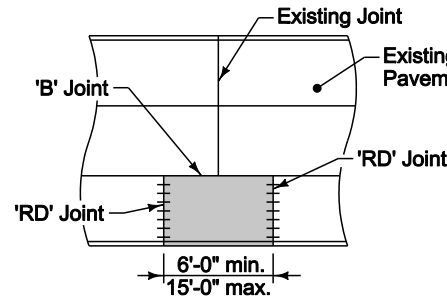


OUTSIDE PANEL PATCH
WITH OPPOSING JOINT

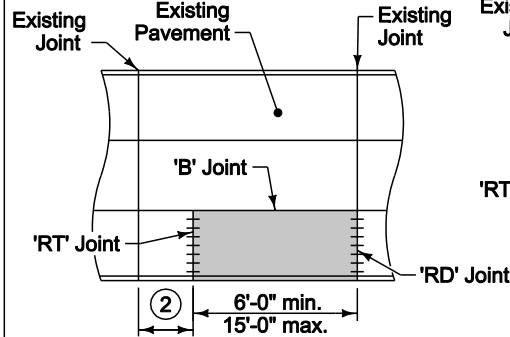


OUTSIDE PANEL PATCH
NO OPPOSING JOINT

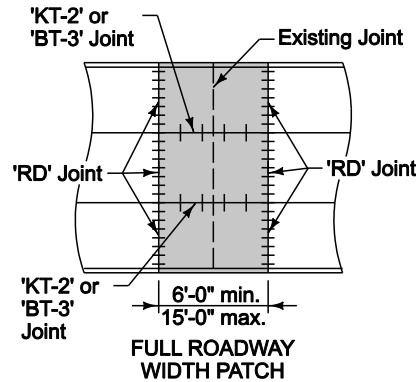


FULL ROADWAY
WIDTH PATCH

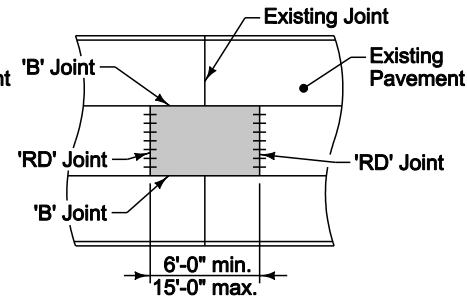

CENTER PANEL PATCH
WITH OPPOSING JOINTS

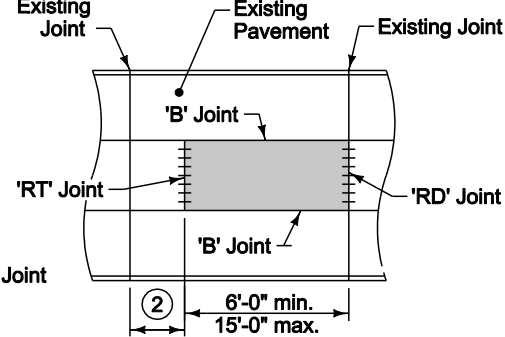


CENTER PANEL PATCH
NO OPPOSING JOINT

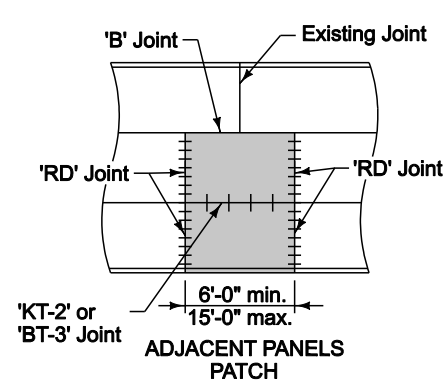

ADJACENT PANELS
PATCH

- ① Patches on roadways with quarter point jointing will be similar to third point jointing details.
- ② Minimum distance between existing joint and patch is 6 feet. If distance is less than 6 feet, extend patch to existing joint.
- ③ When subgrade or subbase material is required below patch, bring material to bottom of pavement and match existing patch thickness.

LONGITUDINAL SECTION THRU PCC PATCH

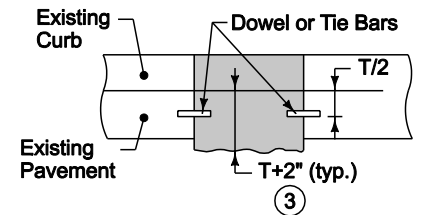

	REVISION	
	New	10-19-10
	7040.101	
	SHEET 1 of 1	
SUDAS Standard Specifications		
FULL DEPTH PCC PATCHES LESS THAN OR EQUAL TO 15' LONG		