



GUTTERLINE JOINTING

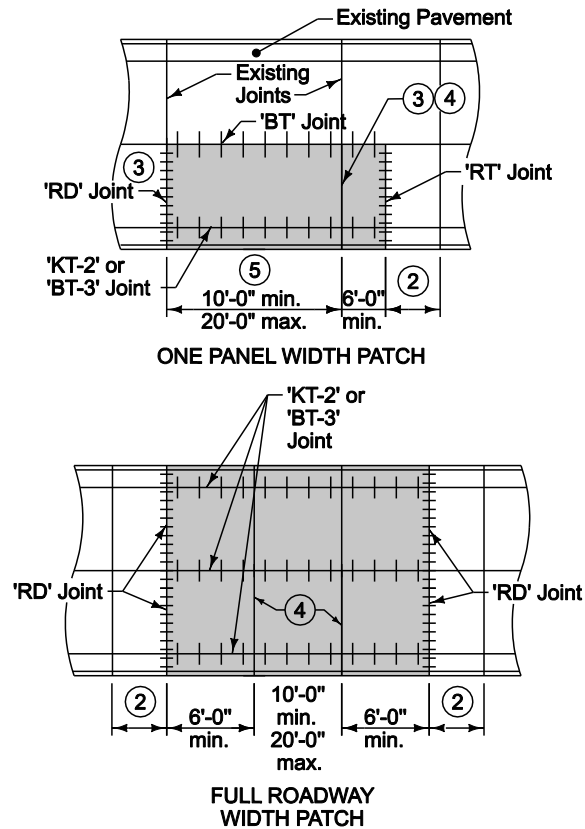


THIRD POINT JOINTING ①

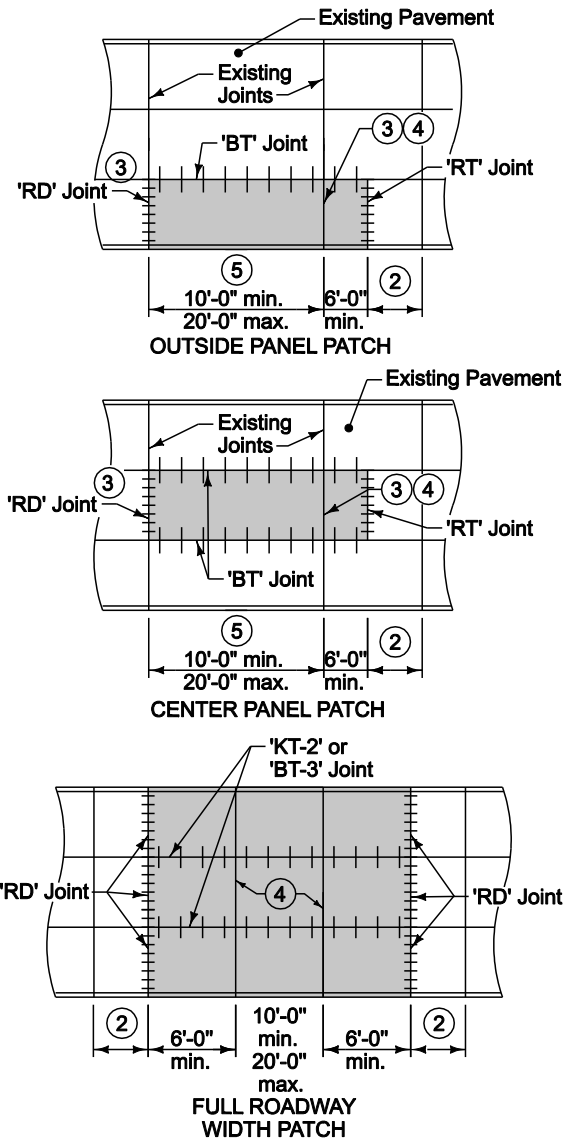

- ① Patches on roadways with quarter point jointing will be similar to third point jointing details.
- ② Minimum distance between existing joint and patch is 6 feet. If distance is less than 6 feet, extend patch to existing joint.
- ③ Match existing joint type and locations.
- ④ 'C' joint unless 'CD' joint is specified.
- ⑤ If existing joint spacing is greater than 20 feet, add a 'CT' joint at mid-panel.
- ⑥ When subgrade or subbase material is required below patch, bring material to bottom of pavement and match existing patch thickness.

LONGITUDINAL SECTION THRU PCC PATCH

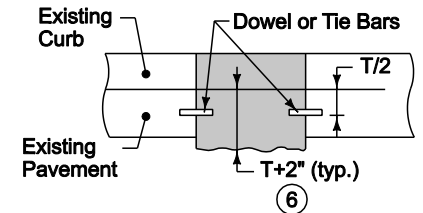

	REVISION	
	New	10-19-10
	7040.102 SHEET 1 of 1	
SUDAS Standard Specifications		
FULL DEPTH PCC PATCHES GREATER THAN 15' LONG		